


- * press **home button** to turn on the controller.
- * hold **home button** for 3 seconds to turn off the controller.
- * hold **home button** for 8 seconds to force the controller off.

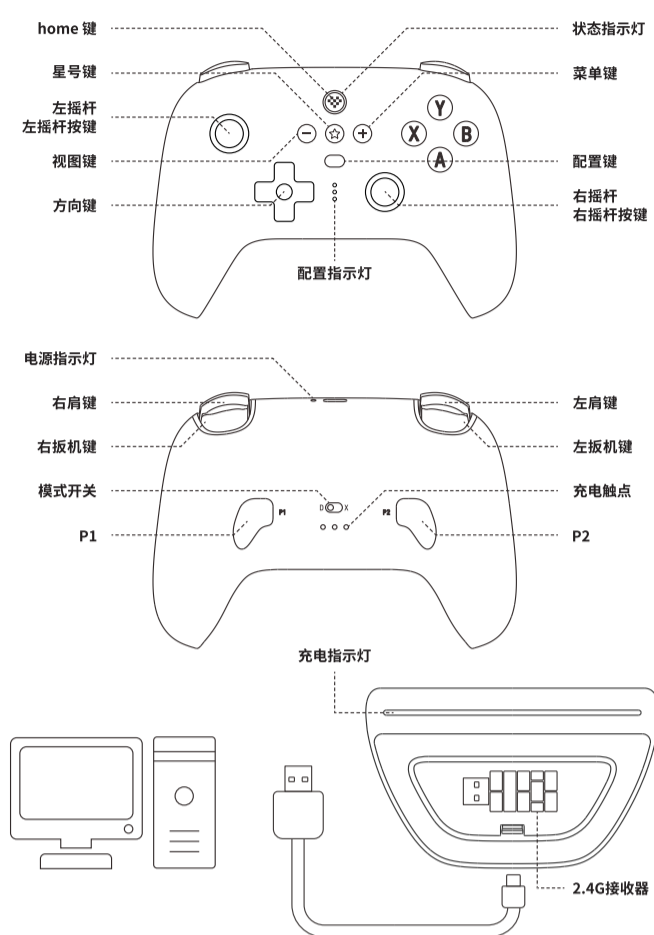

- * 开机:按下 **home 键**。
- * 关机:按住 **home 键** 3 秒。
- * 强制关机:按住 **home 键** 8 秒。

Windows

* required system: Windows 10 (1903) or above.

wireless connection

1. connect the 2.4g receiver to the USB port of your Windows device.
2. turn the **mode switch** to **X**.
3. press **home button** to turn on the controller, wait till the controller is successfully recognized by your Windows device to play.

wired connection

1. turn the **mode switch** to **X**.
2. connect the controller to your Windows device via USB cable, wait till the controller is successfully recognized by your Windows device to play.

Android

- * required system: Android 9.00 or above.
- * OTG support is required on your Android device, please contact your manufacturer for more information.
- * hold the **profile button** for 5 seconds to switch to 2.4g/Bluetooth mode after turn on the controller, the mode will be saved after the mode change.(The controller vibrates once when change to BT mode, twice when change to 2.4g mode)

wireless connection

1. connect the 2.4g receiver to the USB port of your Android device.
2. turn the **mode switch** to **D**.
3. press **home button** to turn on the controller, wait till the controller is successfully recognized by your Android device to play.

Bluetooth connection

1. turn the **mode switch** to **D**.
2. press the **home button** to turn on the controller.
3. hold **star button** for 3 seconds to enter its pairing mode, LED starts to blink rapidly. (This is required for the very first time only)
4. go to your **Android device's Bluetooth setting** and turn it on, pair with [8BitDo Ultimate wireless], LED becomes solid when connection is successful.

wired connection

1. turn the **mode switch** to **D**.
2. connect the controller to the USB port of your Android device, wait till the controller is successfully recognized by your Android device to play.

Apple®

- * required system: iOS 16.3, iPadOS® 16.3, tvOS® 16.3, macOS® 13.2 or above.
- * hold the **profile button** for 5 seconds to switch to the Bluetooth mode, the mode will be saved after the mode change.(The controller vibrates once when change to Bluetooth mode)

Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.

Bluetooth connection

1. turn the **mode switch** to **D**.
2. press **home button** to turn on the controller.
3. hold **star button** for 3 seconds to enter its pairing mode, LED starts to blink rapidly. (this is required for the very first time only)
4. go to your **Apple device's Bluetooth setting** and turn it on, pair with [8BitDo Ultimate wireless], LED becomes solid when connection is successful.

Wired Connection

- * USB wired connection is only available for macOS or iPadOS devices with USB-C ports.
1. turn the **mode switch** to **D**.
 2. connect the controller to the USB port of your Apple device, wait till the controller is successfully recognized by your Apple device to play.

Turbo function

- * status LED blinks continuously when the button with turbo functionality is pressed.
- * D-pad, joysticks, LT, RT, +, -, home are not included.
- * hold the button you would like to set turbo functionality to, then press the **star button** to activate/deactivate its turbo functionality.

Battery

15 hours of play time with a 480mAh built-in battery pack, rechargeable with 2 hours charging time.

controller status –	—————>	LED indicator –
low battery	—————>	red LED blinks
battery charging	—————>	red LED stays solid
battery fully charged	—————>	red LED turns off
charging dock status –	—————>	LED indicator –
battery charging	—————>	white LED stays solid
battery fully charged	—————>	white LED turns off

* charging time with the controller on dock is the same as charging via USB cable.

电源

* 配备 480mAh 可充电式锂电池, 可持续使用约 15 小时, 充电时间约 2 小时。

手柄电源状态 –	—————>	电源指示灯状态 –
电量不足	—————>	红灯闪烁
正在充电	—————>	红灯常亮
充电完成	—————>	红灯熄灭
底座电源状态 –	—————>	充电指示灯状态 –
正在充电	—————>	白灯常亮
充电完成	—————>	白灯熄灭

* 手柄置于底座的充电时长与 USB 充电一致。

Ultimate Software

- * press **profile button** to switch between 3 custom profiles. The profile indicator will not light up when using the default setting.
- * it gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination. Please visit support.8bitdo.com for the application.

自定义配置

- * 配置后可按下 **配置键** 切换不同的配置, 默认无配置。
- * 请访问 app.8bitdo.cn 获取精英软件, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、振动强度以及宏等功能进行自定义配置。

Support

* please visit support.8bitdo.com for further information & additional support.



技术支持

* 请访问 support.8bitdo.cn 了解详细信息。

