



Split

Air Conditioning
Technical Data

2MXM-M

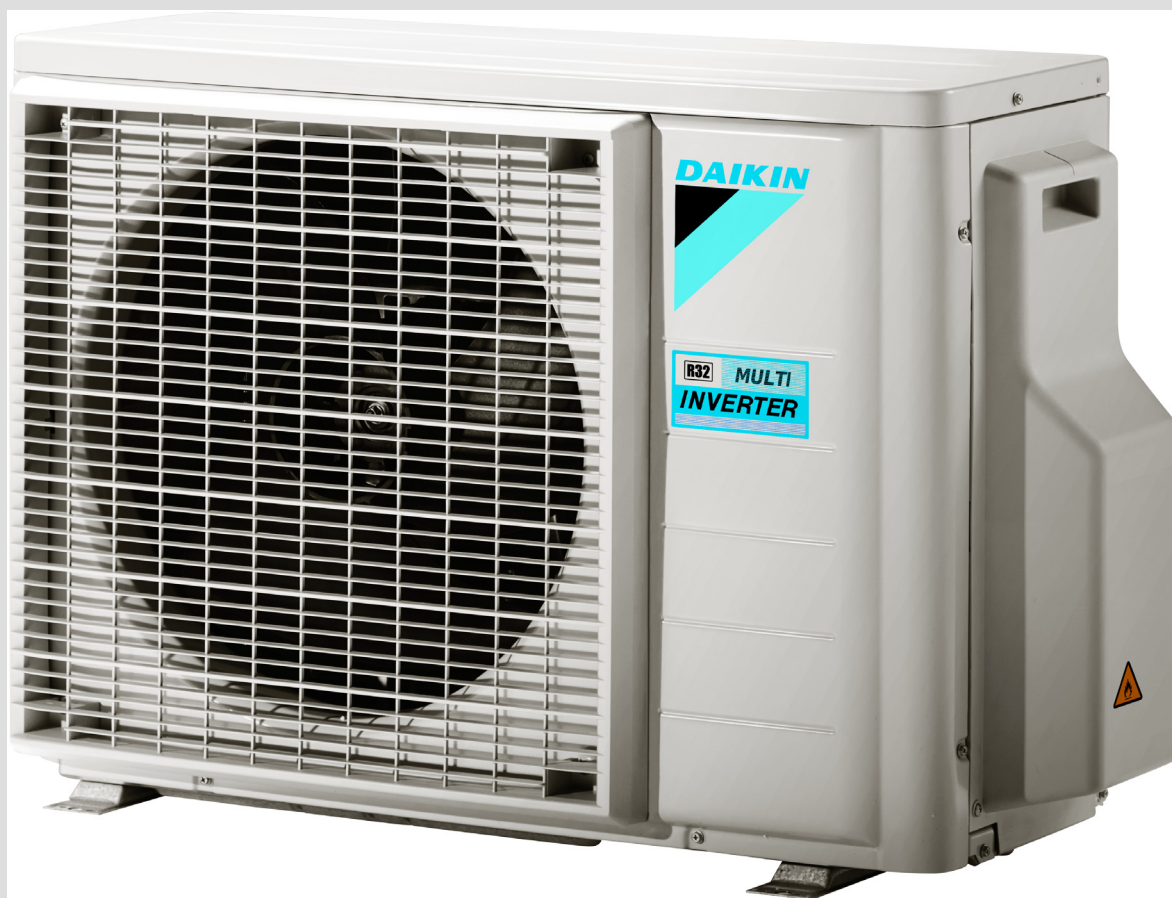



TABLE OF CONTENTS

2MXM-M

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Electrical data	5
4	Combination table	6
5	Capacity tables	8
	Cooling Capacity Tables	8
	Heating Capacity Tables	16
6	Dimensional drawings	24
7	Centre of gravity	25
8	Piping diagrams	26
9	Wiring diagrams	27
	Wiring Diagrams - Single Phase	27
10	Sound data	28
	Sound Pressure Spectrum	28
11	Operation range	29

1 Features

- Seasonal efficiency values up to A+++ in cooling and heating thanks to its up-to-date technology and built-in intelligence.
- Outdoor units for multi model application.
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency
- Up to 5 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. Each unit works individually and independently from the other regarding set
- Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- Seasonal efficiency values up to A+++

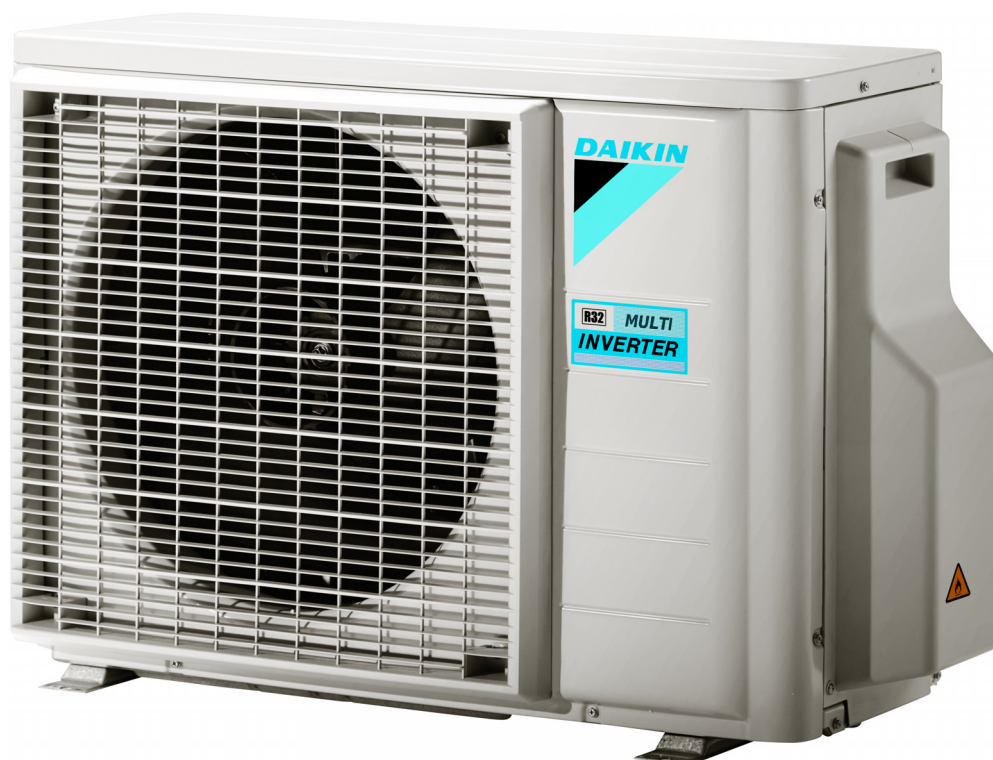

1

2 Specifications

2-1 Technical Specifications					2MXM40M		2MXM50M	
Casing	Colour				Ivory white			
Dimensions	Unit	Height		mm	550			
		Width		mm	765			
		Depth		mm	285			
	Packed unit	Height		mm	614			
		Width		mm	900			
Depth		mm	357					
Weight	Unit		kg	36	41			
	Packed unit		kg	38	43			
Packing	Weight		kg	2				
Heat exchanger	Length		mm	805	810			
	Rows	Quantity		2				
	Fin pitch		mm	1.5				
	Stages	Quantity		24				
	Tube type				7.0 Hi-XD	8.1 Hi-XA		
	Fin	Type		WF fin				
		Treatment		Anti-corrosion treatment				
Compressor	Model		1YC25GXD#C		2YC40JXDC			
	Type		Hermetically sealed swing compressor					
	Output		W	800	1,300			
Fan	Type		Propeller fan					
	Air flow rate	Cooling	High	m ³ /min	36	37		
				cfm	1,271	1,306		
			Nom.	m ³ /min	33	34		
		Super low	High	m ³ /min	30	34		
				cfm	1,059	1,200		
			Heating	High	m ³ /min	32	34	
	cfm				1,130	1,200		
	Super low	Heating	Nom.	m ³ /min	32	34		
				cfm	1,130	1,200		
		Super low	Heating	Super low	m ³ /min	32	34	
cfm	1,130				1,200			
Fan motor	Model		D50M-28					
	Output		W	50				
	Speed	Cooling	High	rpm	900	950		
				rpm	840	890		
			Super low	rpm	760	890		
		Heating	High	rpm	820	890		
				rpm	820	890		
Super low			rpm	820	890			
Sound power level	Cooling		dBA	60				
	Heating		dBA	62				
Sound pressure level	Cooling	Nom.	dBA	48	46			
	Heating	Nom.	dBA	50	48			
Operation range	Cooling	Ambient	Min.	°CDB	-10			
			Max.	°CDB	46			
	Heating	Ambient	Min.	°CWB	-15			
			Max.	°CWB	18			
Refrigerant	Type		R-32					
	Charge	kg		0.88	1.15			
		TCO ₂ eq		0.6	0.8			
	GWP		675					

2 Specifications

2

2-1 Technical Specifications				2MXM40M	2MXM50M	
Piping connections	Liquid	Quantity		2		
		OD	mm	6,35		
	Gas	Quantity		2	1	
		OD	mm	9.5		
	Drain	ID	mm	-		
		OD	mm	16		
	Gas 2	Quantity		-	1	
		OD	mm	-	12.7	
	Piping length	OU - IU	Max.	m	20	
		System	Chargeless	m	20	
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 20m)	
	Level difference	IU - OU	Max.	m	15	
IU - IU		Max.	m	7.5		
Heat insulation			Both liquid and gas pipes			
Total piping length	System	Actual	m	30		
Refrigerant oil	Type			FW68DA		
	Charged volume			l	0.375	0.65

Standard Accessories : Installation manual;

Standard Accessories : Screw bag;

Standard Accessories : Drain plug;

Standard Accessories : Reducer assembly; Quantity : 1;

2-2 Electrical Specifications				2MXM40M	2MXM50M
Power supply	Name			V1	
	Phase			1~	
	Frequency		Hz	50	
	Voltage		V	220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	
Current	Nominal running current (RLA)	Cooling	A	5.34	6.86
		Heating	A	5.4	7.55
	Starting current	Cooling	A	4.6	6.3
		Heating	A	4.6	6.3
Current - 60Hz	Maximum fuse amps (MFA)		A	-	

Notes

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

2MXM40M

MODEL		UNITS				POWER SUPPLY		COMP.		OFM	
OUTDOOR	H/P C/O	HZ	VOLTS	MIN.	MAX.	MCA	MFA	MSC	RLA	W	FLA
2MXM40M2V1B 2AMXM40M2V1B	H/P	50	220	198	242	11.5	16	5.8	5.59	40	0.17
			230	207	253			5.8	5.34		
			240	216	264			5.8	5.12		

NOTES:

1. RLA IS BASED ON THE FOLLOWING CONDITIONS.
COOLING
INDOOR TEMP. 27° C DB/19.0° C WB
OUTDOOR TEMP. 35° C DB
2. VOLTAGE RANGE
UNITS ARE SUITABLE FOR USE ON ELECTRICAL SYSTEMS WHERE VOLTAGE SUPPLIED TO UNIT TERMINAL IS NOT BELOW OR ABOVE LISTED RANGE LIMITS.
3. MAXIMUM ALLOWABLE VOLTAGE VARIATION BETWEEN PHASES IS 2%.
4. MCA REPRESENTS MAXIMUM INPUT CURRENT. MFA REPRESENTS CAPACITY WHICH MAY ACCEPT MCA.
5. SELECT WIRE SIZE BASED ON THE VALUE OF MCA.
6. MFA IS USED TO SELECT THE CIRCUIT BREAKER AND THE GROUND FAULT CIRCUIT INTERRUPTER (EARTH LEAKAGE CIRCUIT BREAKER).

SYMBOLS:

MCA : MAX. CIRCUIT AMPS. (A)
MFA : MAX. FUSE AMPS (SEE NOTE 6). (A)
MSC : MAX. CURRENT DURING THE STARTING COMPRESSOR. (A)
RLA : RATED LOAD AMPS. (A)
OFM : OUTDOOR FAN MOTOR. (A)
FLA : FULL LOAD AMPS. (A)
W : FAN MOTOR RATED OUTPUT. (W)

3D101350

2MXM50M

MODEL		UNITS				POWER SUPPLY		COMP.		OFM	
OUTDOOR	H/P C/O	HZ	VOLTS	MIN.	MAX.	MCA	MFA	MSC	RLA	W	FLA
2MXM50M2V1B 2AMXM50M2V1B	H/P	50	220	198	242	11.5	16	6.6	6.37	42	0.18
			230	207	253			6.6	6.09		
			240	216	264			6.6	5.84		

NOTES:

1. RLA IS BASED ON THE FOLLOWING CONDITIONS.
COOLING
INDOOR TEMP. 27° C DB/19.0° C WB
OUTDOOR TEMP. 35° C DB
2. VOLTAGE RANGE
UNITS ARE SUITABLE FOR USE ON ELECTRICAL SYSTEMS WHERE VOLTAGE SUPPLIED TO UNIT TERMINAL IS NOT BELOW OR ABOVE LISTED RANGE LIMITS.
3. MAXIMUM ALLOWABLE VOLTAGE VARIATION BETWEEN PHASES IS 2%.
4. MCA REPRESENTS MAXIMUM INPUT CURRENT. MFA REPRESENTS CAPACITY WHICH MAY ACCEPT MCA.
5. SELECT WIRE SIZE BASED ON THE VALUE OF MCA.
6. MFA IS USED TO SELECT THE CIRCUIT BREAKER AND THE GROUND FAULT CIRCUIT INTERRUPTER (EARTH LEAKAGE CIRCUIT BREAKER).

SYMBOLS:

MCA : MAX. CIRCUIT AMPS. (A)
MFA : MAX. FUSE AMPS (SEE NOTE 6). (A)
MSC : MAX. CURRENT DURING THE STARTING COMPRESSOR. (A)
RLA : RATED LOAD AMPS. (A)
OFM : OUTDOOR FAN MOTOR. (A)
FLA : FULL LOAD AMPS. (A)
W : FAN MOTOR RATED OUTPUT. (W)

3D101347

4 Combination table

4 - 1 Combination Table

4

2MXM40M

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]	EER	ENERGY LABEL	AEC (kWh)	Seasonal data			
		Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					label	SEER	Pdesign	AEC
2MXM40M2V1B	1.5	1.50	---	1.30	1.50	2.00	0.33	0.31	0.40	1.78	1.70	2.17	79	---	---	---	---	---	---	
	2.0	2.00	---	1.30	2.00	2.40	0.33	0.44	0.57	1.78	2.38	3.09	79	---	---	---	---	---	---	
	2.5	2.50	---	1.30	2.50	3.00	0.33	0.61	0.80	1.78	3.33	4.40	79	---	---	---	---	---	---	
	3.5	3.50	---	1.30	3.50	4.00	0.33	1.04	1.35	1.78	5.71	7.38	79	---	---	---	---	---	---	
	1.5+1.5	1.50	1.50	1.50	3.00	3.60	0.31	0.60	0.73	1.67	3.33	4.00	79	4.97	A	302	A+++	8.66	3.00	122
	1.5+2.0	1.50	2.00	1.50	3.50	4.00	0.31	0.79	0.91	1.67	4.35	4.98	79	4.43	A	396	A+++	8.60	3.50	143
	1.5+2.5	1.50	2.50	1.50	4.00	4.20	0.31	0.98	1.03	1.67	5.37	5.64	79	4.10	A	488	A+++	8.55	4.00	164
	1.5+3.5	1.20	2.80	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.30	5.83	79	4.16	A	481	A++	8.26	4.00	170
	2.0+2.0	2.00	2.00	1.50	4.00	4.20	0.31	0.97	1.02	1.67	5.34	5.61	79	4.13	A	486	A+++	8.53	4.00	165
	2.0+2.5	1.78	2.22	1.50	4.00	4.30	0.31	0.96	1.04	1.67	5.30	5.70	79	4.16	A	481	A+++	8.50	4.00	165
	2.0+3.5	1.45	2.55	1.50	4.00	4.50	0.31	0.95	1.08	1.67	5.25	5.91	79	4.20	A	477	A++	8.19	4.00	171
	2.5+2.5	2.00	2.00	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.27	5.80	79	4.18	A	479	A++	8.36	4.00	168
	2.5+3.5	1.67	2.33	1.50	4.00	4.60	0.31	0.94	1.09	1.67	5.20	5.98	79	4.24	A	472	A++	8.11	4.00	173

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]	COP	ENERGY LABEL	Seasonal data				
		Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
2MXM40M2V1B	1.5	2.00	---	1.00	2.00	3.30	0.26	0.68	1.04	1.43	3.66	5.69	79	---	---	---	---	---	---	
	2	3.00	---	1.00	3.00	3.70	0.26	0.83	1.24	1.43	4.52	6.78	79	---	---	---	---	---	---	
	2.5	3.40	---	1.00	3.40	4.10	0.26	1.02	1.48	1.43	5.59	8.09	79	---	---	---	---	---	---	
	3.5	3.80	---	1.00	3.80	4.40	0.26	1.28	1.71	1.43	7.02	9.40	79	---	---	---	---	---	---	
	1.5+1.5	1.75	1.75	1.20	3.50	4.30	0.24	0.80	0.99	1.31	4.43	5.45	79	4.4	A	A++	4.62	3.00	908	0.50
	1.5+2.0	1.63	2.17	1.20	3.80	4.50	0.24	0.88	1.04	1.31	4.85	5.75	79	4.3	A	A++	4.61	3.20	972	0.70
	1.5+2.5	1.58	2.63	1.20	4.20	4.60	0.24	1.00	1.10	1.31	5.53	6.06	79	4.2	A	A++	4.60	3.20	972	0.60
	1.5+3.5	1.26	2.94	1.20	4.20	4.70	0.24	0.96	1.08	1.31	5.29	5.92	79	4.4	A	A++	4.63	3.20	968	0.50
	2.0+2.0	2.10	2.10	1.30	4.20	4.60	0.24	0.98	1.08	1.31	5.41	5.93	79	4.3	A	A++	4.64	3.20	966	0.60
	2.0+2.5	1.87	2.33	1.30	4.20	4.70	0.24	0.97	1.09	1.31	5.36	6.00	79	4.3	A	A++	4.60	3.20	973	0.50
	2.0+3.5	1.53	2.67	1.30	4.20	4.80	0.24	0.95	1.09	1.31	5.25	6.00	79	4.4	A	A++	4.60	3.20	974	0.40
	2.5+2.5	2.10	2.10	1.30	4.20	4.70	0.24	0.96	1.08	1.31	5.29	5.92	79	4.4	A	A++	4.60	3.20	974	0.50
	2.5+3.5	1.75	2.45	1.30	4.20	4.80	0.24	0.94	1.08	1.31	5.19	5.94	79	4.5	A	A++	4.61	3.20	971	0.40

Notes

- The total capacity of each connected indoor unit is up to 6.0kW.
- The values above are for connecting with the following indoor unit types:
1.5, 2.0, 2.5, 3.5 kW class
Wall-mounted CTXM-M,FTXM-M series
- These indoor units can only be used in a multi-unit setup.
- Heating capacity conditions
Indoor temperature 20°C DB
Outdoor temperature 7°C DB / 6°C WB
- Cooling capacity conditions
Indoor temperature 27°C DB / 19°C WB
Outdoor temperature 35°C DB

3D102222

6

4 Combination table

4 - 1 Combination Table

2MXM50M

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]	EER	ENERGY LABEL	AEC (kWh)	Seasonal data			
		Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					label	SEER	Pdesign	AEC
		1.5	1.50	---	1.4	1.50	2.20	0.31	0.32	0.52	1.53	1.55					2.53	89.00	---	---

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]	COP	ENERGY LABEL	label	SCOP	Pdesign	AEC	Back-up heater capacity at +10°C
		Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.								
		1.5	1.50	---	1.10	2.00	3.30	0.29	0.68	0.95	1.44	3.31								

- Notes
- The total capacity of each connected indoor unit is up to 8.5kW.
 - The values above are for connecting with the following indoor unit types:
1.5,2.0,2.5,3.5,4.2,5.0 kW class
Wall-mounted CTXM-M,FTXM-M series
 - These indoor units can only be used in a multi-unit setup.
 - Heating capacity conditions
Indoor temperature 20°C DB
Outdoor temperature 7°C DB / 6°C WB
 - Cooling capacity conditions
Indoor temperature 27°C DB / 19°C WB
Outdoor temperature 35°C DB

3D102231

5 Capacity tables

5 - 1 Cooling Capacity Tables

2MXM40M

Cooling 50Hz 230V

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.5 + 3.5	10,0	5,14	0,72	5,35	0,74	5,58	0,76	5,67	0,77	5,99	0,81	6,20	0,83
	12,0	5,06	0,74	5,27	0,76	5,48	0,78	5,59	0,79	5,90	0,83	6,12	0,85
	15,0	4,93	0,77	5,14	0,80	5,35	0,82	5,46	0,83	5,77	0,86	5,99	0,88
	18,0	4,80	0,81	5,01	0,83	5,22	0,85	5,33	0,86	5,65	0,89	5,86	0,91
	20,0	4,71	0,83	4,92	0,85	5,14	0,87	5,24	0,88	5,56	0,92	5,77	0,94
	22,0	4,63	0,86	4,84	0,88	5,05	0,90	5,16	0,91	5,47	0,94	5,69	0,96
	25,0	4,50	0,90	4,71	0,92	4,92	0,94	5,03	0,95	5,35	0,98	5,56	1,00
	28,0	4,37	0,94	4,58	0,96	4,79	0,98	4,90	0,99	5,22	1,02	5,43	1,04
	32,0	4,20	0,99	4,41	1,01	4,62	1,04	4,73	1,05	5,05	1,08	5,26	1,10
	35,0	4,07	1,04	4,28	1,06	4,49	1,08	4,60	1,09	4,92	1,12	5,13	1,14
	40,0	3,86	1,12	4,07	1,14	4,28	1,16	4,39	1,17	4,70	1,20	4,92	1,22
	43,0	3,73	1,17	3,94	1,19	4,15	1,21	4,26	1,22	4,58	1,25	4,79	1,28
	46,0	3,57	1,19	3,73	1,22	3,97	1,24	4,15	1,26	4,47	1,29	4,61	1,32

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5 m
Level difference: 0m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:

2.0,3,5 kW class

Wall-mounted FTXM-M series

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

① Indoor unit combinations

② Outdoor air temperature
[°C DB]

3D102417

5 Capacity tables

5 - 1 Cooling Capacity Tables

2MXM50M

Cooling 50Hz 230V

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
4.2 + 4.2	10,0	6,15	1,00	6,40	1,01	6,65	1,04	6,78	1,05	7,16	1,08	7,41	1,12
	12,0	6,04	1,01	6,30	1,04	6,55	1,06	6,68	1,07	7,06	1,10	7,31	1,12
	15,0	5,89	1,05	6,14	1,07	6,40	1,09	6,52	1,10	6,90	1,13	7,16	1,16
	18,0	5,74	1,08	5,99	1,11	6,24	1,12	6,37	1,14	6,75	1,18	7,00	1,19
	20,0	5,63	1,11	5,89	1,13	6,14	1,15	6,27	1,17	6,65	1,19	6,90	1,22
	22,0	5,53	1,13	5,79	1,16	6,04	1,18	6,17	1,19	6,55	1,23	6,80	1,24
	25,0	5,38	1,18	5,63	1,20	5,89	1,22	6,01	1,23	6,39	1,26	6,65	1,29
	28,0	5,23	1,22	5,48	1,24	5,73	1,26	5,86	1,27	6,24	1,30	6,49	1,33
	32,0	5,02	1,28	5,27	1,30	5,53	1,32	5,65	1,34	6,03	1,36	6,29	1,39
	35,0	4,87	1,33	5,12	1,35	5,37	1,37	5,50	1,38	5,88	1,41	6,13	1,44
	40,0	4,61	1,41	4,86	1,43	5,12	1,46	5,24	1,47	5,62	1,50	5,88	1,52
	43,0	4,46	1,47	4,71	1,49	4,96	1,51	5,09	1,52	5,47	1,55	5,72	1,58
	46,0	4,30	1,52	4,56	1,54	4,81	1,57	4,94	1,58	5,32	1,61	5,57	1,63

Notes

- The capacities are based on the following conditions:
 Corresponding refrigerant piping length: 5 m
 Level difference: 0m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
 4.2 kW class
 Wall-mounted FTXM-M series

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

① Indoor unit combinations

② Outdoor air temperature [°C DB]

3D102590

5 Capacity tables

5 - 2 Heating Capacity Tables

5

2MXM40M

Heating 50Hz 230V

①	②	Indoor air temperature [°C DB]											
		16°C		18°C		20°C		21°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.5 + 3.5	-10,0	3,28	0,91	3,22	0,92	3,15	0,93	3,12	0,94	3,09	0,94	3,02	0,95
	-7,0	3,60	0,94	3,54	0,95	3,47	0,96	3,44	0,97	3,41	0,97	3,34	0,98
	-5,0	3,81	0,96	3,75	0,97	3,68	0,98	3,65	0,98	3,62	0,99	3,55	1,00
	-2,0	4,13	0,97	4,07	1,00	4,00	1,01	3,97	1,01	3,94	1,02	3,87	1,03
	0,0	4,34	0,99	4,28	1,01	4,21	1,03	4,18	1,03	4,15	1,04	4,08	1,05
	1,0	4,45	1,01	4,38	1,02	4,32	1,03	4,29	1,04	4,25	1,04	4,19	1,05
	3,0	4,66	1,03	4,60	1,04	4,53	1,05	4,50	1,06	4,47	1,06	4,40	1,07
	6,0	4,98	1,06	4,91	1,07	4,80	1,08	4,82	1,09	4,79	1,09	4,72	1,10
	8,0	5,19	1,08	5,13	1,09	5,06	1,10	5,03	1,10	5,00	1,11	4,93	1,12
	10,0	5,40	1,10	5,34	1,11	5,27	1,12	5,24	1,12	5,21	1,13	5,14	1,14
	12,0	5,62	1,11	5,55	1,12	5,49	1,13	5,45	1,14	5,42	1,14	5,36	1,15
	15,0	6,09	1,12	5,87	1,15	5,81	1,16	5,77	1,17	5,74	1,17	5,68	1,18
	18,0	5,67	1,03	5,58	1,03	5,48	1,03	5,44	1,03	5,39	1,03	5,30	1,03

Notes

1. The capacities are based on the following conditions:

Corresponding refrigerant piping length: 5 m

Level difference: 0m

2. The bold cells indicate the standard conditions.

3. The values above are for connecting with the following indoor unit types:

2.5,3.5 kW class

Wall-mounted FTXM-M series

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

① Indoor unit combinations

② Outdoor air temperature
[°C WB]

3D102419

5 Capacity tables

5 - 2 Heating Capacity Tables

2MXM50M

Heating 50Hz 230V

①	②	Indoor air temperature [°C DB]											
		16°C		18°C		20°C		21°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
4.2 + 4.2	-10,0	3,58	1,30	3,49	1,31	3,41	1,33	3,36	1,33	3,32	1,34	3,24	1,35
	-7,0	4,13	1,35	4,04	1,36	3,96	1,38	3,92	1,38	3,87	1,39	3,79	1,40
	-5,0	4,54	1,39	4,46	1,40	4,37	1,41	4,33	1,42	4,29	1,42	4,20	1,44
	-2,0	4,82	1,41	4,73	1,42	4,65	1,44	4,60	1,44	4,56	1,45	4,48	1,46
	0,0	5,50	1,47	5,42	1,48	5,34	1,50	5,29	1,50	5,25	1,51	5,17	1,52
	1,0	5,78	1,49	5,70	1,51	5,61	1,52	5,57	1,53	5,53	1,53	5,44	1,55
	3,0	6,06	1,52	5,97	1,53	5,89	1,54	5,84	1,55	5,80	1,56	5,72	1,57
	6,0	6,47	1,55	6,38	1,57	6,30	1,58	6,26	1,59	6,22	1,59	6,13	1,61
	8,0	6,74	1,58	6,66	1,59	6,58	1,60	6,58	1,61	6,49	1,62	6,41	1,63
	10,0	7,02	1,60	6,94	1,61	6,85	1,63	6,81	1,63	6,77	1,64	6,68	1,65
	12,0	7,30	1,63	7,21	1,64	7,13	1,65	7,08	1,66	7,04	1,67	6,96	1,68
	15,0	7,71	1,66	7,62	1,68	7,54	1,69	7,50	1,69	7,46	1,70	7,37	1,71
	18,0	8,12	1,70	8,04	1,71	7,95	1,72	7,91	1,73	7,87	1,74	7,78	1,75

Notes

1. The capacities are based on the following conditions:

Corresponding refrigerant piping length: 5 m

Level difference: 0m

2. The bold cells indicate the standard conditions.

3. The values above are for connecting with the following indoor unit types:

4.2 kW class

Wall-mounted FTXM-M series

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

① Indoor unit combinations

② Outdoor air temperature
[°C WB]


3D102513

6 Dimensional drawings

6 - 1 Dimensional Drawings


6

2MXM40M

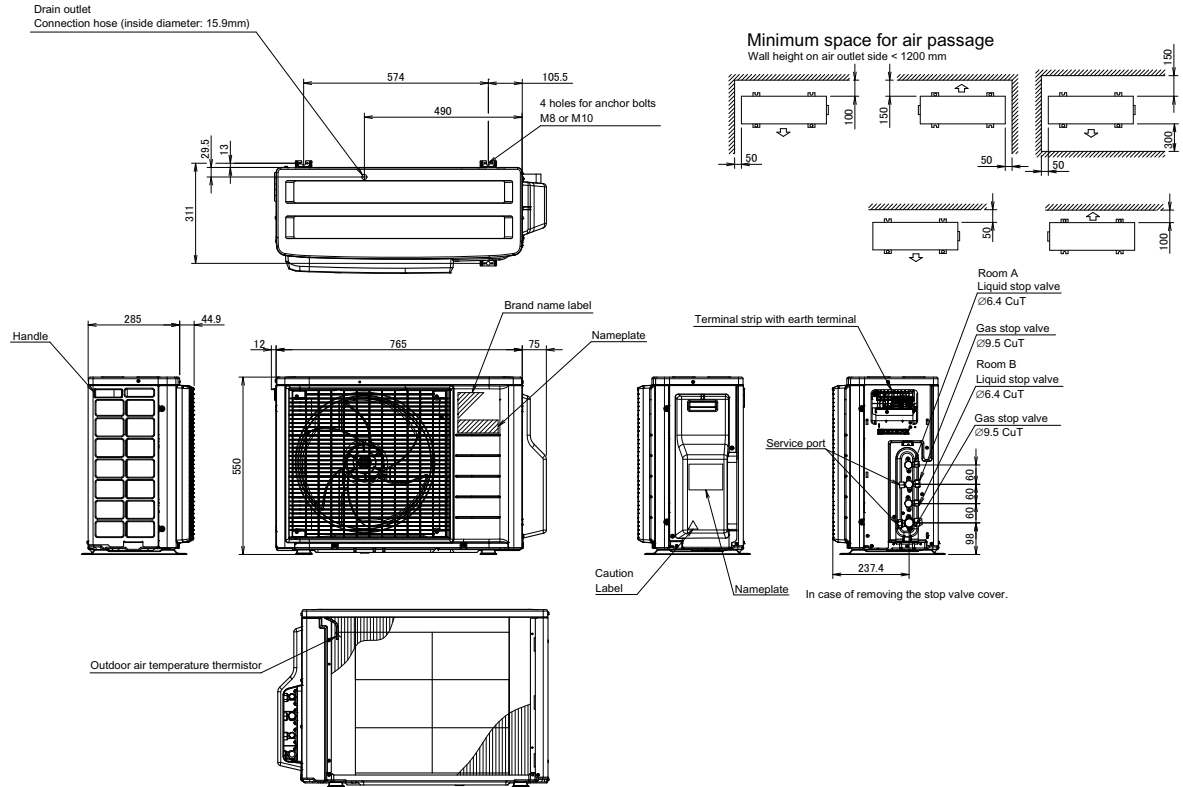

3D101252

2MXM50M

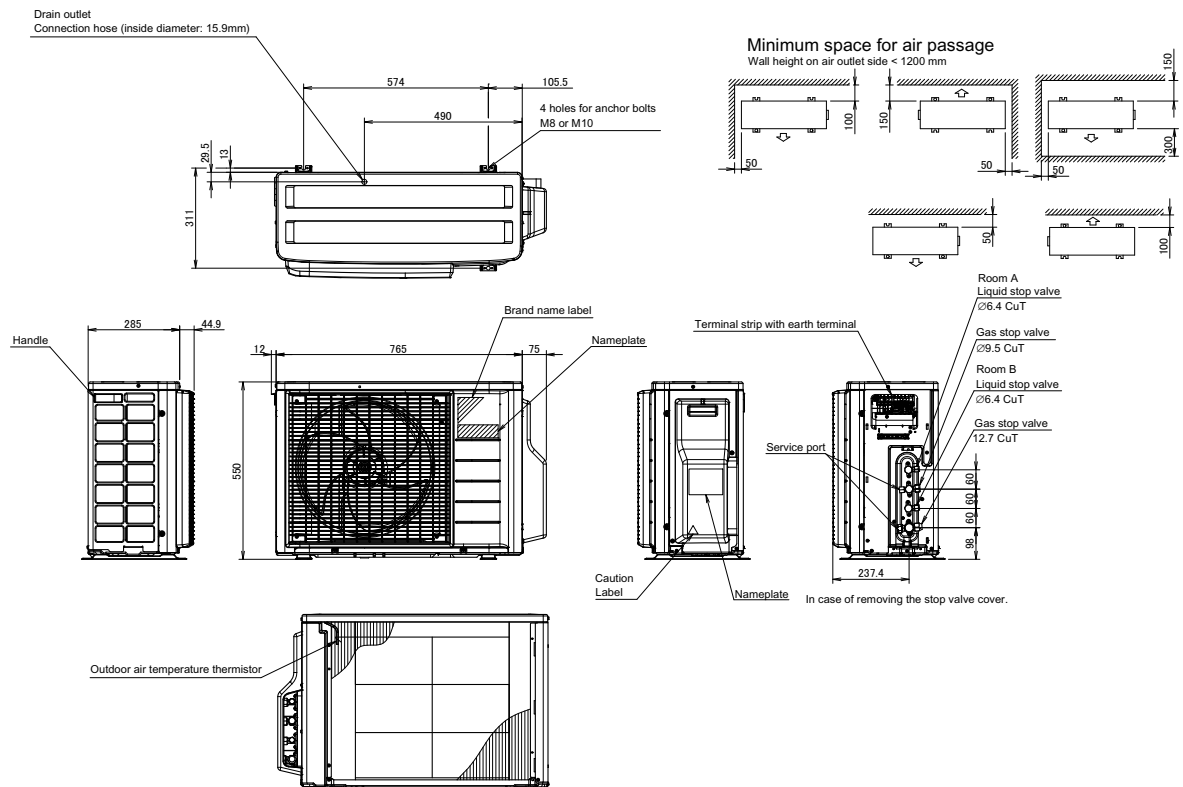


3D101375

7 Centre of gravity

7 - 1 Centre of Gravity

2MXM-M

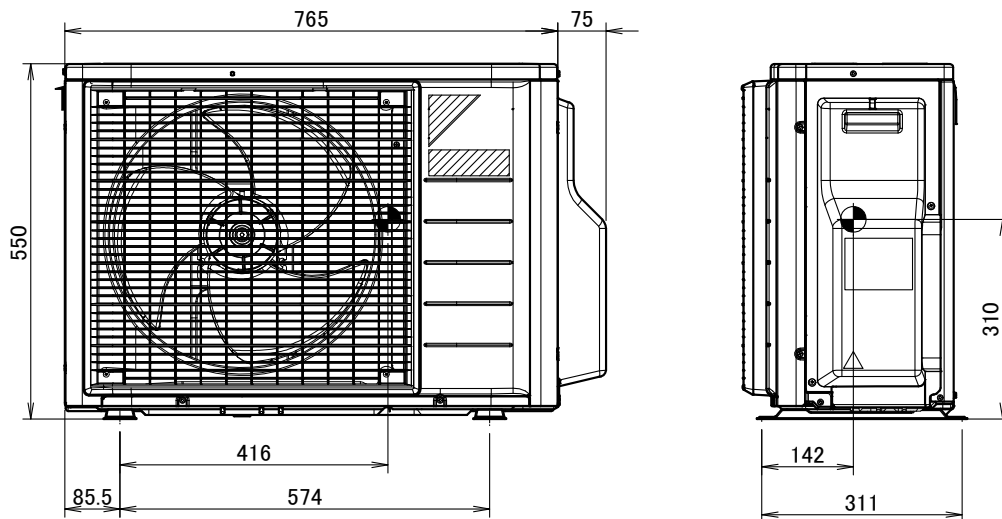


4D101315

8 Piping diagrams


8 - 1 Piping Diagrams

8

2MXM40M

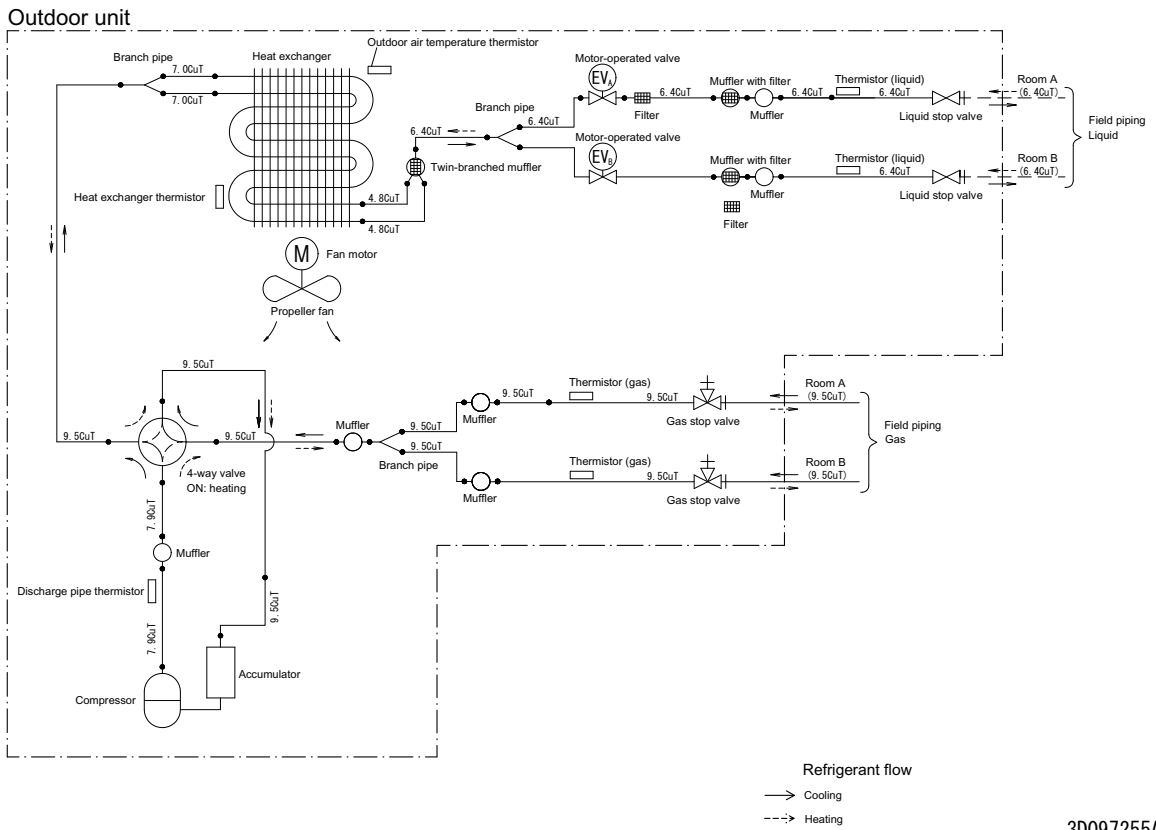


2MXM50M

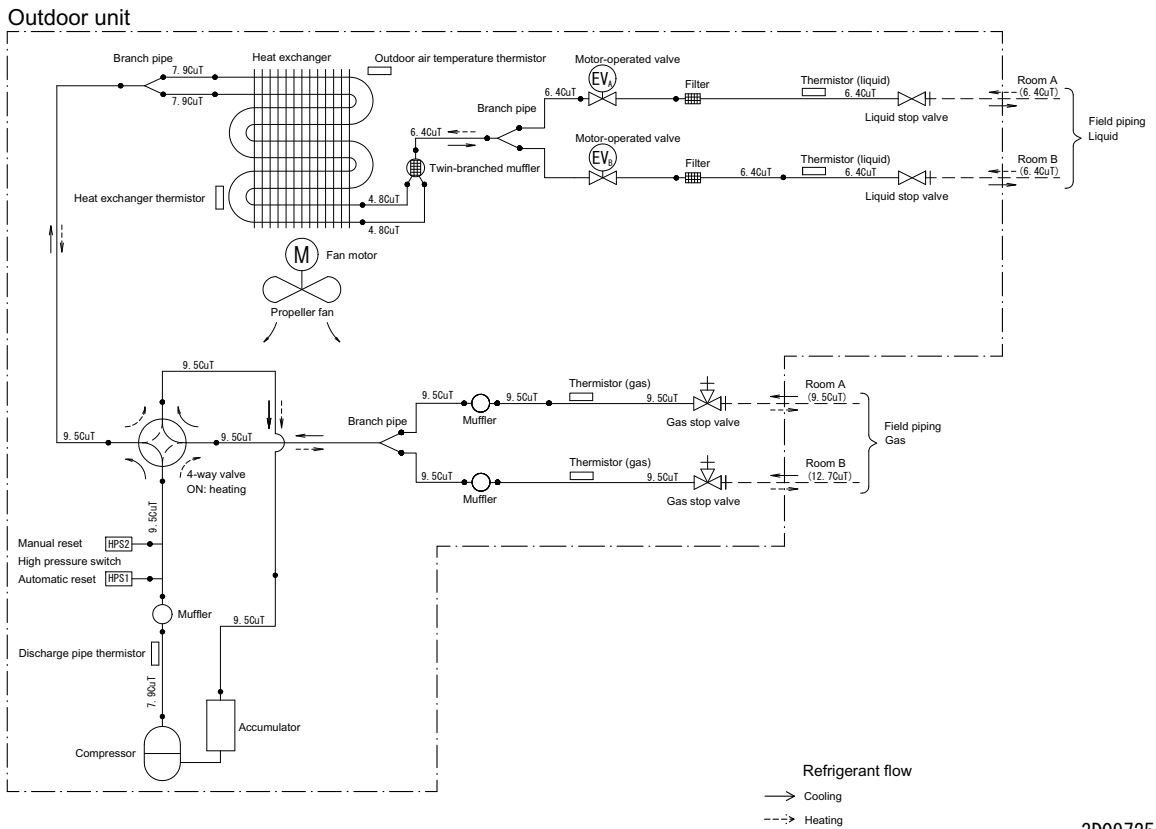


9 Wiring diagrams

9 - 1 Wiring Diagrams - Single Phase

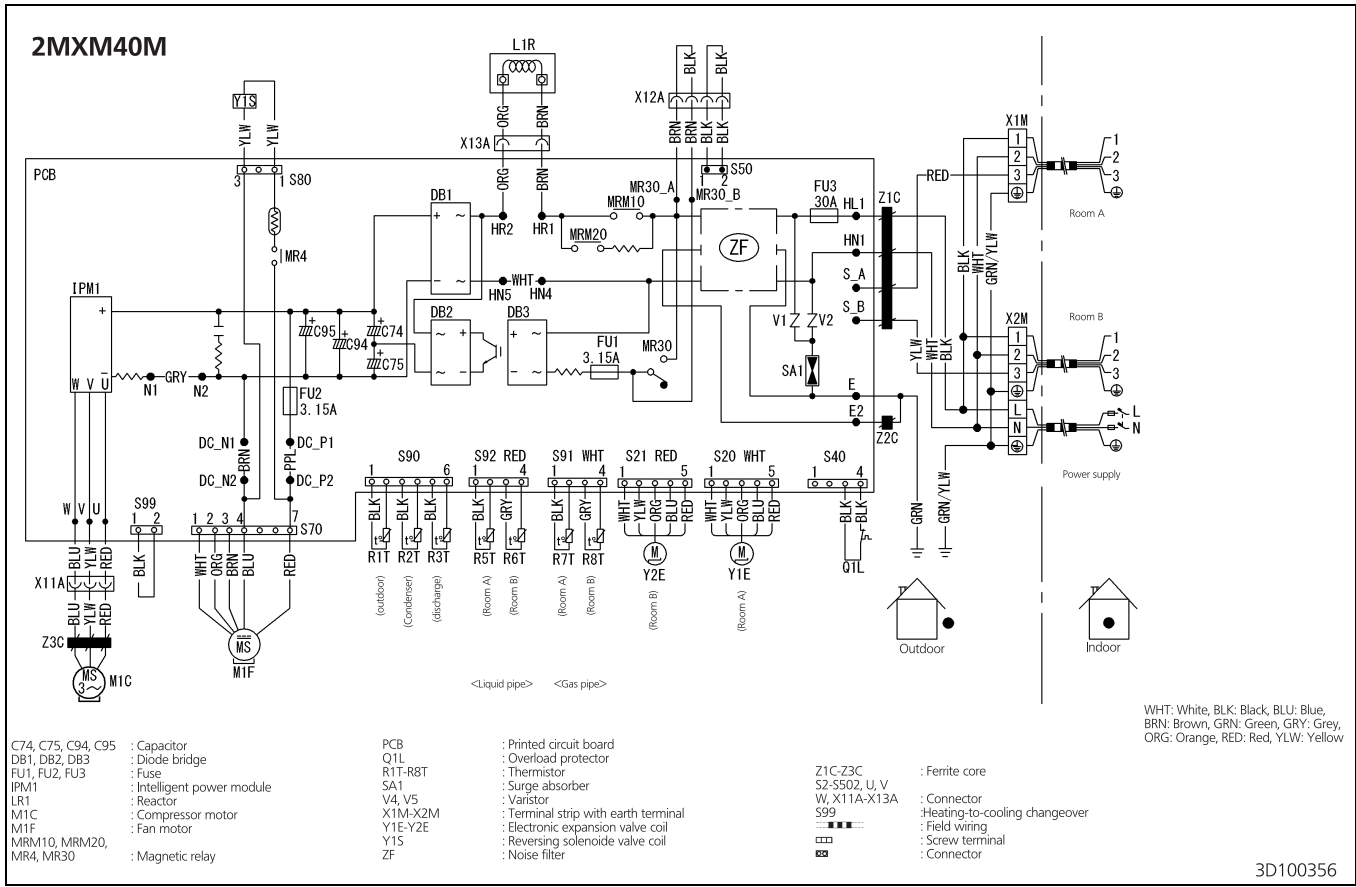

3D100356

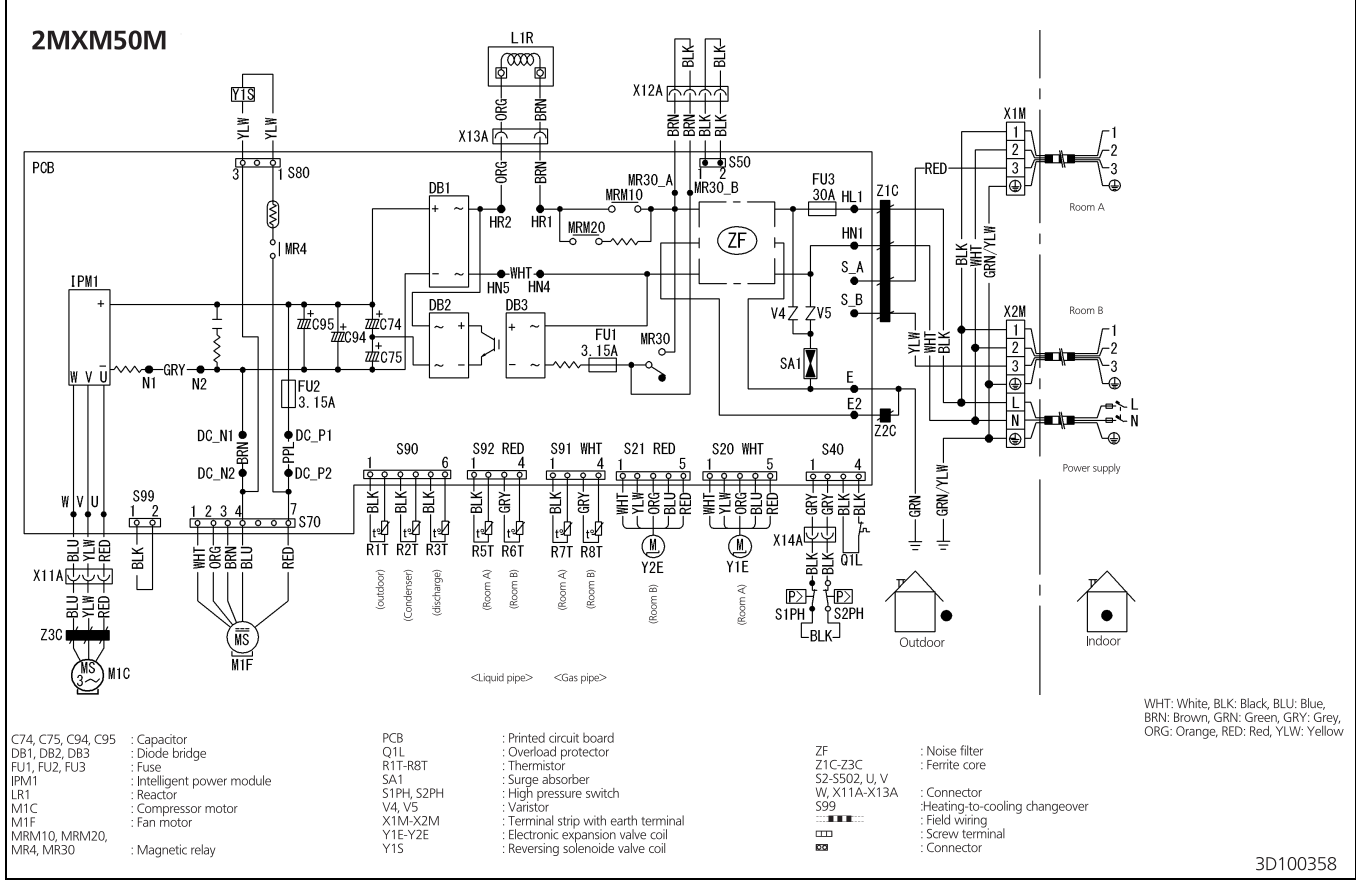



3D100358

10 Sound data

10 - 1 Sound Pressure Spectrum

10

2MXM40M

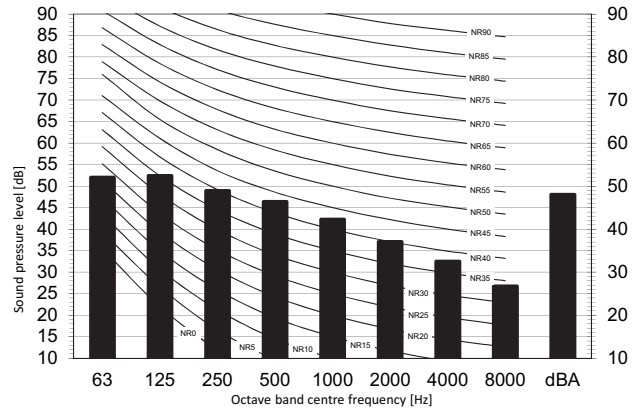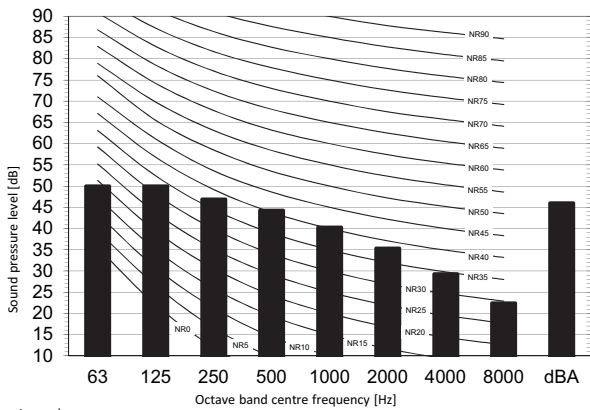


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap

Location of microphone



Cooling Total dB

A	B
dBA	46

Heating Total dB



A	B
dBA	48

Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

3D102207

2MXM50M

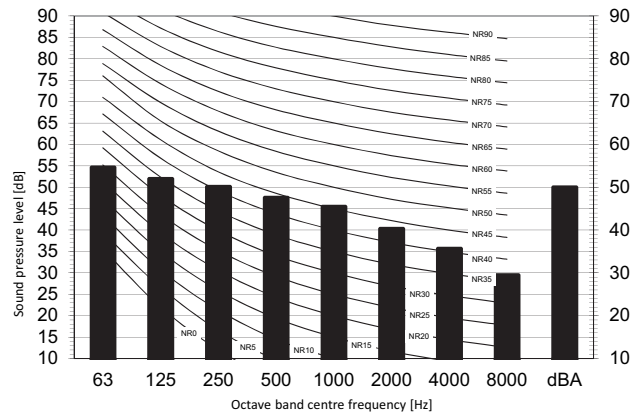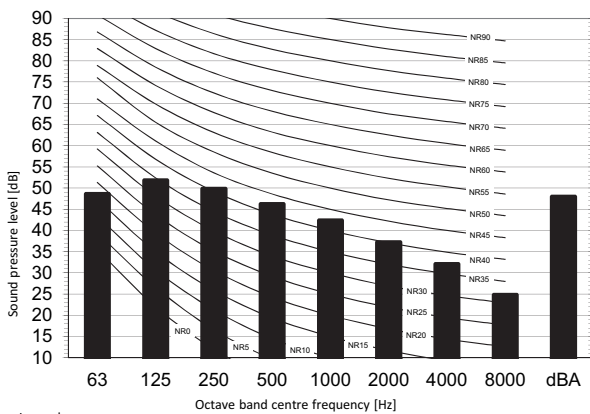


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B High-tap

Location of microphone



Cooling Total dB

A	B
dBA	48

Heating Total dB

A	B
dBA	50

Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber


3D102208

11 Operation range


11 - 1 Operation Range

2MXM-M

Cooling

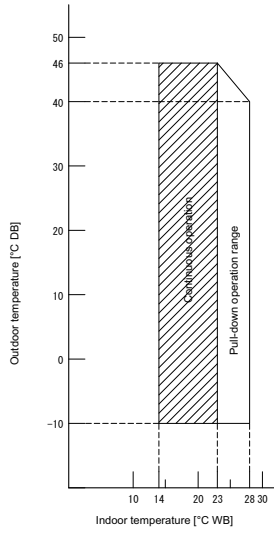

Heating

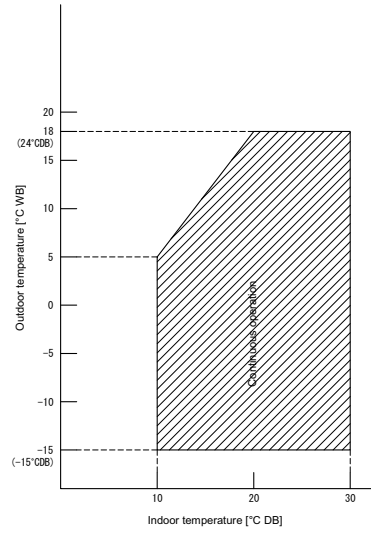


Notes

- The graph is based on the following conditions.
 Corresponding refrigerant piping length: 5 m
 Level difference: 0m
 Air flow rate High

3D101376



Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende



ECDEN16 XXX-07/15



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.