




Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [Brother RJ-3230BL](#) o cerca il tuo prodotto tra le [migliori offerte di Macchine per Ufficio](#)



Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [Brother RJ-3230BL](#) o cerca il tuo prodotto tra le [migliori offerte di Macchine per Ufficio](#)

brother
at your side

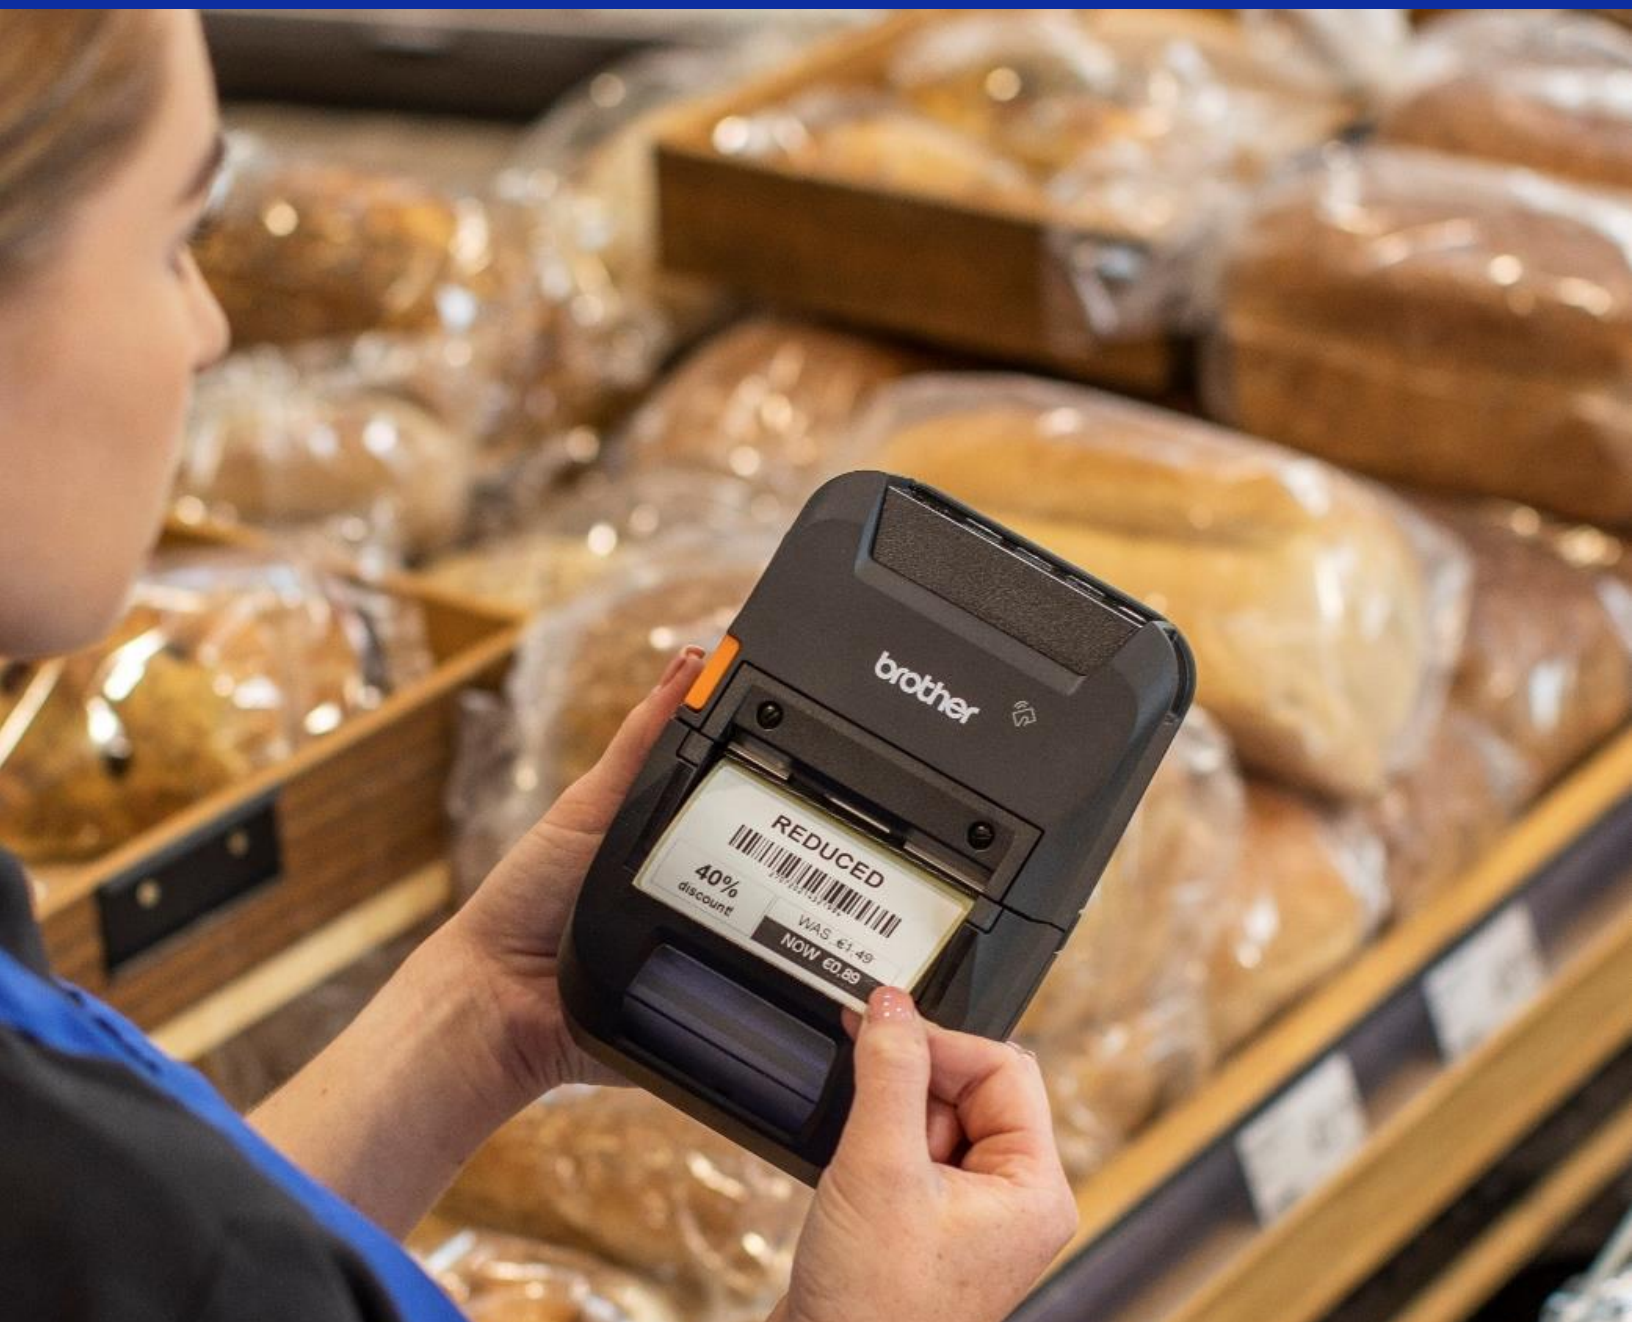

Printers that are “At your side” today, tomorrow and the next day

RJ-3230BL / RJ-3250WBL Data Sheet

Printers designed to endure the rigour of everyday tasks

The RJ-3200 printers offer a fast mobile print solution which is designed to endure relentless usage.

With in-built durability, the compact and rugged mobile printers are ready to support busy workforces' labelling and receipt requirements.

Key Features:

- Compact and rugged design: 2m drop tested and IP54 rating
- Fast printing while you work: Print speeds up to 5ips (127mm/sec)
- Variety of connectivity options: USB-C, NFC, Bluetooth and WiFi*
- Smart Li-ion battery designed to last the full shift
- AirPrint compatibility for printing without printer drivers*



General

Carton contents	Belt Clip Inner spacer Media Roll holder Battery Documentation
Language support	Dansk, Deutsch, English, Español, Français, Italian, Nederlands, Norsk, Português, Suomi, Svenska

Dimensions & Weights

Without carton (with battery)	117mm(w) x 180mm(d) x 77mm(h) 807g
--	---

Built In Features

Printing Method	Direct Thermal
Print Speed	Maximum 5ips (127mm/sec)
Maximum print width	72mm
Minimum print length	6mm (Die-cut media) 12.7mm (Black mark media)
Maximum print length	3000mm
Print Resolution	203dpi
Minimum media width	25.4mm
Maximum media width	80mm
Maximum roll diameter	66mm
Number of labels per battery charge	Approx. 15,000 labels (80mm x 29mm) (^Under Brother standard environment)
Interfaces	USB Ver.2.0 (Full Speed) (Type C) Bluetooth Version.5.0 MFi Wireless LAN IEEE802.11a/b/d/g/i/n/r supporting 2.4GHz and 5GHz – RJ 3250WB NFC (Passive)
Bluetooth Profile	SPP(Serial Port Profile), OPP, HCRP, GATT (Low Energy)/ iAP supported

WLAN Security	Authentic method (encryption scheme) Infrastructure mode: • SSL/TLS1.0/1.1/1.2 (HTTPS, IPPS) • SNMPv3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS) • WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (AES), WPA3-SAE (AES)
----------------------	--

Printer commands	Raster ESC/P P-touch Template ZPL II emulation CPCL emulation (CPCL page print mode / CPCL line print mode)
-------------------------	---

Printer driver	Microsoft® Windows® 7 / 8.1 / 10 Microsoft® Windows Server® 2012 / 2012 R2 / 2016 / 2019
-----------------------	---

Mobile SDK	Android v6 or later iOS v10 or later** **Supports Bluetooth communication from ver. 12.01 or later. Requires 3rd party app development using Brother SDK, further information available at https://support.brother.com/g/es/dev/en/index.html?c=eu
-------------------	---

Software	P-touch Editor – Barcode label design software Brother Print Service Plugin – Driverless printing from Android devices (version 5.0 and above) Mobile Deploy App – remote printer configuration Brother Font Manager – font download tool (Windows® only via USB)^ Printer Settings Tool – device configuration software (Windows® only via USB) BRAdmin Pro 4 – device management (Windows® only)
-----------------	---

Internal fonts & sizes	<ESC/P> Bitmap font: Gothic 3 size<16,24,32dot>, Letter Gothic Bold, Helsinki 4 size<16,24,32,48dot>, Brussels, San Diego, Brougham 3 size<24,32,48dot> Outline font: Gothic, Letter Gothic, Helsinki, Brussel, Max size: 400dot
	<P-touch Template> Outline font: Gothic, Letter Gothic, Helsinki, Brussel, Max: 400dot
	<ZPL II> Bitmap font: Letter. Gothic (A,B,C,D,F,G) 5 size<9, 11, 18, 26, 56dot>, BR-OCRB(E) 1 size<28dot>, BR-OCRA(H) 1 size<21dot>, Special Symbol 1 size<24dot> Outline font: Utah Condensed Bold (0)
	<CPCL> Bitmap font: Standard (0) 1 size<16dot>, Script (1) 1 size<48dot>, OCR-A (2) 2 size<12, 24dot>, Unison (4) 3 size<45, 48, 90dot>, Manhattan (5) 2 size<25, 46dot>, MICR (6) 1 size<27dot>, Warwick (7) 1 size<25dot>
Barcode Symbology	<Common> CODE39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, CODABAR(NW-7), CODE128, GS1-128(UCC/EAN-128), GS1 DataBar (Standard, Truncated, Stacked, Stacked Omnidirectional), GS1 DataBar Limited, GS1 DataBar Expanded(Standard, Stacked), QR Code, PDF417, MaxiCode
	<Additional ESC/P mode> CODE93, POSTNET, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode, Micro QR Code, MicroPDF417, DataMatrix, Aztec
	<Additional P-touchTemplate mode> GS1 Databar Composite, POSTNET, Intelligent Mail Barcode, Micro QR Code, MicroPDF417, DataMatrix, Aztec
	<Additional ZPL II mode> GS1 Databar Composite, CODE93, POSTNET, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode, MicroPDF417, DataMatrix, Aztec
	<Additional CPCL mode> GS1 Databar Composite, CODE93, POSTNET, MSI, Aztec

Environmental

Drop Protection	2m (without IP54 case) (Under Brother standard environment)
Sealing	IP54 without case
Operating Temperature	-20°C to 55°C
Operating Humidity	10% to 90% non-condensing
Charging Temperature	0°C to 40°C
Storage Temperature	-20°C to 60° C

Optional Accessories

Carry	PA-SS-4000 Shoulder strap
Power Options	PA-CR-005 Single Ethernet Cradle*** PA-4CR-003 Quad Ethernet Cradle*** PA-BC-003 Single Battery Charger PA-AD-600A AC Adapter PA-CD-600CG Cigarette lighter plug PA-CD-600WR Permanently wired PA-BEK-001CG Battery eliminator kit (cigarette lighter plug – 12-48V) PA-BEK-001WR Battery eliminator kit (permanently wired – 12-48V)
Battery	Rechargeable Li-ion Smart battery (PA-BT-006):7.2V continuously printing 15,000 labels (*Under Brother standard environment)
Media Handling	PA-LPR-004 Linerless Kit PA-LP-007 Peeler

Supplies

Media roll type	BDL-7J000076-066 Receipt Roll: 76mm x 42m
	BDE-1J044076-066 Die-Cut Labels: 76mm x 44mm, 400 labels

*RJ-3250WBL only

^Connected by USB with new battery and full charge. Printed by Brother specified data (8.5% coverage 80mm x 29mm) at 23° C.

^^Font Licensee permissions are required.

***Requires PA-AD-600A - EU/UK

All specifications are correct at the time of printing and are subject to change without notice. Brother and the brother logo are both trademarks of Brother Industries, Ltd., registered in Japan and certain other countries. Any trade names, logos and product names of other companies appearing are trade names or trademarks of those respective companies.

BIE Product Planning: Last updated 12/08/2021