





Questo manuale d'istruzione è fornito da [trovaprezzi.it](#). Scopri tutte le offerte per [Starlink Kit Satellitare Standard SLK2534212](#) o cerca il tuo prodotto tra le [migliori offerte di Altri dispositivi di rete](#)


STARLINK | STANDARD SPECIFICATIONS

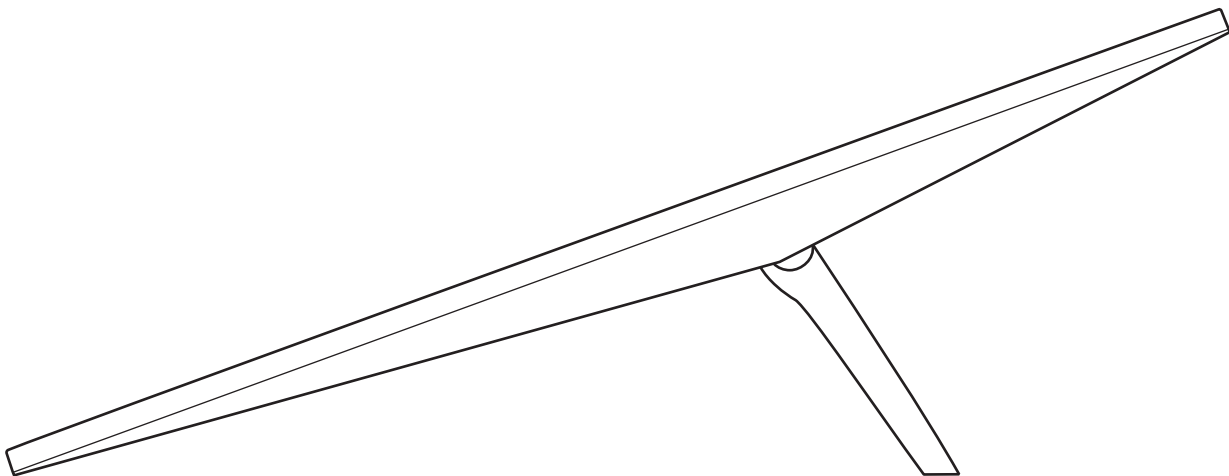


What's In The Box




Standard




Kickstand




Gen 3 Router



Starlink Cable
15 m
(49.2 ft)




AC Power Cable
1.5 m
(4.92 ft)




Power Supply
1.5 m
(4.92 ft)



Package Weight: 6.73 kg (14.83 lbs)


Package Dimensions: 652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)

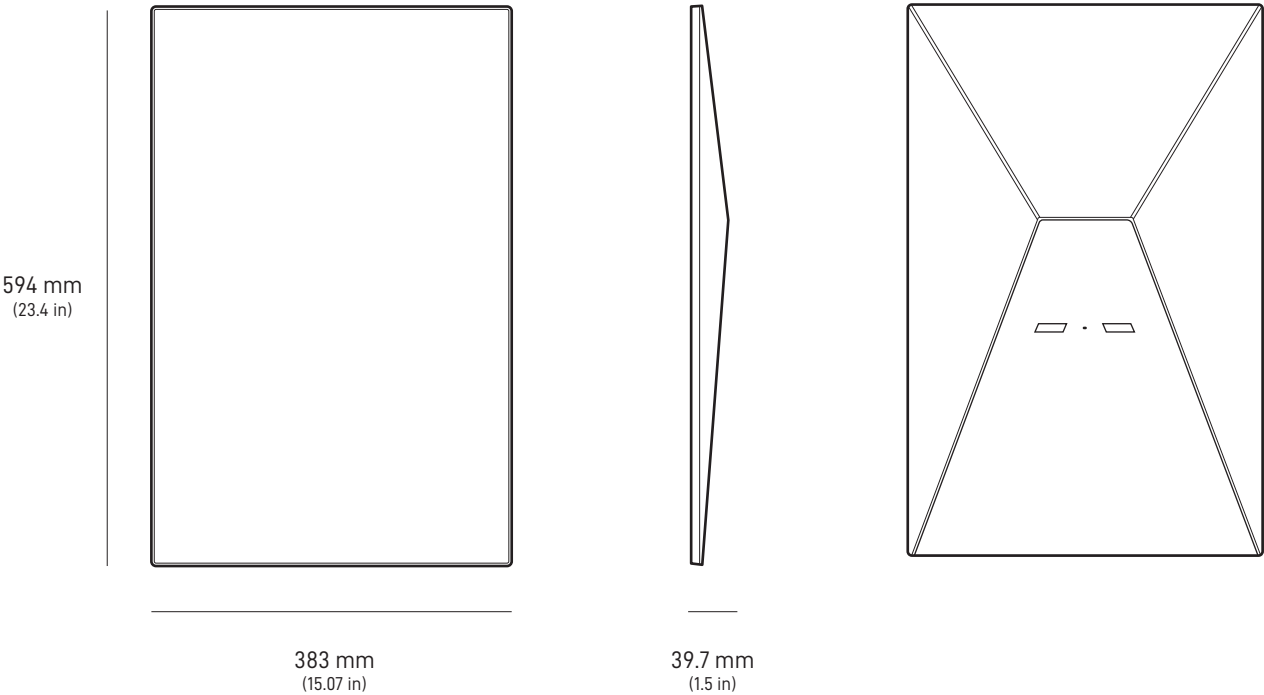


Antenna	Electronic Phased Array
Field of View	110°
Orientation	Software Assisted Manual Orienting
Weight	2.9 kg (6.4 lb) 3.2 kg (7 lb) with Kickstand 3.8 kg (8.3 lb) with Kickstand & 15 m Cable
Environmental Rating	IP67 Type 4
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Wind Speed	Operational: 96 kph+ (60 mph+)
Snow Melt Capability	Up to 40 mm / hour (1.5 in / hour)
Power Consumption	Average: 75 - 100 W

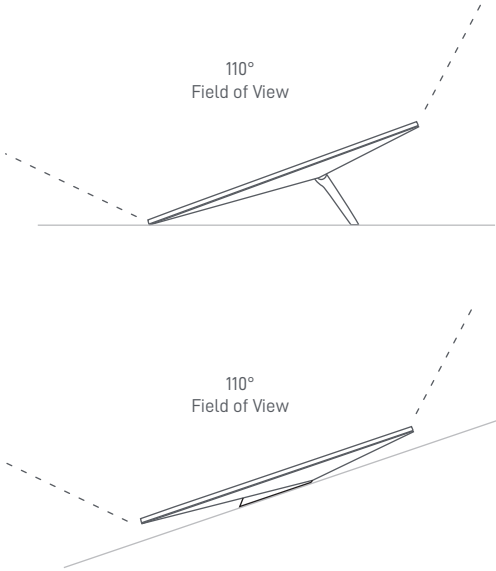

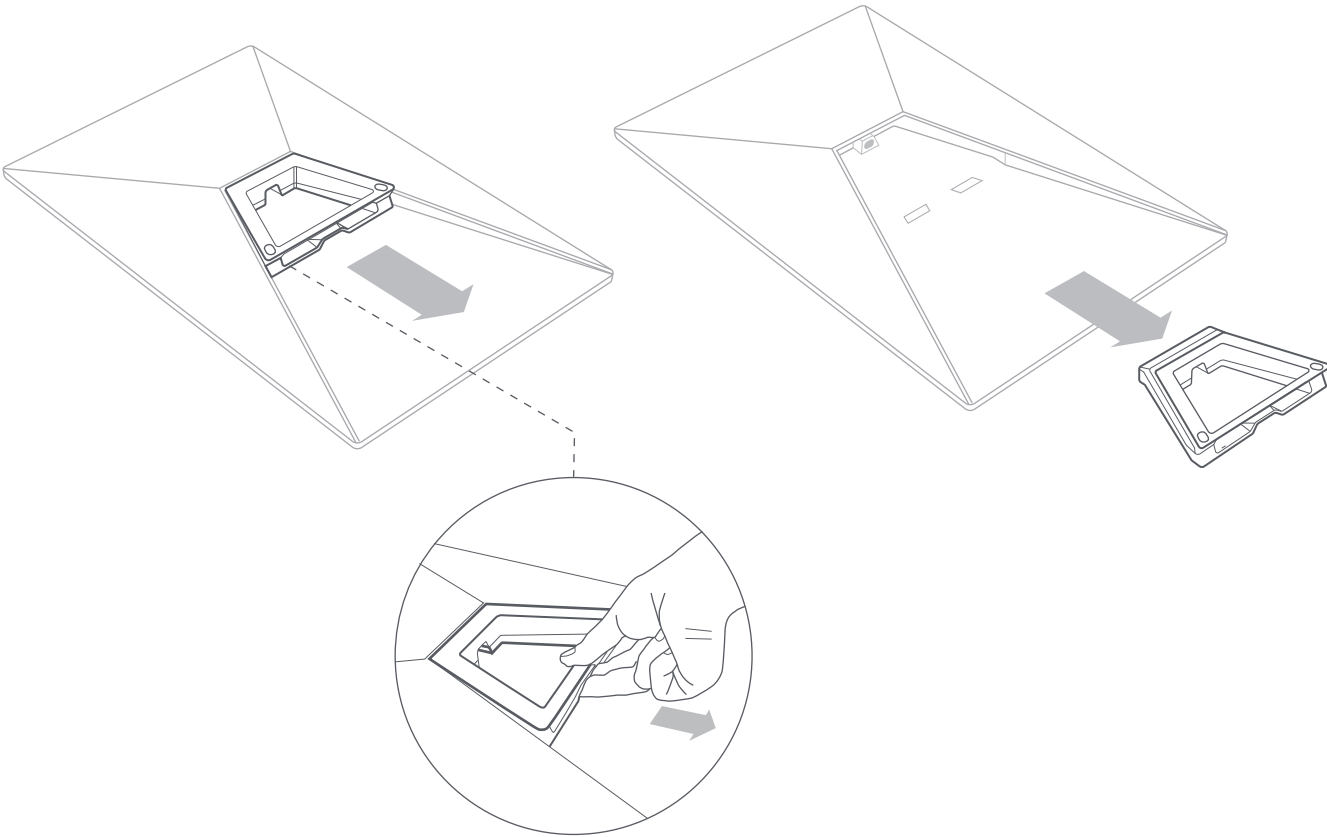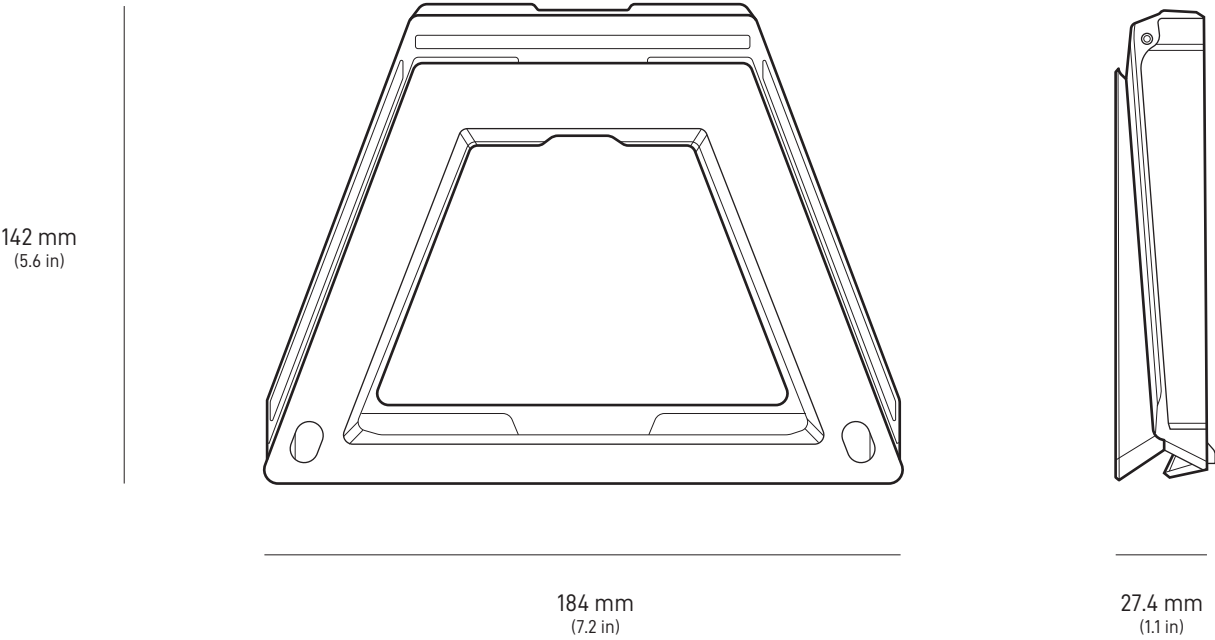



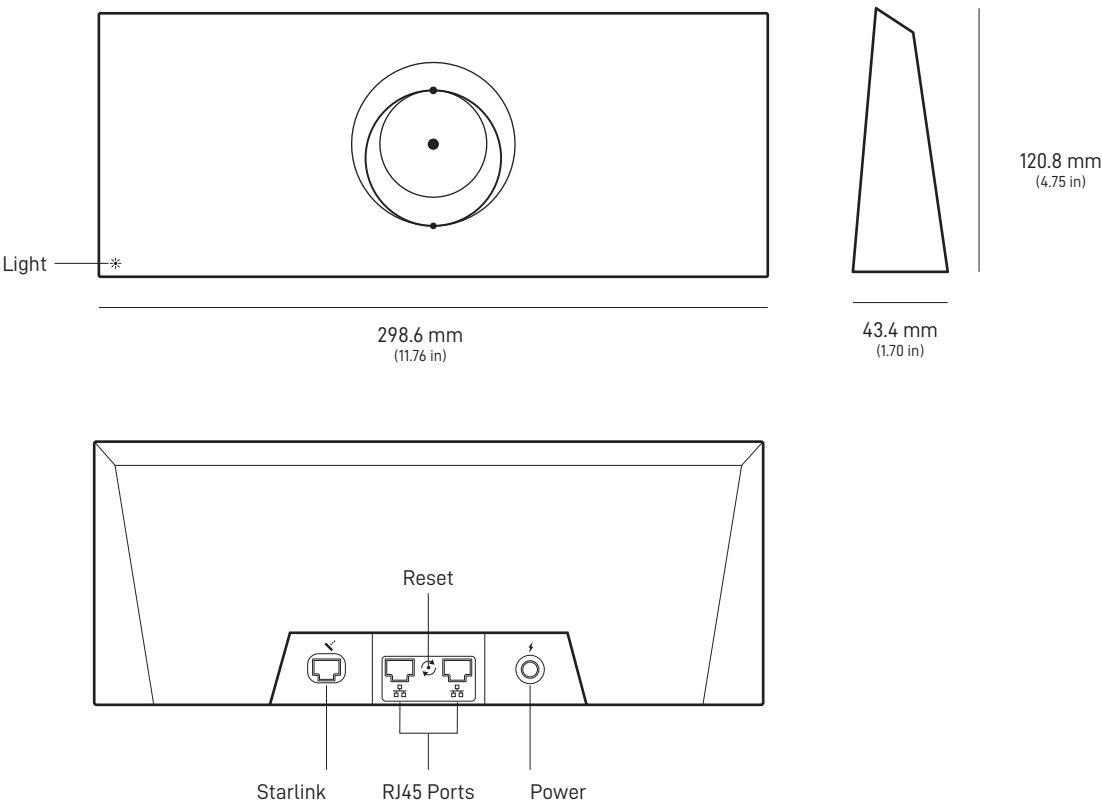


Product Dimensions	43.4 x 298.6 x 120.4 mm (1.7 in x 11.76 in x 4.74 in)
Wi-Fi Technology	802.11 a/b/g/n/ac/ax
Generation	WiFi 6
Radio	Tri Band 4 x 4 MU-MIMO
Ethernet Ports	Two (2) Latching Ethernet LAN ports with removable cover
Coverage	Up to 297 m² (3,200 ft²)
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Weight	0.57 kg (1.25 lbs)
Security	WPA2
Environmental Rating	IP56 Rated (Water Resistant), configured for indoor use
Power Indicator	LED face plate, lower left corner of router
Mesh Compatibility	Compatible with Starlink Gen 2 and Gen 3 Mesh Nodes, up to 3 Starlink Mesh Nodes
	*Not compatible with 3rd party mesh systems
Devices	Connect up to 235 devices

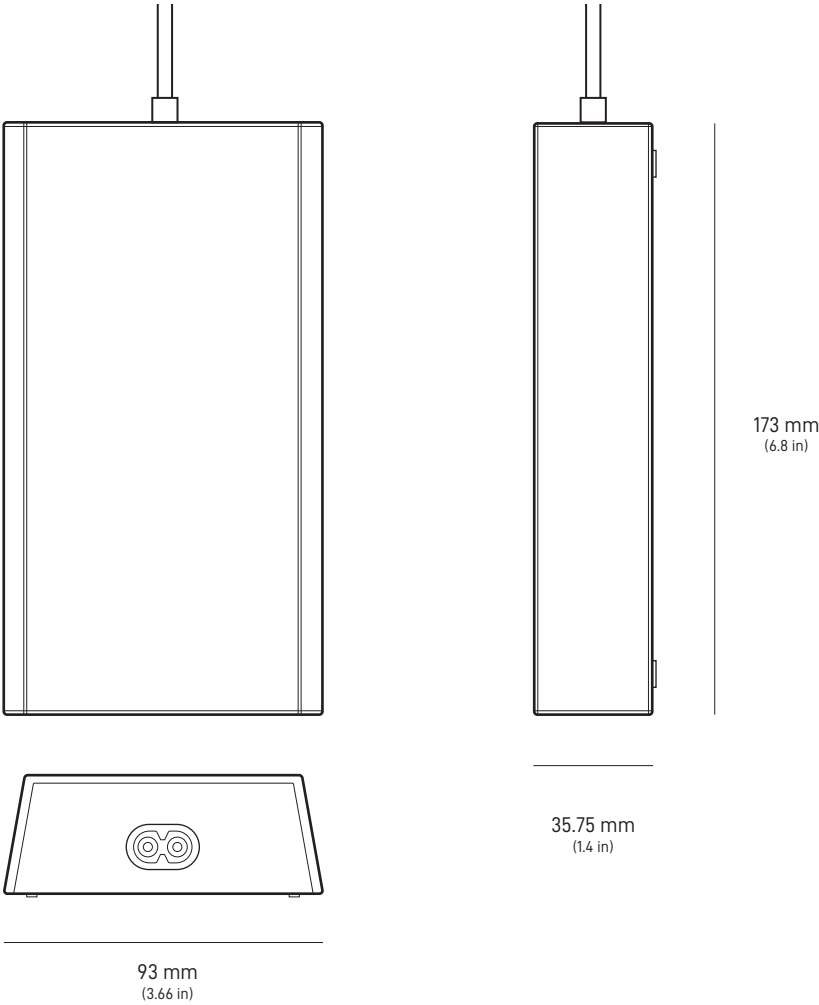

Product Dimensions	173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)
Weight	0.65 kg (1.43 lbs)
Environmental Rating	IP66 Type 4
Operating Temperature	-30°C to 60°C (-22 to 140°F)
Power Specifications	100-240V ~ 2.5A 50 - 60 Hz

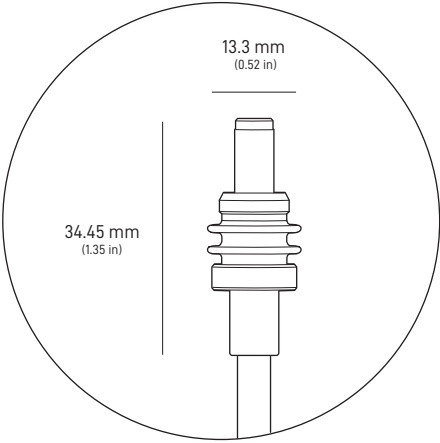

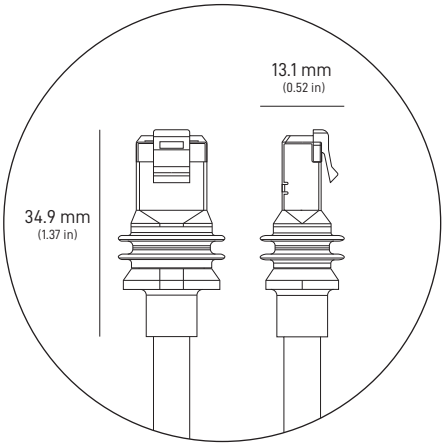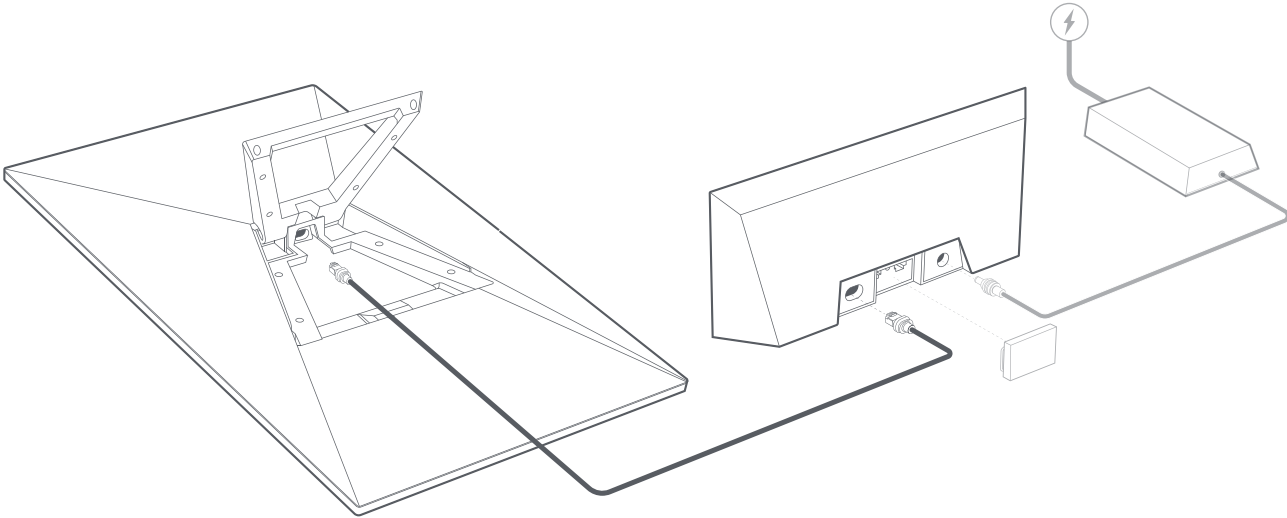

Pin 1	Wire Color
Shield	Drain - Bare Wire
8	Brown
7	White / Brown
6	Green
5	White / Blue
4	Blue
3	White / Green
2	Orange
1	White / Orange

Pin 2
Shield
8
7
6
5
4
3
2
1

