



Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [One for All URC 7125](#) o cerca il tuo prodotto tra le [migliori offerte di Telecomandi](#)




Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [One for All URC 7125](#) o cerca il tuo prodotto tra le [migliori offerte di Telecomandi](#)

ONE FOR ALL


ENGLISH

URC7125


SIMPLE SET UP GUIDE

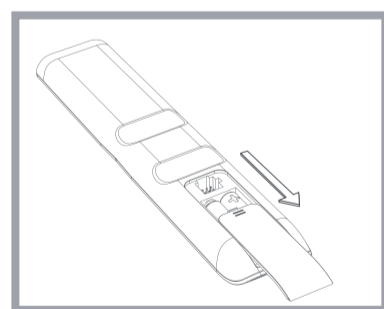

Open the battery door.

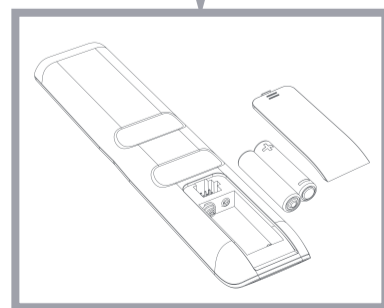

Insert 2 AAA batteries.

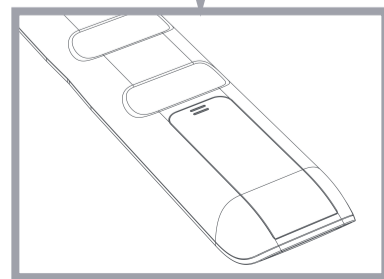

ENGLISH

KEY TABLE

MAGIC: Used to set up your remote

WATCH TV: Combines TV and STB into one mode for TV viewing

MODE: Scroll through the devices your remote is set up to control

FAV: Favourite Channels

GUIDE: TV Guide, EPG

SMART: Access internet and Smart features of your TV or internet-connected device

BACK: Back one step in the Menu of the current device

VOL: Volume Up, Down and Mute

16:9: Adjust the Aspect Ratio (screen size) of your TV or Set Top Box

LIST: Displays a list of recorded programmes

MAGIC: Used to set up your remote

POWER: Power on/off

TV STB: Select the device type

MODE: Select the device mode

1-9, 0: Numeric keypad

AV: Select the input on the current device

INFO: Displays info of current playback

EXIT: Exit from the Menu of the current device

MENU: Show the menu of the current device

PP: Previous Program, Last Channel

+/-: Channel Up and Down

16:9, 3D: Adjust Aspect Ratio and 3D functionality

Red, Green, Yellow, Blue - Fastext/Quick access keys

PLAYBACK: Playback keys for the current device

HOW TO SET UP YOUR REMOTE

A – SIMPLESET

SimpleSet is a quick and easy way of setting up the remote to control the most popular brands of each device type with only a few key presses, typically in under a minute per device. The first step is to select which device you are going to set up. The following is a list of Device Modes on the remote control, and the Device types that can be set up on that mode:

TV	STB
Device Mode	Type of device
TV	TV, HDTV, LED, LCD, Plasma, Projector
STB	Set Top Box, Satellite Receiver, Cable Converter, Freeview, DVB-T, IPTV

For each Device type, there is a list of the top brands, each with a number assigned to it, for example 6 for a Samsung TV. Locate your device and brand in the list that follows:

TV	STB: Sat, Cable, DVB-T
1 Alba / Bush / Goodmans	6 Samsung
2 Grundig	7 Samsung
3 LG	8 Sky Italia / SFR / Neuf TV
4 Panasonic	9 Sky Deutschland / Österreich / Zealand
5 Philips	0 UPC / Cablecom / UPC Direct / Virgin Media
	6 Humax
	7 Samsung
	8 Sky Italia / SFR / Neuf TV
	9 Sky Deutschland / Österreich / Zealand
	0 UPC / Cablecom / UPC Direct / Virgin Media
	6 Humax
	7 Samsung
	8 Sky Italia / SFR / Neuf TV
	9 Sky Deutschland / Österreich / Zealand
	0 UPC / Cablecom / UPC Direct / Virgin Media

HOW TO SET UP YOUR REMOTE

A – SIMPLESET

To set up your device

- Turn on your device (not on standby) and point the OFA remote towards it.
 - Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
 - Press the MODE key repeatedly until the LED for the device you want to set up is lit.
 - Hold down the digit for your brand and device as listed above (e.g. 6 for Samsung TV).
 - The remote will send Power every 3 seconds until your device switches off.
 - As soon as your device switches off, release the digit.
 - The LED will blink twice and go out. The remote should now operate your device.
- If you find one or more keys do not work as you expect, start again at step 1 – the remote will start with the next code in the memory.

HOW TO SET UP YOUR REMOTE


B – SET UP BY CODE







If your brand is not listed in section A, you can set up your device by trying codes individually. To do this:

- Turn your device on (not on standby).
 - Locate the brand of your device in the code list (pages 146-157). Codes are listed by Device Type and Brand.
 - Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
 - Press the MODE key repeatedly until the LED for the device you want to set up is lit.
 - Enter the first 4 digit code listed for your brand (e.g. 0556 for a Bennett TV).
 - The LED will blink twice and go out.
 - Now aim the remote towards your device and press the POWER key.
 - If the device turns off, your remote is ready to use. If not, repeat steps 3-7 with the next code in the list.
- Some codes are quite similar. If you find that one or more keys do not operate as you expect, try again from step 3 with the next code in the list.

LEARNING

Your One For All remote control can learn any function from any other working remote control. This can be useful if you are missing one or more functions from your original remote control and would like to add them to the ONE FOR ALL. You can learn onto any key except MAGIC or MODE. You can also learn a complete device if you can't find a code. To learn, firstly make sure you have all your original remote controls to hand, and that they have working batteries in. To learn functions, the original remote should be approximately 3cm from the OFA remote, pointing towards it as shown below:



-  Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
-  Press the MODE key repeatedly until the LED for the device you want to learn functions on is lit.
-  Press 975 – the LED will blink twice.
-  Press and release the key you want to learn a function onto (for example the 3D key) – The red LED will blink continuously.
-  Press and release the key on the original remote.
- The LED will blink twice to indicate the key has been learned correctly.
- Repeat steps 4 and 5 for each key you want to learn – remember you can learn from multiple remotes, but only one function per key.
-  When you learned all the functions you require, press and hold the MAGIC key until the LED blinks twice and turns off.

HINTS

- If the LEDs shows one long blink at step 6, the function was not learned correctly, please try again from step 4.
- If you find one or more keys don't work properly after set up, you can re-enter the learning mode at any time by repeating the procedure from step 1.

TO DELETE A LEARNED FUNCTION, THE PROCEDURE IS:

- Hold down MAGIC until the LED under the TV key blinks twice. The LED under the current mode key will stay lit.
- Using the MODE key, make sure the LED for the device you want to delete functions from is lit.
- Press 976 – the LED will blink twice
- Press the key to delete twice – the LED will blink twice.

Repeat the above procedure for each key you want to delete.

ACTIVITIES

The Watch TV feature combines TV and STB into a single mode. In this mode the Volume, AV, 16:9 and 3D keys will control the TV, and the rest of the keys will control the STB.

As the AV key is intended to select the input on your TV and most TVs use a menu to select from a list of inputs, when the AV key is pressed in Watch TV Mode, the Menu Up, Down, Left, Right and OK keys temporarily control the TV. If the OK key is pressed, or no key is pressed for ten seconds, these keys will revert to controlling the STB.






If you hold down the Power key for 2 seconds in Watch TV Mode, the remote will send the Power function for TV and STB.

MACROS

PROGRAM A MACRO




You can program any key on your OFA remote (except MAGIC or MODE) to send multiple commands on a single press – a Macro. This can be useful for controlling multiple devices to put them in a certain state – for instance you could put your TV on HDMI 1 and press Power on the Set Top Box to start watching TV.

To program a macro, the procedure is as follows:

-  Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
 -  Press 995 – the LED will blink twice.
 - Next select the key you want to program the Macro on.
 -  Now use the MODE key to select the device you want the first function of the Macro to come from, for example TV.
 -  Next, press the key you want to include in the Macro, for example the AV key.
 - Repeat steps 4 (if necessary) and 5 to add more keys to the Macro. You can include up to 15 key presses .
 -  To store the Macro, hold down the MAGIC key until the LED blinks twice.
- If the LED shows a long blink when you press a key in steps 4 or 5, you have entered too many keys, please try again.

DELETING A MACRO

If you want to remove a macro from a key, please perform the following:

-  Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
-  Press 995 – the LED will blink twice.
- Press the key the macro is programmed on.
-  Now hold down the MAGIC key until the LED blinks twice – the Macro is deleted.

VOLUME LOCK

If you always use one device to control volume, for example your TV, you can set up the One For All to always control that device, regardless of which device your remote is controlling. To do this:

- Hold down MAGIC until the LED under the device blinks twice. The LED under the current device will stay lit.
- Press 993 – the LED will blink twice.
- Use the MODE key to select the Device you want to lock the Volume to.
- Press MAGIC once – the LED will blink twice and volume is now locked.

To unlock the volume and set every device back to controlling its own volume, the procedure is:

- Hold down MAGIC until the LED under the TV key blinks twice. The LED under the current mode key will stay lit.
- Press 993 – the LED will blink twice.
- Press VOLUME UP – the LED will blink twice and Volume is now unlocked.

PRODUCT DISPOSAL

(EUROPEAN DIRECTIVE 2002/96/EC)

The crossed out wheeled bin symbol on this product ensures that this product is manufactured using high quality components that can be recycled and reused according to European Directive 2002/96/EC. Please do not dispose this product with your normal household waste but inform yourself about the local separate collection for electrical and electronic products to dispose this product correctly. This will help preventing potential negative effects on the environment and/or human health.

BATTERY DISPOSAL and safety

(EUROPEAN DIRECTIVE 2006/66/EC)

Please do not dispose your batteries with your normal household waste but inform yourself about the local separate collection for empty batteries to dispose them correctly. This will help preventing potential negative effects on the environment and/or human health. Keep batteries away from fire, out of direct sunlight, and away from other sources of heat.

UNIVERSAL ELECTRONICS INC/ONE FOR ALL warrants to the original purchaser that this product will be free from defects in materials and workmanship under normal and correct use for a period of one (1) year from the date of original purchase. This product will be replaced free of charge if it has been proven to be defective within the one (1) year warranty period. This warranty does not cover cartons, carrying cases, batteries, broken or marred cabinets or any other item used in connection with the product. Any further obligation than listed above is excluded. Please notice that we need your purchase receipt so that we may establish your eligibility for service. If you have bought this product for purposes which are not related to your trade, business or profession, please remember that you may have legal rights under your national legislation governing the sale of consumer goods. This guarantee does not affect those rights.

UK
www.oneforall.com

New Zealand
0800 1425569
sales@amber.co.nz
www.amber.co.nz
www.oneforall.com

Ireland
www.oneforall.com

South Africa
0861100551
support@oneforall.co.za
www.connoisseur.co.za
www.oneforall.com

Australia
1 300 888 298
ofa.support@ambertech.com.au
www.ambertech.com.au
www.oneforall.com