



Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [StarTech.com](https://www.startech.com) [DKT30CHVPD2](#) o cerca il tuo prodotto tra le [migliori offerte di Hub](#)



Questo manuale d'istruzione è fornito da trovaprezzi.it. Scopri tutte le offerte per [StarTech.com](https://www.startech.com) [DKT30CHVPD2](#) o cerca il tuo prodotto tra le [migliori offerte di Hub](#)




Quick-Start Guide

USB-C™ Multiport Adapter - HDMI & VGA - 3 x USB - GbE- 100W PD - Extended Cable

Product Diagram (DKT30CHVPD2)

Front Angle View

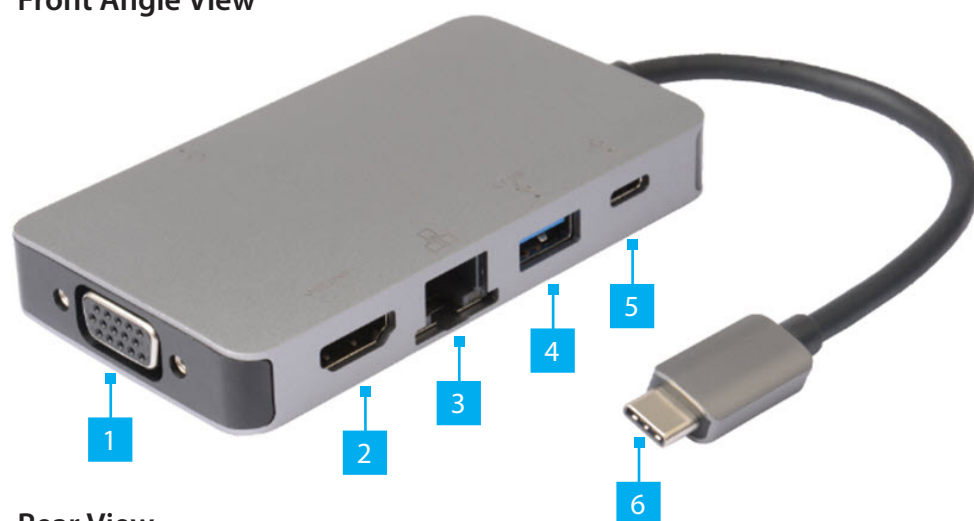

Rear View



Port	Specifications and Installation
1	VGA Output Port <ul style="list-style-type: none"> Resolution of up to 1920x1080@60Hz Connect the Multiport Adapter to a VGA Display Device, using a VGA M/M Cable
2	HDMI Output Port <ul style="list-style-type: none"> HDMI 1.4b 4K @ 30Hz Connect the Multiport Adapter to an HDMI Enabled Display Device, using an HDMI Cable

3	RJ45 Port <ul style="list-style-type: none"> 10/100/1000 Mbps Connect the Multiport Adapter to a Network Device, using a Network Cable
4	USB-A Charging Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Maximum 1.5A for downstream charging Connect the Multiport Adapter to a SuperSpeed USB 5Gbps Peripheral or Storage Device (e.g. flash drive), using a SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Cable
5	USB-C Device Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) USB Power Delivery (PD) pass-through <ul style="list-style-type: none"> Connect the Host Computer's Power Adapter to the SuperSpeed USB-C Port on the Multiport Adapter for a maximum of 85W delivered to the Host Computer Note: The Multiport Adapter accepts a 100W Power Adapter and reserves 15W to power the Multiport Adapter. -- Or -- Connect the Multiport Adapter to a SuperSpeed USB 5Gbps Peripheral or Storage Device (e.g. flash drive), using a SuperSpeed USB-C 5Gbps (USB 3.2 Gen 1) Cable
6	USB-C Host Connector <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) USB PD 3.0 85W (20V/5A) Note: SuperSpeed USB-C Port will accept up to 100W Power Source input DP 1.2 Alt Mode Charge the Host Device while using the Multiport Adapter Connect the Multiport Adapter to a Laptop, using the SuperSpeed USB-C Host Connector
7	USB-A Device Port <ul style="list-style-type: none"> SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Maximum 900mA downstream charging Connect the Multiport Adapter to a SuperSpeed USB 5Gbps Peripheral or Storage Device (e.g. flash drive), using a SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Cable

To view manuals, FAQs, videos, drivers, downloads, technical drawings, and more, visit www.startech.com/support.

Requirements

For the latest requirements, please visit:

www.startech.com/DKT30CHVPD2.

- Host Computer with USB-C Port
 - DP-Alt Mode Compatible
 - USB PD Support

Installation

Notes: Installation is automatic for all modern Operating Systems. If the drivers do not auto-install, please visit www.startech.com/DK30CHVPD2 to locate the latest drivers.

Operation

RJ45 Port LED Indicators

LED Color	Status	Indication
Orange/ Amber	Solid	• Link speed is either 1000Mbps (1 GbE), 100Mbps, or 10Mbps
	Off	• No connection established
White	Flashing	• Network traffic detected
	Off	• No link established

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders. iPad Pro® is a trademark of Apple Inc., registered in the U.S. and other countries.

Warranty Information

This product is backed by a three-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas touchez le produit lorsqu'il est sous tension.

安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

StarTech.com Ltd.
45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

FR: fr.startech.com
DE: de.startech.com
ES: es.startech.com
NL: nl.startech.com
IT: it.startech.com
JP: jp.startech.com