



Removing the top and the side panels

*Please take off the top panel before removing the side panels

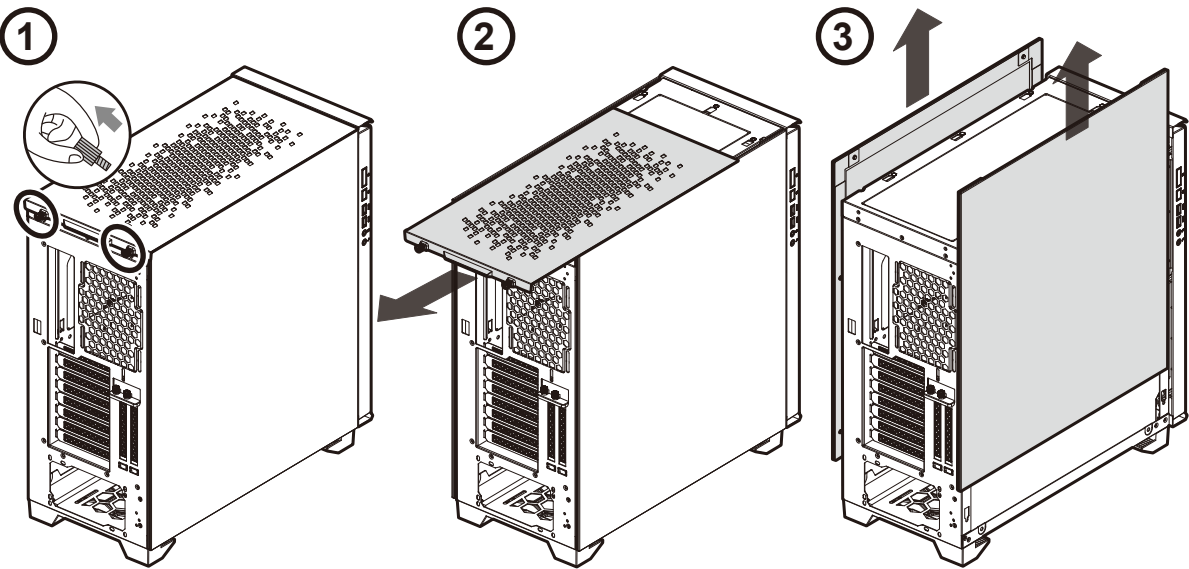


Removing the front panel

1. Please remove 2 screws at the right panel.
2. When pushing up the front panel, please don't pull the i/o cables too hard.

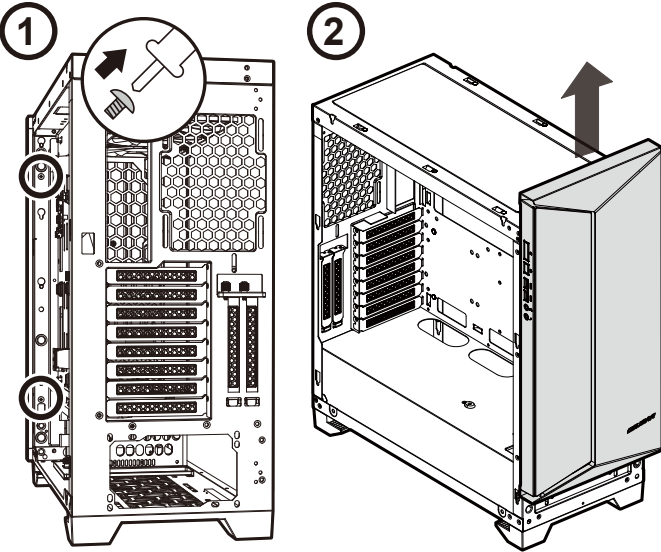


Opening the cable management cover

*Please press the 2 buckles at the right of the cable management cover before opening it.

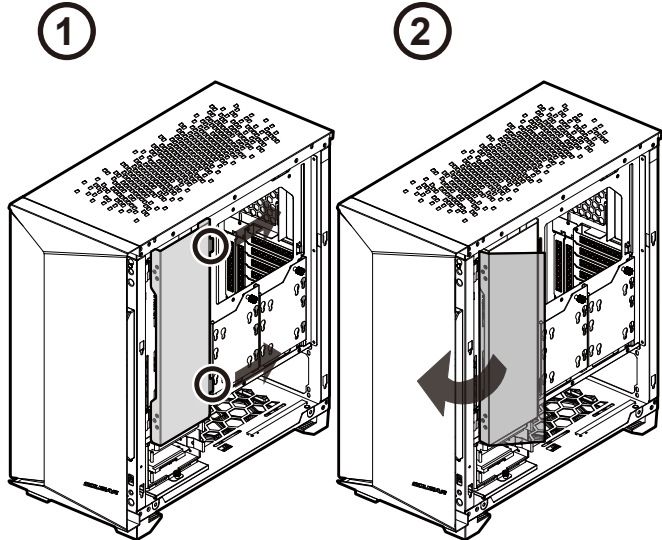


Removing the cable management bar


1. Please remove the cable management bar when installing E-ATX motherboard.
2. Please move the management bar forward when installing CEB motherboard.

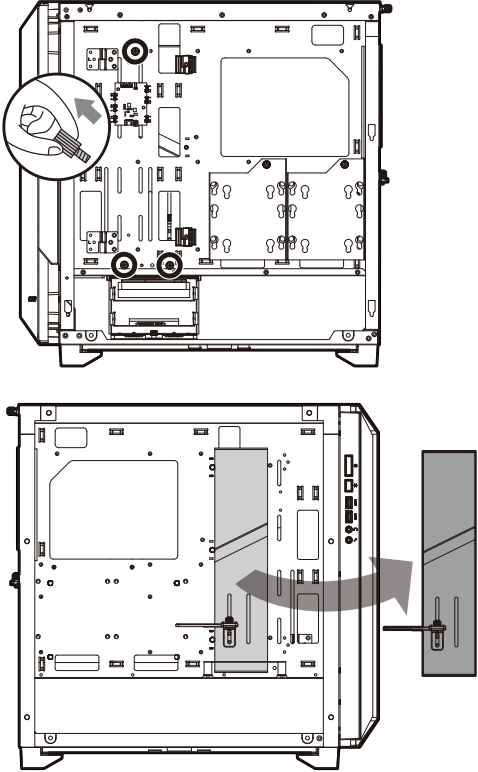

Installing water cooling radiators & cooling fans

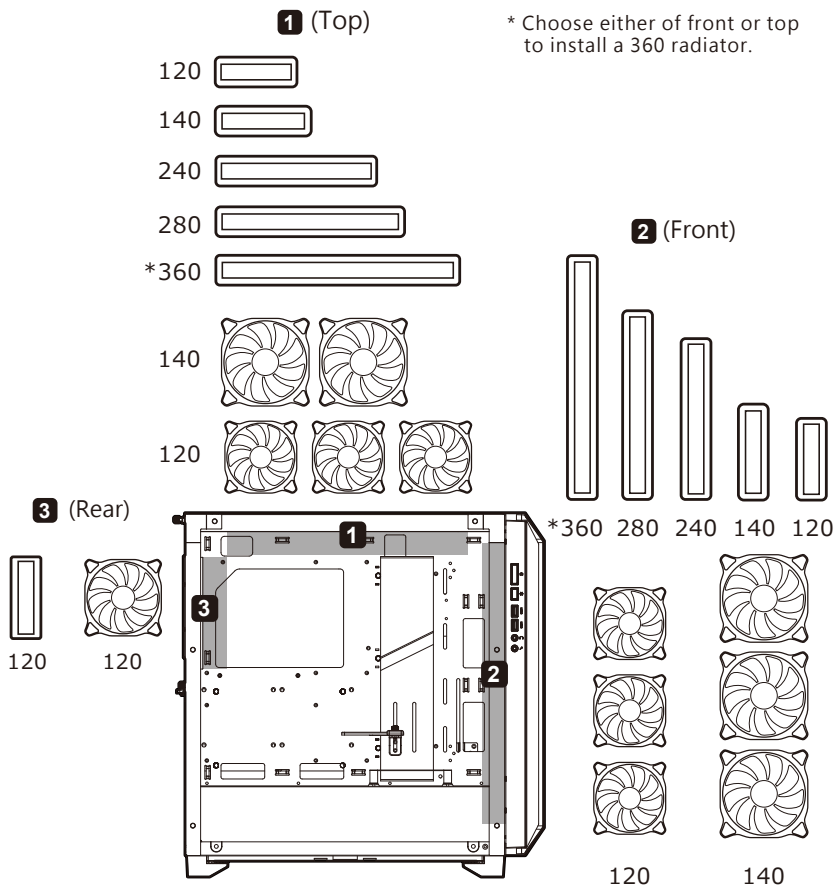


Installing the internal 2.5" SSDs & 3.5" HDDs

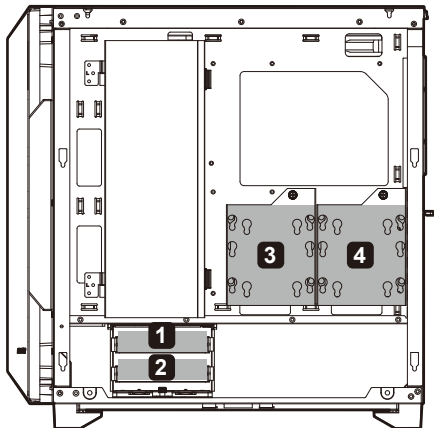


*Please use rubber mounts with screws when installing 2.5" SSDs & 3.5" HDDs.

	2.5" SSD screws	X 12
	3.5" HDD screws	X 12
	2.5" SSD & 3.5" HDD rubber mounts	X 4

RGB & Fan control system

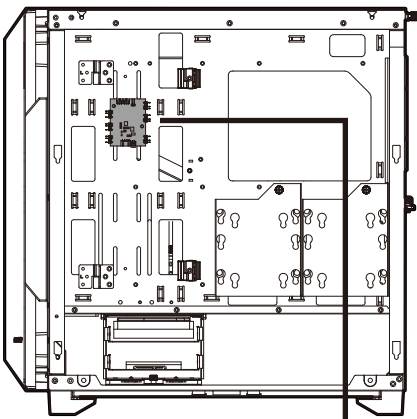


- First Mode: 13 Preset Lighting Effects
You can use the front panel's RGB SW button to switch between the thirteen beautiful lighting effects we have preset for you.
- Second Mode: Motherboard Synchronization
Please use the included adaptor (see picture below) to connect to a compatible motherboard's 3-pin 5V Addressable RGB header. Then, press and hold the RGB SW button for 3-6 seconds, the LED strip at the front panel will flash in white for two consecutive times.
※ If you press and hold the RGB SW button for 3-6 seconds again, the LED strip at the front panel will flash in white for two consecutive times. It will be returned to the First mode: 13 Preset Lighting Effects.
- Third Mode: Turn off RGB LED lighting effects.
Please press and hold the RGB SW button for over 6 seconds and the LED strip at the front panel will flash in white for four consecutive times.
※ If you press and hold the RGB SW button for 1 seconds again, the RGB LED lighting effects will be turned on.

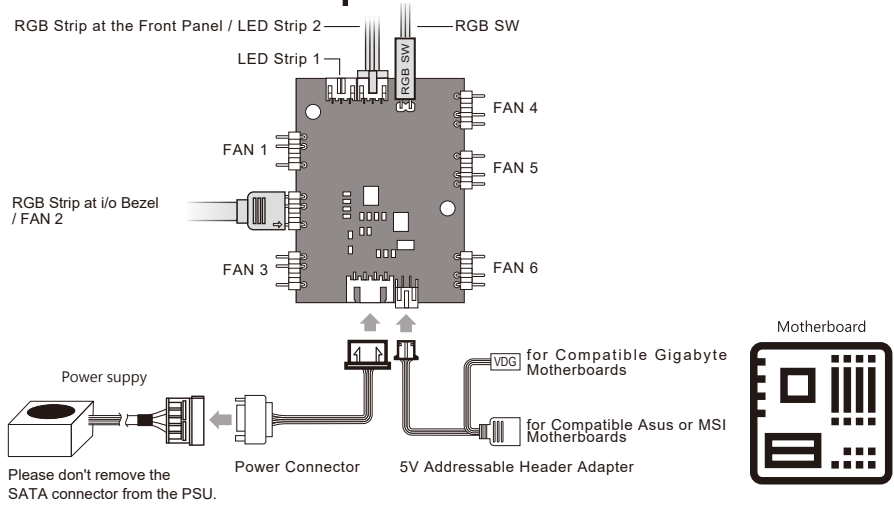

Installing PCI-E cards

- Support for one vertical graphics card up to 380mm-long

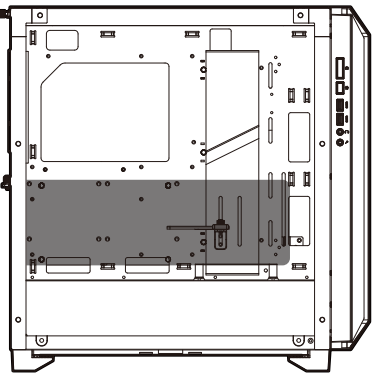

ACCESSORY KIT

	Motherboard screws	X 11
	Power supply screws	X 4
	Stand-off	X 3
	2.5" SSD screws	X 12
	3.5" HDD screws	X 12
	2.5" SSD & 3.5" HDD rubber mounts	X 4
	Fan screws	X 12
	Cable ties	X 4