


QUICK START GUIDE

TUNER2




HARMAN


WHAT'S IN THE BOX

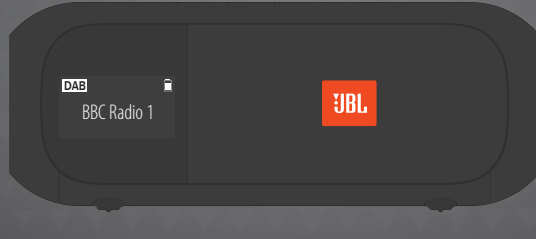

BUTTONS

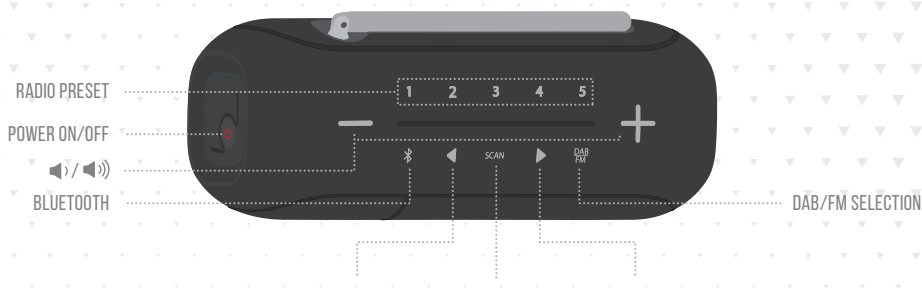


CONNECTIONS

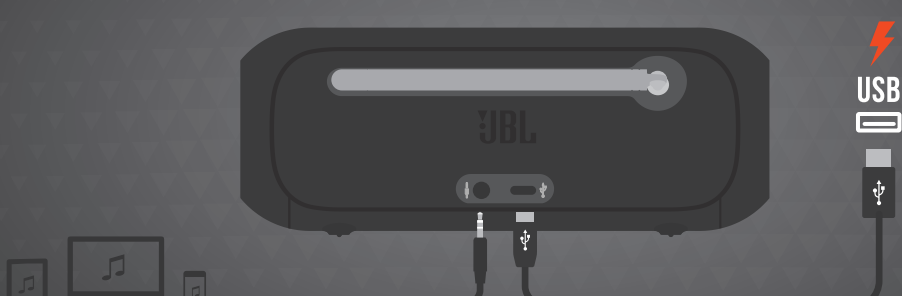


SOME RADIO STATIONS MAY HAVE NOISE INTERFERENCE WHEN LISTENING TO RADIO WHILE CHARGING.

LANGUAGE SETTING

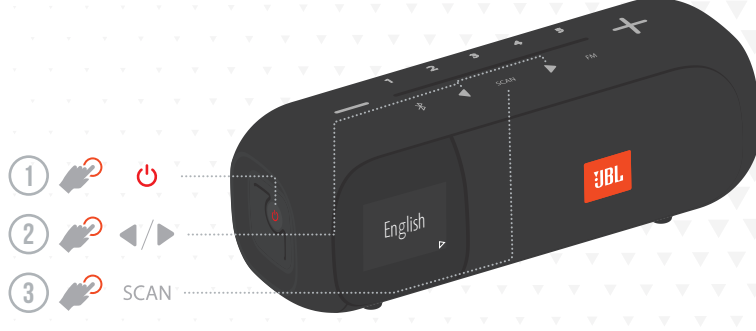


SET DEFAULT LANGUAGE FOR THE FIRST TIME OR AFTER FACTORY RESET (PRESS * + 1 >10 SECONDS)

RADIO TUNING

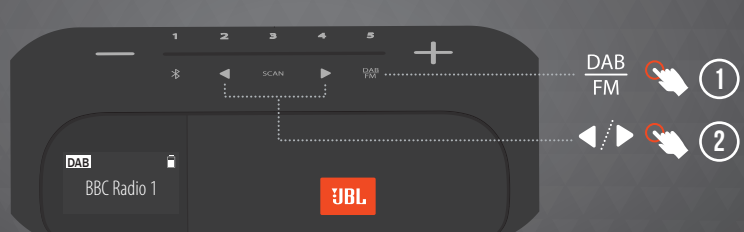


WHEN DAB MODE IS ACTIVATED FOR THE FIRST TIME, A FULL SCAN WILL AUTOMATICALLY START.

RADIO AUTO SCANNING

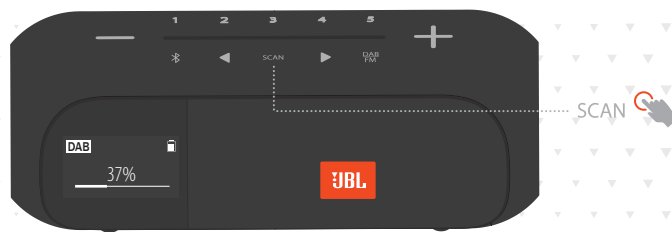

- IN FM MODE, JBL TUNER 2 WILL AUTOMATICALLY SEARCH FOR AND TUNE TO AN AVAILABLE RADIO STATION.
- IN DAB MODE, JBL TUNER 2 SCANS ALL AVAILABLE DAB RADIO STATIONS AND PLAY THE FIRST AVAILABLE RADIO STATION.

RADIO PRESET

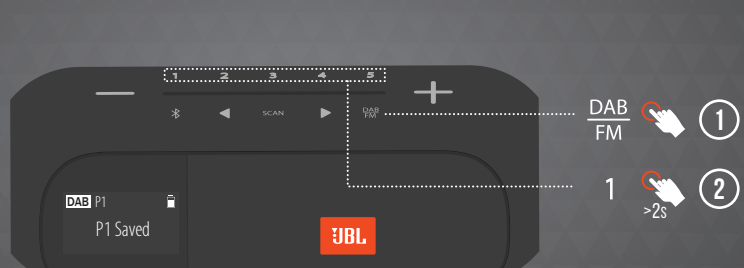


YOU CAN SAVE A MAXIMUM OF 5 PRESET RADIO STATIONS.

BLUETOOTH



WATERPROOF IPX7

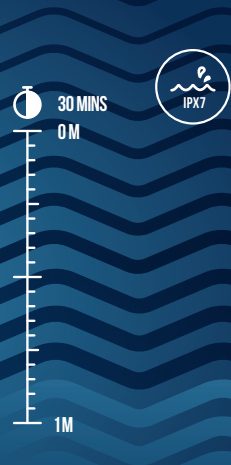

TECH SPEC

Transducer:	1 x 1.75"	Bluetooth® version:	4.2
Rated output power:	5 W RMS	Bluetooth® profile:	A2DP V1.2, AVRCP V1.5
Frequency response:	80 Hz - 20 kHz (-6 dB)	Bluetooth® transmitter frequency range:	2.402 - 2.480 GHz
Signal-to-noise ratio:	> 80 dB	Bluetooth® transmitter power:	0 - 9 dBm (EIRP)
Battery type:	Lithium-ion polymer 9.075 Wh	Bluetooth® transmitter modulation:	GFSK, π/4 DQPSK, 8DPSK
Battery charge time:	3.5 hours (5V / 0.9 A)	DAB Tuning range:	174.928 MHz - 239.200 MHz (Band-III)
Charging Input:	5 V, 1.2 A	FM Tuning range:	76 MHz - 108 MHz (varies by countries)
Music playing time:	up to 12 hours for radio listening (dependent on volume level and audio content)	Dimensions (W x H x D):	180 x 70 x 72 (mm) / 7.08" x 2.76" x 2.83"
		Weight:	0.54 kg (1.20 lbs)

