



Questo manuale d'istruzione è fornito da [trovaprezzi.it](https://trovaprezzi.it). Scopri tutte le offerte per [D-Link DAP-X2810](#) o cerca il tuo prodotto tra le [migliori offerte di Altri dispositivi di rete](#)



Questo manuale d'istruzione è fornito da [trovaprezzi.it](https://trovaprezzi.it). Scopri tutte le offerte per [D-Link DAP-X2810](#) o cerca il tuo prodotto tra le [migliori offerte di Wireless e Bluetooth](#)

**D-Link**

2021 | Business Class Networking

# NUCLIAS CONNECT DAP-X2810 User Guide

V 1.01



# Table of Contents

<b>Nuclias Connect .....</b>	<b>4</b>	Multi-SSID.....	27
Introduction .....	4	VLAN.....	29
Nuclias Connect Key Features.....	5	VLAN List.....	29
Package Contents.....	6	Port List.....	30
System Requirements.....	6	Add/Edit VLAN .....	31
<b>Hardware Overview.....</b>	<b>7</b>	PVID Settings.....	32
LEDs.....	7	Intrusion.....	33
Connections .....	7	Schedule .....	34
<b>Basic Installation .....</b>	<b>8</b>	Internal RADIUS Server.....	35
Hardware Setup .....	8	ARP Spoofing Prevention .....	36
Configure the access point.....	8	Bandwidth Optimization .....	37
<b>Setup Wizard.....</b>	<b>9</b>	Captive Portal.....	39
<b>Web User Interface .....</b>	<b>10</b>	Authentication Settings-Web Redirection Only	39
Wireless .....	11	Authentication Settings- Username/Password..	41
Access Point Mode .....	11	Authentication Settings- Passcode .....	43
WDS with AP Mode.....	13	Authentication Settings- Remote RADIUS.....	46
WDS Mode .....	15	Authentication Settings- LDAP.....	48
Wireless Security .....	17	Authentication Settings- POP3.....	50
Wired Equivalent Privacy (WEP) .....	17	Login Page Upload.....	52
Wi-Fi Protected Access (WPA / WPA2 / WPA3) ....	18	MAC Bypass.....	53
LAN .....	20	DHCP Server .....	54
IPv6 .....	21	Dynamic Pool Settings.....	54
Advanced Settings.....	22	Static Pool Setting .....	55
Performance .....	23	Current IP Mapping List.....	57
Wireless Resource .....	25	Filters.....	58
		Wireless MAC ACL.....	58

WLAN Partition .....	59	Configuration File Upload .....	80
IP Filter Settings.....	60	Time and Date Settings .....	81
Traffic Control.....	61	Configuration and System.....	82
Uplink/Downlink Setting .....	61	System Settings.....	83
QoS.....	62	Help .....	84
Traffic Manager.....	63	<b>Technical Specifications .....</b>	<b>85</b>
Status .....	64	<b>Antenna Pattern .....</b>	<b>86</b>
Device Information .....	65	<b>Warranty .....</b>	<b>88</b>
Client Information .....	66	<b>Power Usage.....</b>	<b>95</b>
WDS Information Page .....	67	<b>Registration .....</b>	<b>96</b>
Channel Analyze .....	68		
Statistics .....	69		
Ethernet Traffic Statistics.....	69		
WLAN Traffic Statistics.....	70		
Log .....	71		
View Log.....	71		
Log Settings.....	72		
Maintenance Section .....	74		
Administration.....	75		
Limit Administrator .....	75		
System Name Settings .....	76		
Login Settings .....	76		
Console Settings .....	76		
Ping Control Setting .....	77		
LED Settings.....	77		
DDP Setting .....	78		
Country Setting .....	78		
Nuclias Connect Settings .....	78		
Firmware and SSL Upload.....	79		

---

# Nuclias Connect Introduction

Nuclias Connect is D-Link's centralized management solution for Small-to-Medium-Sized Business (SMB) networks. Nuclias Connect makes it easier to analyze, automate, configure, optimize, scale, and secure your network — delivering the convenience of an Enterprise-wide management solution, at an SMB price. Nuclias Connect gives you the financial and technical flexibility to expand from a small network to a larger one of up to 1,000 Access Points (APs), while retaining a robust and centralized management system. With its intuitive Graphical User Interface (GUI), a wealth of enhanced AP features, and a setup wizard that supports 11 languages, Nuclias Connect minimizes the hassle of deployment, configuration, and administration tasks.

Deployable on a Windows server (or Linux via Docker), PC, or Smartphone (via lite management app) the Nuclias Connect free-to-download software is capable of managing up to 1,000 APs without licensing charges, coupled with an inexpensive optional hardware controller (DNH-100 Nuclias Connect Hub) suitable for remote locations. Through software-based monitoring and remote management of all wireless Access Points (APs) on your network, Nuclias Connect offers tremendous flexibility compared to traditional hardware-based unified management systems. Configuration can be done remotely. Network traffic analytics are available at a glance (in whole or in part). Load Balancing, Airtime Fairness, and Localized Throttling are enabled.

Nuclias Connect supports multi-tenancy, so network administrators can grant localized management authority for local networks. In addition, because APs can support 8 SSIDs per radio (16 SSIDs per dual band APs), administrators have the option of using one SSID to create a guest network for visitors.

Nuclias Connect provides direct AP discovery and provisioning when it shares the same Layer-2/Layer-3 network with a given AP, allowing users to find APs and import profiles with minimum effort, which can be applied as needed to groups or individual APs for even more effective configuration.

Since Nuclias Connect's software operates transparently on the network, an AP can be deployed anywhere in an NAT environment. Admins can provide and manage a variety of distributed deployments, including settings and admin account configuration for each deployment.

Nuclias Connect allows for multiple user authentications while enabling specific access control configurations for each SSID, giving admins the option of configuring separate internal networks for different subnets, while enabling more advanced Value-Added Services, such as Captive Portal or Wi-Fi Hotspot.

---

# Nuclias Connect Key Features

- Free-to-Download Management Software
- Searchable Event Log and Change Log
- License-Free Access Points
- Traffic Reporting & Analytics
- Authentication via Customizable Captive Portal, 802.1x and RADIUS Server, POP3, LDAP
- Remote Config. & Batch Config.
- Multilingual Support
- Intuitive Interface
- Multi-Tenant & Role-Based Administration
- Payment Gateway (PayPal) Integration and Front-Desk Ticket Management

For more information on how to use Nuclias Connect with the DAP-X2810, please refer to the Nuclias Connect User Guide.

## Package Contents

- DAP-X2810 802.11ax Power over Ethernet (PoE) Access Point
- Mounting Brackets
- Ceiling Brackets
- Quick Install Guide

**Note:** No PSU supplied. To power the units use a D-Link 802.3at PoE switch or the D-Link DPE-301GI PoE injector.

## System Requirements

- Computers with Windows®, Macintosh®, or Linux-based operating systems with an installed Ethernet Adapter
- Internet Explorer 11, Safari 7, Firefox 28, or Google Chrome 33 and above (for configuration)

# Hardware Overview

## LEDs



## Connections



1	Power/Status	Solid Red	Indicates the access point has malfunctioned.
		Blinking Red	This LED will blink during boot-up.
		Solid Green	Indicates that the DAP-X2810 is working properly.

2	Power Receptor	Connect the supplied power adapter. (*Note: no longer used, replaced by PoE)
3	LAN (PoE) Port	Connect to a Power over Ethernet (PoE) switch or router via an Ethernet cable.
4	Console Port	RJ45 console port for debug


# Basic Installation

## Hardware Setup

To power on the DAP-X2810, you can use ONE of the following methods:

1. Plug one end of your Ethernet cable into the LAN(PoE) port of the DAP-X2810, and the other end into a port on a 802.3at PoE switch.
2. Purchase a DPE-301GI PoE injector separately if you need to connect the access point without a 802.3at PoE Switch.

### Configure the access point

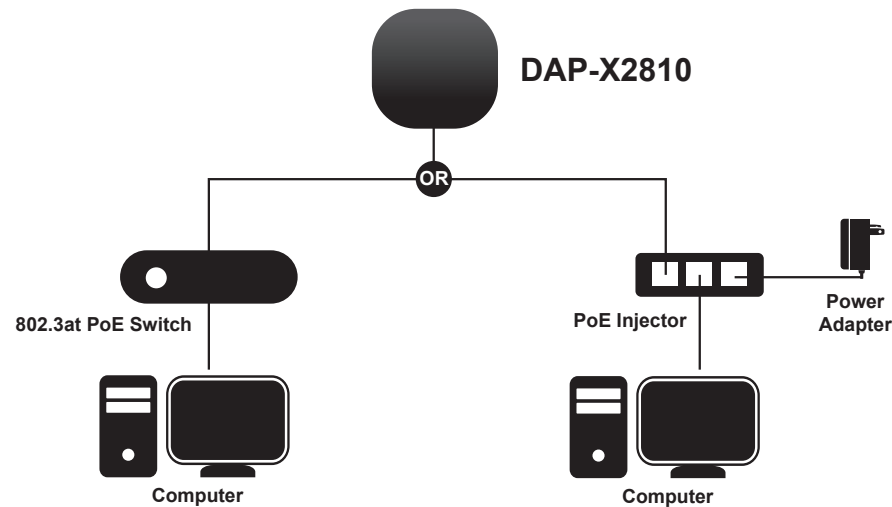

To set up and manage the DAP-X2810, use one of the following methods:

1. Connect the access point and your computer to the same PoE switch. Manage the access point from the computer.  
Enter **dapx2810.local** in the address field of your browser.  
Log in to the Administration Web pages. The default login information is:  
Username: **admin**  
Password: **admin**
2. Connect the access point and your computer via DPE-301GI PoE injector. Manage the access point from the computer.  
Enter **dapx2810.local** in the address field of your browser.  
Log in to the Administration Web pages. The default login information is:  
Username: **admin**  
Password: **admin**

# Setup Wizard


The first login instance displays the System Settings window which requires a change in password. Additional settings include the System Time and System Country functions.

After logging in to the user interface, fill in the New Password and Confirm New Password fields.

In the System Time function, select **Using Network Time Protocol (NTP)** or **Manually** to define the system time. If required, click the Daylight Saving Offset drop-down menu and select the value (minutes).

- Setting NTP System Time: Before trying to configure NTP check, perform a ping test with the NTP server. In the NTP Server field, enter the NTP server to use. Then click the Time Zone drop-down menu and select the appropriate time zone.
- Setting System Time Manually: From the System Date drop-down menu, select the Year, Month, and Day along with the Hour and Minutes appropriate for the AP.
- Enable Daylight Saving: Click the radio button to enable the daylight savings time (DST) function. Set the DST start (24 hours) and end (24 hours) time by clicking on the drop-down menus and setting the Month, Week, Day, Hour, and Minute of the DST starting days.

Once the settings are configured, click **Update** button to accept the configuration and proceed to the main interface menu page.

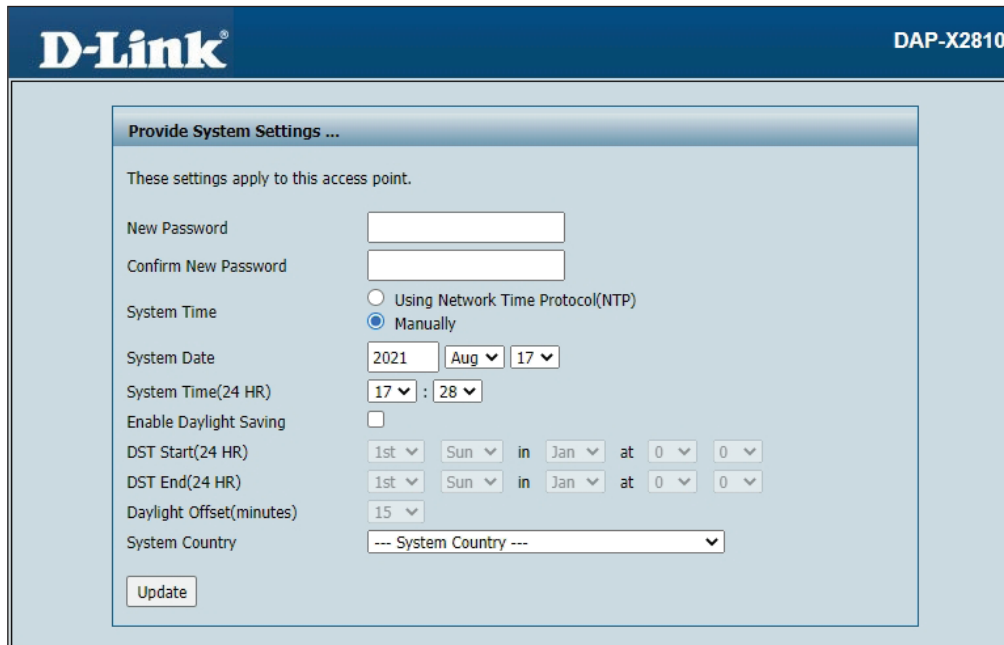


The screenshot shows the 'Provide System Settings ...' window for a D-Link DAP-X2810 access point. The window has a blue header with the D-Link logo and the model number 'DAP-X2810'. Below the header, there is a section titled 'Provide System Settings ...' with a subtitle 'These settings apply to this access point.' The settings are as follows:

- New Password: [Text input field]
- Confirm New Password: [Text input field]
- System Time:  Using Network Time Protocol(NTP)  Manually
- System Date: 2021 | Aug | 17
- System Time(24 HR): 17 : 28
- Enable Daylight Saving:
- DST Start(24 HR): 1st | Sun | in | Jan | at | 0 | 0
- DST End(24 HR): 1st | Sun | in | Jan | at | 0 | 0
- Daylight Offset(minutes): 15
- System Country: --- System Country ---

An 'Update' button is located at the bottom left of the settings area.

# Web User Interface

The DAP-X2810 supports an elaborate web user interface where the user can configure and monitor the device. Launch a web browser, type **dapx2810.local** in the address field and then press Enter to login. Most of the configurable settings are located in the left menu of the web GUI which contains sections called **Basic Settings**, **Advanced Settings** and **Status**.

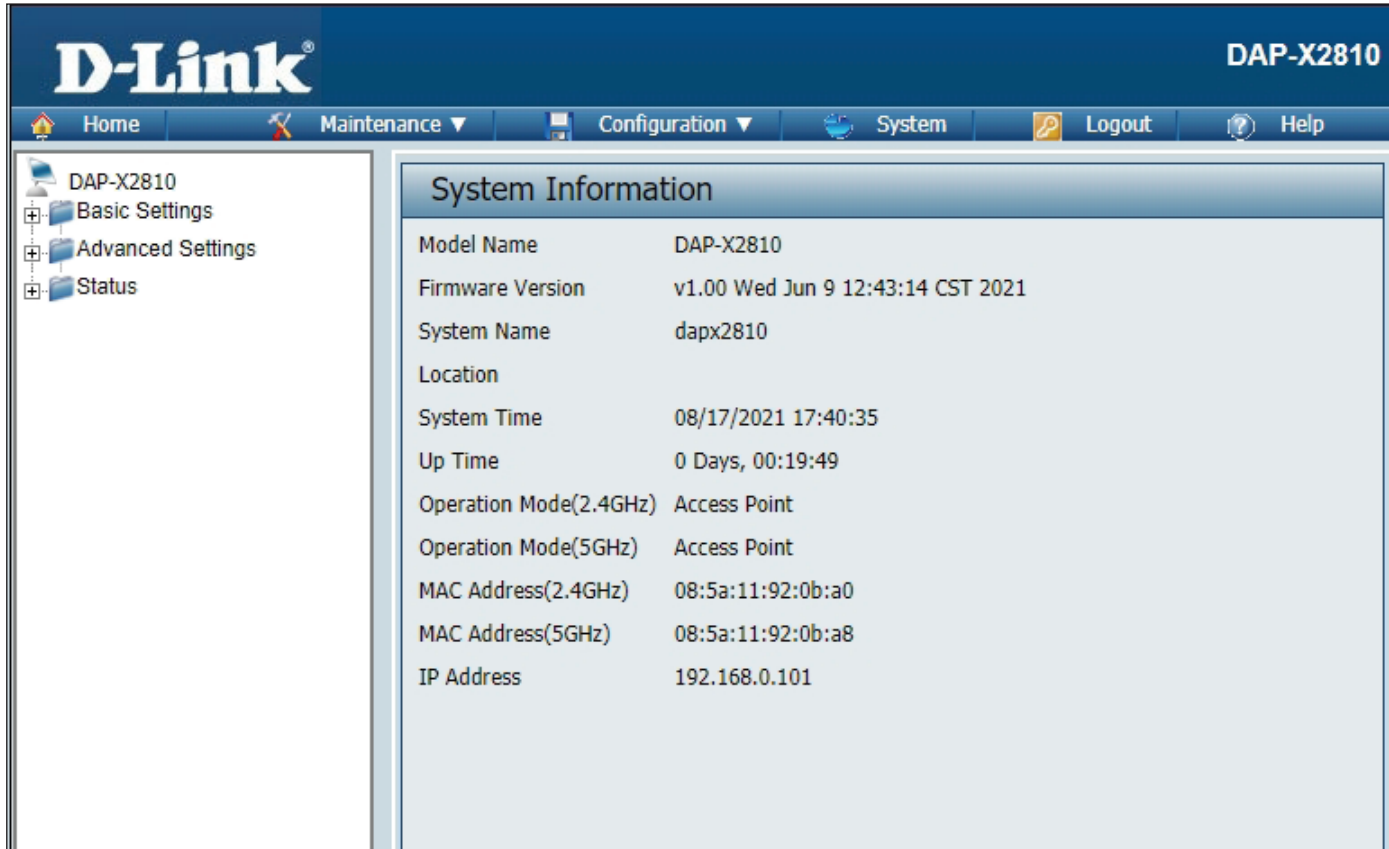

The screenshot displays the D-Link DAP-X2810 web user interface. The top navigation bar includes the D-Link logo, the device name "DAP-X2810", and menu items: Home, Maintenance, Configuration, System, Logout, and Help. A left sidebar menu shows "DAP-X2810" with sub-items: Basic Settings, Advanced Settings, and Status. The main content area is titled "System Information" and contains the following data:

Model Name	DAP-X2810
Firmware Version	v1.00 Wed Jun 9 12:43:14 CST 2021
System Name	dapx2810
Location	
System Time	08/17/2021 17:40:35
Up Time	0 Days, 00:19:49
Operation Mode(2.4GHz)	Access Point
Operation Mode(5GHz)	Access Point
MAC Address(2.4GHz)	08:5a:11:92:0b:a0
MAC Address(5GHz)	08:5a:11:92:0b:a8
IP Address	192.168.0.101

# Wireless

On the wireless settings page, you can set up the basic wireless configuration for the access point. The user can choose from 4 different wireless modes:

**Access Point** - Used to create a wireless LAN

**WDS with AP** - Used to connect multiple wireless networks while still functioning as a wireless access point

**WDS** - Used to connect multiple wireless networks

## Access Point Mode


**Wireless Band:** Select either **2.4 GHz** or **5 GHz** from the drop-down menu.

**Mode:** Select **Access Point** from the drop-down menu.

**Network Name (SSID):** Service Set Identifier (SSID) is the name designated for a specific wireless local area network (WLAN). The SSID's factory default setting is **dlink**. The SSID can be easily changed to connect to an existing wireless network or to establish a new wireless network. The SSID can be up to 32 characters and is case-sensitive.

**SSID Visibility:** Select **Enable** to broadcast the SSID across the network, thus making it visible to all network users. Select **Disable** to hide the SSID from the network.

**Auto Channel Selection:** This feature when enabled automatically selects the channel that provides the best wireless performance. The channel selection process only occurs when the AP is booting up. To manually select a channel, set this option to **Disable** and select a channel from the drop-down menu.

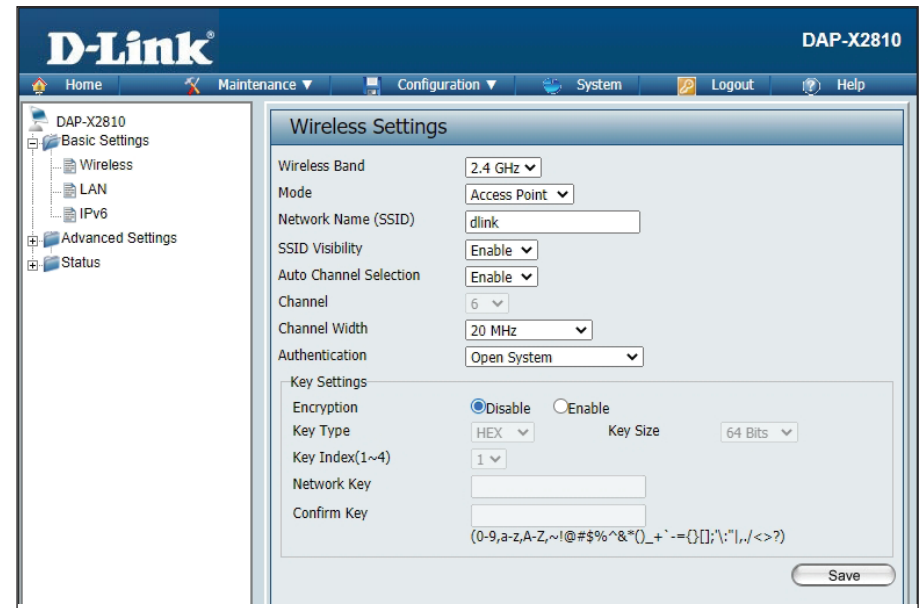

**Channel:** To change the channel, first toggle the *Auto Channel Selection* setting to **Disable**, and then use the drop-down menu to make the desired selection.

**Note:** *The wireless adapters will automatically scan and match the wireless settings.*

**Channel Width:** Allows you to select the channel width you would like to operate in 2.4GHz and 5GHz. Use the drop-down menu to choose **20 MHz** or **Auto 20/40 MHz** or **Auto 20/40/80 MHz**.

**Authentication:** Use the drop-down menu to choose **Open System, Enhanced Open, Enhanced Open + Open, WPA-Personal, WPA-Enterprise, or 802.1x**.

- Select **Open System, Enhanced Open, Enhanced Open or Open**, to communicate the key across the network (WEP).
- Select **WPA-Personal** to secure your network using a password and dynamic key changes. No RADIUS server is required.
- Select **WPA-Enterprise** to secure your network with the inclusion of a RADIUS server.
- Select **802.1X** if your network is using port-based Network Access Control.

## WDS with AP Mode

**Wireless Band:** Select either **2.4GHz** or **5GHz** from the drop-down menu.

**Mode:** WDS with AP mode is selected from the drop-down menu.

**Network Name (SSID):** Service Set Identifier (SSID) is the name designated for a specific wireless local area network (WLAN). The SSID's factory default setting is **dlink**. The SSID can be easily changed to connect to an existing wireless network or to establish a new wireless network.

**Auto Channel Selection:** Enabling this feature automatically selects the channel that will provide the best wireless performance. This feature is not supported in WDS with AP mode. The channel selection process only occurs when the AP is booting up.

**Channel:** All devices on the network must share the same channel. To change the channel, use the drop-down menu to make the desired selection. (Note: The wireless adapters will automatically scan and match the wireless settings.)

**Channel Width:** Allows you to select the channel width you would like to operate in 2.4GHz and 5GHz. Use the drop-down menu to choose 20 MHz or Auto 20/40 MHz or Auto 20/40/80 MHz.

The screenshot shows the D-Link DAP-X2810 configuration interface. The 'Wireless Settings' section is active, displaying the following configuration:

- Wireless Band: 2.4 GHz
- Mode: WDS with AP
- Network Name (SSID): dlink
- Auto Channel Selection: Enable
- Channel: 6
- Channel Width: 20 MHz
- Authentication: Open System
- AP MAC Address: (empty field)

Below the settings is a 'Site Survey' section with a 'Scan' button and a table with the following headers: CH, RSSI, BSSID, Security, and SSID. The table is currently empty.

The 'Key Settings' section at the bottom includes:

- Encryption:  Disable  Enable
- Key Type: HEX
- Key Size: 64 Bits
- Key Index(1~4): 1
- Network Key: (empty field)
- Confirm Key: (empty field)

A 'Save' button is located at the bottom right of the configuration area.

**AP MAC Address:** Enter the MAC addresses of the APs on your network that will serve as bridges to wirelessly connect multiple networks.

**Site Survey:** Click on the **Scan** button to search for available wireless networks, then click on the available network that you want to connect with.

**Authentication:** Use the drop-down menu to choose **Open System** or **WPA-Personal**.

- Select Open System to communicate the key across the network.
- Select WPA-Personal to secure your network using a password and dynamic key changes. No RADIUS server is required.

## WDS Mode

**Wireless Band:** Select either 2.4GHz or 5GHz from the drop-down menu.

**Mode:** WDS is selected from the drop-down menu.

**Network Name (SSID):** Service Set Identifier (SSID) is the name designated for a specific wireless local area network (WLAN). The SSID's factory default setting is **dlink**. The SSID can be easily changed to connect to an existing wireless network or to establish a new wireless network.

**Auto Channel Selection:** Enabling this feature automatically selects the channel that will provide the best wireless performance. This feature is not supported in WDS mode.

**Channel:** All devices on the network must share the same channel. To change the channel, use the drop-down menu to make the desired selection.

**Channel Width:** Allows you to select the channel width you would like to operate in 2.4GHz and 5GHz. Use the drop-down menu to choose 20 MHz or Auto 20/40 MHz or Auto 20/40/80 MHz.

**AP MAC Address:** Enter the MAC addresses of the APs on your network that will serve as bridges to wirelessly connect multiple networks.

The screenshot shows the D-Link DAP-X2810 configuration interface. The top navigation bar includes Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar shows a tree view with Basic Settings (Wireless, LAN, IPv6), Advanced Settings, and Status. The main content area is titled 'Wireless Settings' and contains the following fields:

- Wireless Band: 2.4 GHz
- Mode: WDS
- Network Name (SSID): dlink
- Auto Channel Selection: Enable
- Channel: 6
- Channel Width: 20 MHz
- Authentication: Open System
- AP MAC Address: (empty field)

Below these fields is a 'Site Survey' section with a 'Scan' button and a table with the following headers: CH, RSSI, BSSID, Security, and SSID. The table is currently empty.

At the bottom is a 'Key Settings' section with the following options:

- Encryption:  Disable,  Enable
- Key Type: HEX
- Key Size: 64 Bits
- Key Index(1~4): 1
- Network Key: (empty field)
- Confirm Key: (empty field)

A 'Save' button is located at the bottom right of the configuration area.

**Site Survey:** Click on the **Scan** button to search for available wireless networks, then click on the available network that you want to connect with.

**Authentication:** Use the drop-down menu to choose **Open System** or **WPA-Personal**.

- Select Open System to communicate the key across the network.
- Select WPA-Personal to secure your network using a password and dynamic key changes. No RADIUS server is required.

## Wireless Security

Wireless security is a key concern for any wireless network. Unlike any other networking methods, wireless networks broadcast its presence for anyone to connect to it. Today, wireless security has advanced to a level where it is virtually impenetrable.

There are mainly two forms of wireless encryption and they are called Wired Equivalent Privacy (WEP) and Wi-Fi Protected Access (WPA). WEP was the first security method developed. It is a low level encryption but better than now encryption. WPA is the newest encryption standard and with the advanced WPA3 standard, wireless networks have finally reach a point where the security is strong enough to give users peace of mind when installing wireless networks.

### Wired Equivalent Privacy (WEP)

**WEP Open System** will send a request to the access point and if the key used matches the one configured on the access point, the access point will return a success message back to the wireless client. If the key does not match the one configured on the access point, the access point will deny the connection request from the wireless client.

**Encryption:** Use the radio button to disable or enable encryption.

**Key Type:** Select HEX\*\* or ASCII\*.

**Key Size:** Select 64 Bits or 128 Bits.

**Key Index (1-4):** Select the 1st through the 4th key to be the active key.

**Key:** Input up to four keys for encryption. You will select one of these keys in the Key Index drop-down menu.

\*\*Hexadecimal (HEX) digits consist of the numbers 0-9 and the letters A-F.

\*ASCII (American Standard Code for Information Interchange) is a code that represents English letters using numbers ranging from 0-127.

The screenshot shows the 'Wireless Settings' configuration window. The 'Authentication' dropdown is set to 'Open System'. Under the 'Key Settings' section, the 'Encryption' radio button for 'Disable' is selected. The 'Key Type' is set to 'HEX' and the 'Key Size' is set to '64 Bits'. The 'Key Index(1~4)' dropdown is set to '1'. There are empty text boxes for 'Network Key' and 'Confirm Key'. A 'Save' button is located at the bottom right of the window.

## Wi-Fi Protected Access (WPA / WPA2 / WPA3)

WPA was created by the Wi-Fi Alliance to address the limitations and weaknesses found in WEP. This protocol is mainly based on the 802.11i standard. There are also two variations found in WPA called WPA-Personal (PSK) and WPA-Enterprise (EAP).

WPA-EAP requires the user to install a RADIUS Server on the network for authentication.

WPA-Personal does not require the user to install a RADIUS Server on the network.

Comparing WPA-PSK with WPA-EAP, WPA-PSK is seen as a weaker authentication but comparing WPA-PSK to WEP, WPA-PSK is far more secure than WEP. WPA-EAP is the highest level of wireless security a user can use for wireless today.

WPA2/WPA3 are upgrades of WPA. WPA2/WPA3 yet again solves some possible security issues found in WPA. WPA2/WPA3 have two variations called WPA2/WPA3-Personal (PSK) and WPA2/WPA3-Enterprise (EAP) which are the same as found with WPA.

**WPA Mode:** When WPA-Personal is selected for Authentication type, you must also select a WPA mode from the drop-down menu: AUTO (WPA or WPA2), WPA2 or WPA3, WPA2 Only or WPA3 Only.

**Cipher Type:** When you select WPA-Personal, you must also select AUTO, AES, or TKIP from the drop-down menu.

**Group Key Update:** Select the interval during which the group key will be valid. The default value of 3600 is recommended.

**Pass Phrase:** When you select WPA-Personal, enter a Pass Phrase in the corresponding field.

**Wireless Settings**

Wireless Band: 2.4 GHz

Mode: Access Point

Network Name (SSID): dlink

SSID Visibility: Enable

Auto Channel Selection: Enable

Channel: 6

Channel Width: 20 MHz

Authentication: WPA-Personal

**Passphrase Settings**

WPA Mode: AUTO (WPA or WPA2)

Cipher Type: Auto    Group Key Update Interval: 3600 (Sec)

Manual     Periodical Key Change

Activated From: Sun : 0 : 0

Time Interval: 1 (1~168)hour(s)

passphrase:

Confirm Passphrase:

notice: 8~63 in ASCII or 64 in Hex.  
(0-9,a-z,A-Z,~!@#\$\$%^&\*()\_+`-={}|:;\",./<>?)

Save

**WPA Mode:** When WPA-Enterprise is selected, you must also select a WPA mode from the drop-down menu: AUTO (WPA or WPA2) or WPA2 Only or WPA3 only.

**Cipher Type:** When WPA-Enterprise is selected, you must also select a cipher type from the drop-down menu: Auto, AES, or TKIP.

**Group Key Update Interval:** Select the interval during which the group key will be valid. 3600 is the recommended value as a lower interval may reduce data transfer rates.

**RADIUS Server:** Enter the IP address of the RADIUS server to be used in authenticate.

**RADIUS Port:** Enter the RADIUS port.

**RADIUS Secret:** Enter the shared secret to be used between the radius server and the DAP to authenticate.

**Accounting Mode:** Click the drop-down menu to enable or disable the accounting mode.

**Accounting Server:** Enter the IP address of the accounting server.

**Accounting Port:** Enter the accounting port.

**Accounting Secret:** Enter the accounting secret.

**Save:** Save the updated configuration. Click **Configuration > Save and Activate** to make changes permanent.

### Wireless Settings

Wireless Band	2.4 GHz ▾	
Mode	Access Point ▾	
Network Name (SSID)	dlink	
SSID Visibility	Enable ▾	
Auto Channel Selection	Enable ▾	
Channel	6 ▾	
Channel Width	20 MHz ▾	
Authentication	WPA-Enterprise ▾	
<b>RADIUS Server Settings</b>		
WPA Mode	AUTO (WPA or WPA2) ▾	
Cipher Type	Auto ▾	Group Key Update Interval <input type="text" value="3600"/> (Sec)
<b>RADIUS Server Mode</b>		
RADIUS Server	<input checked="" type="radio"/> External <input type="radio"/> Internal	
<b>Primary RADIUS Server Setting</b>		
RADIUS Server	<input type="text"/>	RADIUS Port <input type="text" value="1812"/>
RADIUS Secret	<input type="text"/> <small>(0-9,a-z,A-Z,~!@#\$\$%^&amp;*()_+`-={} :~\ ,./&lt;&gt;?)</small>	
<b>Backup RADIUS Server Setting (Optional)</b>		
RADIUS Server	<input type="text"/>	RADIUS Port <input type="text" value="1812"/>
RADIUS Secret	<input type="text"/> <small>(0-9,a-z,A-Z,~!@#\$\$%^&amp;*()_+`-={} :~\ ,./&lt;&gt;?)</small>	
<b>Primary Accounting Server Setting</b>		
Accounting Mode	Disable ▾	
Accounting Server	<input type="text"/>	Accounting Port <input type="text" value="1813"/>
Accounting Secret	<input type="text"/> <small>(0-9,a-z,A-Z,~!@#\$\$%^&amp;*()_+`-={} :~\ ,./&lt;&gt;?)</small>	
<b>Backup Accounting Server Setting (Optional)</b>		
Accounting Server	<input type="text"/>	Accounting Port <input type="text" value="1813"/>
Accounting Secret	<input type="text"/> <small>(0-9,a-z,A-Z,~!@#\$\$%^&amp;*()_+`-={} :~\ ,./&lt;&gt;?)</small>	
<input type="button" value="Save"/>		

## LAN

LAN is short for Local Area Network. This is considered your internal network. These are the IP settings of the LAN interface for the DAP-X2810. These settings may be referred to as private settings. You may change the LAN IP address if needed. The LAN IP address is private to your internal network and cannot be seen on the Internet.

**Get IP From:** **Dynamic IP (DHCP)** is chosen here. Choose this option if you have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When **Dynamic IP (DHCP)** is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Default Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

LAN Settings	
Get IP From	Dynamic IP (DHCP) ▼
IP Address	192.168.0.100
Subnet Mask	255.255.255.0
Default Gateway	192.168.0.1
DNS	192.168.0.1

Save

## IPv6


**Enable IPv6:** Check to enable IPv6

**Get IP From:** Dynamic IP is chosen here. Choose this option the DAP-X2810 can get IPv6 address automatically or use Static to set IPv6 address manually.  
When **Auto** is selected, the other fields here will be grayed out.

**IPv6 Address:** Enter the LAN IPv6 address used here.

**Prefix:** Enter the LAN subnet prefix length value used here.

**Default Gateway:** Enter the LAN default gateway IPv6 address used here.

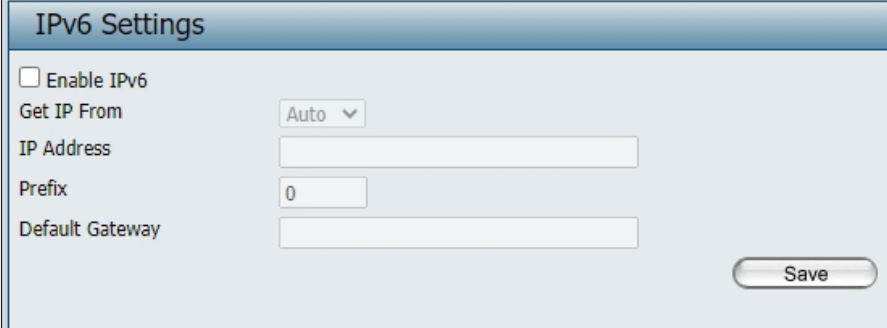


The screenshot shows a configuration window titled "IPv6 Settings". It contains the following elements:

- An unchecked checkbox labeled "Enable IPv6".
- A "Get IP From" dropdown menu currently set to "Auto".
- An "IP Address" text input field.
- A "Prefix" text input field containing the value "0".
- A "Default Gateway" text input field.
- A "Save" button located in the bottom right corner.

# Advanced Settings

In the Advanced Settings Section the user can configure advanced settings concerning Performance, Wireless Resource, Multi-SSID, VLAN, Intrusion, Schedule, Internal RADIUS Server, ARP Spoofing Prevention, Bandwidth Optimization, Captive Portal, DHCP Server, Filters and Traffic Control. The following pages will explain settings found in the Advanced Settings section in more detail.

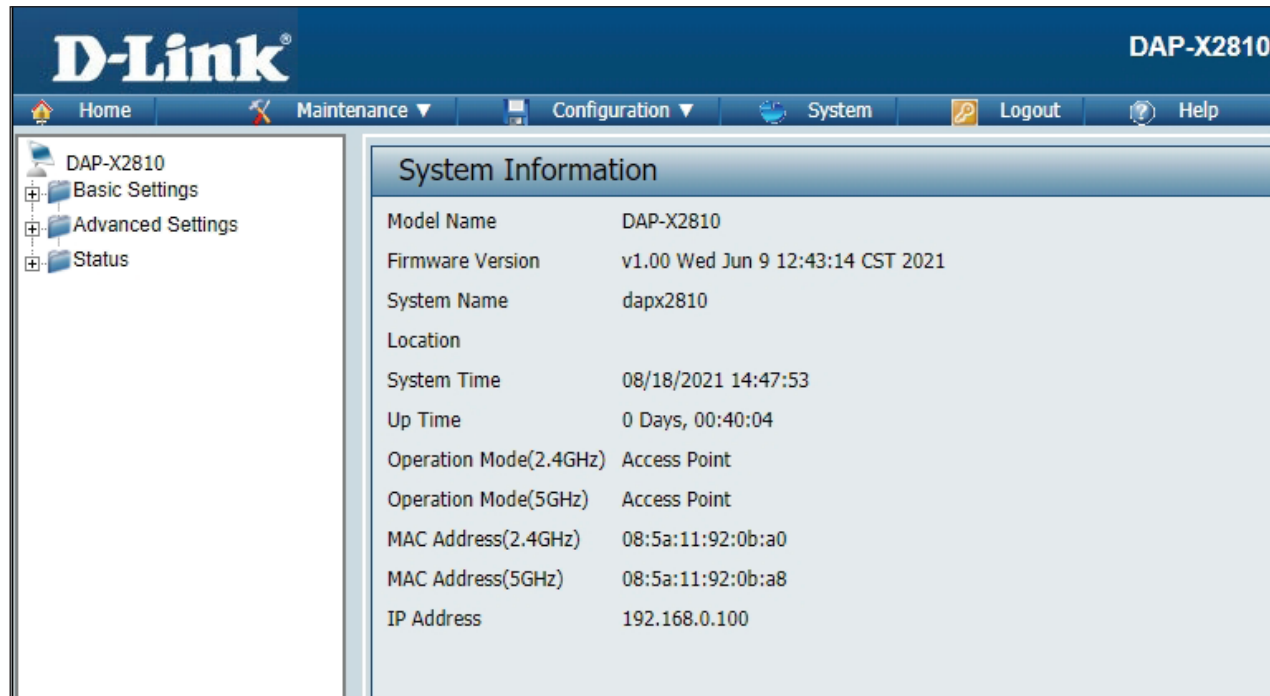

The screenshot displays the D-Link DAP-X2810 web interface. The top navigation bar includes links for Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar shows a tree view with 'DAP-X2810' expanded, containing 'Basic Settings', 'Advanced Settings', and 'Status'. The main content area is titled 'System Information' and lists the following details:

Model Name	DAP-X2810
Firmware Version	v1.00 Wed Jun 9 12:43:14 CST 2021
System Name	dapx2810
Location	
System Time	08/18/2021 14:47:53
Up Time	0 Days, 00:40:04
Operation Mode(2.4GHz)	Access Point
Operation Mode(5GHz)	Access Point
MAC Address(2.4GHz)	08:5a:11:92:0b:a0
MAC Address(5GHz)	08:5a:11:92:0b:a8
IP Address	192.168.0.100

## Performance

On the Performance Settings page the users can configure more advanced settings concerning the wireless signal and hosting.

**Wireless Band:** Select either 2.4GHz or 5GHz.

**Wireless:** Use the drop-down menu to turn the wireless function On or Off.

**Wireless Mode:** The different combination of clients that can be supported include Mixed 802.11b/g/n mode, Mixed 802.11b/g mode, 802.11n Only mode, and Mixed 802.11ax mode in the 2.4 GHz band and Mixed 802.11a/n, 802.11a Only mode, 802.11n Only mode, Mixed 802.11ac mode and Mixed 802.11ax mode in the 5 GHz band. Please note that when backwards compatibility is enabled for legacy (802.11a/g/b) clients, degradation of 802.11n wireless performance is expected.

**Data Rate\*:** Indicate the base transfer rate of wireless adapters on the wireless LAN. The AP will adjust the base transfer rate depending on the base rate of the connected device. If there are obstacles or interference, the AP will step down the rate. This option is enabled in Mixed 802.11 b/g mode (for 2.4 GHz) and 802.11a only mode (for 5 GHz). The choices available are Best (Up to 54), 54, 48, 36, 24, 18, 12, 9, 6 for 5 GHz and Best (Up to 54), 54, 48, 36, 24, 18, 12, 9, 6, 11, 5.5, 2 or 1 for 2.4 GHz.

**Beacon Interval (40-500):** Beacons are packets sent by an access point to synchronize a wireless network. Specify a value in milliseconds. The default (100) is recommended. Setting a higher beacon interval can help to save the power of wireless clients, while setting a lower one can help a wireless client connect to an access point faster.

**DTM Interval (1-15):** Select a Delivery Traffic Indication Message setting between 1 and 15. 1 is the default setting. DTIM is a countdown informing clients of the next window for listening to broadcast and multicast messages.

Performance Settings	
Wireless band	2.4 GHz
Wireless	On
Wireless Mode	Mixed 802.11ax mode
Data Rate	Best(up to 574) (Mbps)
Beacon Interval (40-500)	100
DTIM Interval (1-15)	1
Transmit Power	100%
WMM (Wi-Fi Multimedia)	Enable
Ack Time Out (2.4GHz, 64~200)	64 (us)
Short GI	Disable
IGMP Snooping	Disable
Multicast Rate	Disable
Multicast Bandwidth Control	Disable
Maximum Multicast Bandwidth	100 kbps
HT20/40 Coexistence	Enable
Transfer DHCP Offer to Unicast	Enable

**Transmit Power:** This setting determines the power level of the wireless transmission. Transmitting power can be adjusted to eliminate overlapping of wireless area coverage between two access points where interference is a major concern. For example, if wireless coverage is intended for half of the area, then select 50% as the option. Use the drop-down menu to select 100%, 50%, 25%, or 12.5%.

**WMM (Wi-Fi Multimedia):** WMM stands for Wi-Fi Multimedia. Enabling this feature will improve the user experience for audio and video applications over a Wi-Fi network. This setting only available when legacy client ([802.11a only mode][Mixed b/g mode]) is selected.

**Ack Time Out:** To effectively optimize throughput over long distance links enter a value for Acknowledgement Time Out between 64 and 200 microseconds for 5 GHz and 2.4 GHz in the field provided.

**Short GI:** Select Enable or Disable. Enabling a short guard interval can increase throughput. However, be aware that it can also increase the error rate in some installations due to increased sensitivity to radio-frequency installations. This setting not available when legacy client ([802.11a only mode][Mixed b/g mode]) is selected.

**IGMP Snooping:** Select Enable or Disable. Internet Group Management Protocol allows the AP to recognize IGMP queries and reports sent between routers and an IGMP host (wireless STA). When IGMP snooping is enabled, the AP will forward multicast packets to an IGMP host based on IGMP messages passing through the AP. This setting not available when WDS mode is enabled.

**Multicast Rate:** Select the multicast rate to adjust multicast packet data rates. This setting only available when [Mixed b/g/n mode][Mixed b/g mode][Mixed a/n mode][802.11a only mode] is selected

**Multicast BandwidthControl:** Adjust the multicast packet data rate here. The Multicast Bandwidth Control is supported in AP mode, (2.4 GHz and 5 GHz) and WDS with AP mode, including Multi-SSIDs. This setting not available when WDS mode is enabled.

**Maximum Multicast Bandwidth:** Set the multicast packets' maximum bandwidth pass through rate from the Ethernet interface to the Access Point.

**HT20/40 Coexistence:** Enable this option to reduce interference from other wireless networks in your area. If the channel width is operating at 40 MHz and there is another wireless network's channel overlapping and causing interference, the Access Point will automatically change to 20 MHz.

**Transfer DHCP Offer to Unicast:** Enable to transfer the DHCP Offer to Unicast from LAN to WLAN. It is suggested to enable this function if stations number is larger than 30.

---

## Wireless Resource

The Wireless Resource Control window is used to configure the wireless connection settings so that the device can detect the better wireless connection in your environment.

**Airtime Fairness:** Click the drop-down menu to enable or disable the airtime fairness function.

**Band Steering:** Click the drop-down menu to enable the band steering function. When the wireless clients support both 2.4GHz and 5GHz and the 2.4GHz signal is not strong enough, the device will use 5GHz as higher priority.

**Wireless Band:** Click the drop-down menu to select the wireless band, 2.4GHz or 5GHz.

**Connection Limit:** Click the drop-down menu to enable or disable the connection limit function. The option is for load balancing. This determines whether to limit the number of users accessing this device. The exact number is entered in the User Limit field below. This feature allows the user to share the wireless network traffic and the client using multiple APs. If this function is enabled and when the number of users exceeds this value, or the network utilization of this AP exceeds the percentage that has been specified, the DAP-X2810 will not allow clients to associate with the AP.

**User Limit (0 - 128):** This function is only available when Connection Limit is enabled. Set the maximum amount of users that are allowed access (0 - 128 users) to the device using the specified wireless band.

The screenshot shows the 'Wireless Resource Control' window with the following settings:

Setting	Value
Airtime Fairness	Disable
Band Steering	Disable
Wireless band	2.4 GHz
Connection Limit	Disable
User Limit (0 - 128)	20
11n/ax Preferred	Disable
Network Utilization	100%
Aging out	Disable
RSSI Threshold	100%
Data Rate Threshold	54
ACL RSSI	Disable
ACL RSSI Threshold	60%

A 'Save' button is located at the bottom right of the window.

- 
- 11n Preferred:** This function is only available when Connection Limit is enabled. Use the drop-down menu to enable the 11n Preferred function. The wireless clients with 802.11n protocol will have higher priority to connect to the device.
- Network Utilization:** Click the drop-down menu to set the maximum utilization of this access point for service. The DAP-X2810 will not allow any new clients to associate with the AP if the utilization exceeds the value the user specifies. When this network utilization threshold is reached, the device will pause for one minute to allow network congestion to dissipate.
- Aging out:** Use the drop-down menu to select the criteria for disconnecting the wireless clients.
- RSSI Threshold:** When **Aging out** is **RSSI**, click the drop-down menu to select the percentage of RSSI. When the RSSI of wireless clients is lower than the specified percentage, the device disconnects the wireless clients. The function is only available when **Aging out** is **RSSI**.
- Data Rate Threshold:** When **Aging out** is **Data Rate**, click the drop-down menu to select the threshold of data rate. When the data rate of wireless clients is lower than the specified number, the device disconnects the wireless clients. The function is only available when **Aging out** is **Data Rate**.
- ACL RSSI:** Click the drop-down menu to enable the ACL RSSI function. When enabled, the device denies the connection request from the wireless clients with the RSSI lower than the specified threshold below.
- ACL RSSI Threshold:** Click the drop-down menu to set the ACL RSSI Threshold.
- Save:** Click to save the updated configuration. To make the updates permanent, click **Configuration > Save and Activate**.

## Multi-SSID

The device supports up to eight multiple Service Set Identifiers. You can set the Primary SSID in the Basic > Wireless section. The SSID's factory default setting is dlink. The SSID can be easily changed to connect to an existing wireless network or to establish a new wireless network.

**Enable Multi-SSID:** Check to enable support for multiple SSIDs.

**Enable Priority:** Check to enable the Priority function.

**Band:** Select **2.4GHz** or **5GHz**.

**Index:** You can select up to seven multi-SSIDs. With the Primary SSID, you have a total of eight multi-SSIDs.

**SSID:** Service Set Identifier (SSID) is the name designated for a specific wireless local area network (WLAN). The SSID's factory default setting is **dlink**. The SSID can be easily changed to connect to an existing wireless network or to establish a new wireless network.

**SSID Visibility:** Enable or Disable SSID visibility. Enabling this feature broadcasts the SSID across the network, thus making it visible to all network users.

**Security:** The Multi-SSID security can be Open System, WPA-Personal, or WPA-Enterprise.

For a detailed description of the Open System parameters please go to pages 17. For a detailed description of the WPA-Personal parameters please go to page 18. For a detailed description of the WPA-Enterprise parameters please go to page 19.

**Priority:** Select the priority level of the SSID selected.

**WMM (Wi-Fi Multimedia):** WMM stands for Wi-Fi Multimedia. Enabling this feature will improve the user experience for audio and video applications over a Wi-Fi network.

**Multi-SSID Settings**

Enable Multi-SSID  Enable Priority

**Wireless Settings**

Band: 2.4 GHz

Index: Primary SSID

SSID: dlink

SSID Visibility: Enable

Security: Open System

Priority: 0

WMM (Wi-Fi Multimedia): Enable

**Key Settings**

Encryption:  Disable  Enable

Key Type: HEX Key Size: 64 Bits

Key Index(1~4): 1

Network Key:

Confirm Key:

(0-9,a-z,A-Z,~!@#%&\*()\_+`-={[];^:~|,./<>?)

Add

Index	SSID	Band	Encryption	Delete
Primary SSID	dlink	2.4 GHz	None	

Save

**Encryption:** When you select Open System, toggle between Enable and Disable. If Enable is selected, the Key Type, Key Size, Key Index (1~4), Key, and Confirm Keys must also be configured.

**Key Type:** Select HEX or ASCII.

**Key Size:** Select 64-bit or 128-bit.

**Key Index (1-4):** Select from the 1st to 4th key to be set as the active key.

**Key:** Input up to four keys for encryption. You will select one of these keys in the Key Index drop-down menu.

**WPA Mode:** When you select either WPA-Personal or WPA-Enterprise, you must also choose a WPA mode from the drop-down menu.

**Cipher Type:** Select Auto, AES, or TKIP from the drop-down menu.

**Group Key Update Interval:** Select the interval during which the group key will be valid. The default value of 3600 seconds is recommended.

**Pass Phrase:** When you select WPA-Personal, please enter a Pass Phrase in the corresponding field.

**Confirm Pass Phrase:** When you select WPA-Personal, please re-enter the Pass Phrase entered in the previous item in the corresponding field.

**RADIUS Server:** When you select WPA-Enterprise, enter the IP address of the RADIUS server. In addition, you must configure RADIUS Port and RADIUS Secret.

**RADIUS Port:** Enter the RADIUS port.

**RADIUS Secret:** Enter the RADIUS secret.

**Accounting Mode:** Click the drop-down menu to enable or disable the accounting mode.

**Accounting Server:** Enter the IP address of the accounting server.

# VLAN

## VLAN List

The DAP-X2810 supports VLANs. VLANs can be created with a Name and VID. Mgmt (TCP stack), LAN, Primary/Multiple SSID, and WDS connection can be assigned to VLANs as they are physical ports. Any packet which enters the DAP-X2810 without a VLAN tag will have a VLAN tag inserted with a PVID. The VLAN List tab displays the current VLANs.

**VLAN Status:** Use the radio button to toggle to Enable. Next, go to the Add/Edit VLAN tab to add or modify an item on the VLAN List tab.

**VLAN Mode:** The current VLAN mode is displayed.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

**VID:** Displays the VID of the VLAN.

**VLAN Name:** Displays the name of the VLAN.

**Untag VLAN Ports** Displays the untagged ports.

**Tag VLAN Ports:** Displays the tagged ports.

**Edit:** Click the icon to edit the current VLAN.

**Delete:** Click the icon to delete the current VLAN.

**VLAN Settings**

VLAN Status  Disable  Enable

VLAN Mode Static(2.4 GHz) Static(5 GHz)

VID	VLAN Name	Untag VLAN Ports	Tag VLAN Ports	Edit	Delete
1	default	Mgmt, LAN, Primary(2.4 GHz), S-1(2.4 GHz), S-2(2.4 GHz), S-3(2.4 GHz), S-4(2.4 GHz), S-5(2.4 GHz), S-6(2.4 GHz), S-7(2.4 GHz), Primary(5 GHz), S-1(5 GHz), S-2(5 GHz), S-3(5 GHz), S-4(5 GHz), S-5(5 GHz), S-6(5 GHz), S-7(5 GHz)			

## Port List

The Port List tab displays the current ports. If you want to configure the guest and internal networks on a Virtual LAN (VLAN), the switch and DHCP server you are using must also support VLANs. As a prerequisite step, configure a port on the switch for handling VLAN tagged packets as described in the IEEE 802.1Q standard.

**VLAN Status:** Use the radio button to toggle to Enable. Next, go to the Add/Edit VLAN tab to add or modify an item on the VLAN List tab.

**VLAN Mode:** Displays the current VLAN mode.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

**Port Name:** The name of the port is displayed in this column.

**Tag VID:** The Tagged VID is displayed in this column.

**Untag VID:** The Untagged VID is displayed in this column.

**PVID:** The Port VLAN Identifier is displayed in this column.

VLAN Settings			
VLAN Status <input checked="" type="radio"/> Disable <input type="radio"/> Enable <input type="button" value="Save"/>			
VLAN Mode <input type="radio"/> Static(2.4 GHz) <input type="radio"/> Static(5 GHz)			
VLAN List	Port List	Add/Edit VLAN	PVID Setting
Port Name	Tag VID	Untag VID	PVID
Mgmt		1	1
LAN		1	1
Primary(2.4 GHz)		1	1
S-1(2.4 GHz)		1	1
S-2(2.4 GHz)		1	1
S-3(2.4 GHz)		1	1
S-4(2.4 GHz)		1	1
S-5(2.4 GHz)		1	1
S-6(2.4 GHz)		1	1
S-7(2.4 GHz)		1	1
Primary(5 GHz)		1	1
S-1(5 GHz)		1	1
S-2(5 GHz)		1	1
S-3(5 GHz)		1	1
S-4(5 GHz)		1	1
S-5(5 GHz)		1	1
S-6(5 GHz)		1	1
S-7(5 GHz)		1	1

## Add/Edit VLAN

The Add/Edit VLAN tab is used to configure VLANs. Once you have made the desired changes, click the Save button to let your changes take effect.

**VLAN Status:** Use the radio button to toggle to Enable.

**VLAN Mode:** Displays the current VLAN mode.

**VLAN ID:** Provide a number between 1 and 4094 for the Internal VLAN.

**VLAN Name:** Enter the VLAN to add or modify.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

### VLAN Settings

VLAN Status  Disable  Enable Save

VLAN Mode  Static(2.4 GHz)  Static(5 GHz)

VLAN List
Port List
Add/Edit VLAN
PVID Setting

VLAN ID (VID)  VLAN Name

Port	Select All	Mgmt	LAN
Untag	All	<input type="radio"/>	<input type="radio"/>
Tag	All	<input type="radio"/>	<input type="radio"/>
Not Member	All	<input type="radio"/>	<input type="radio"/>

2.4 GHz

MSSID Port	Select All	Primary	S-1	S-2	S-3	S-4	S-5	S-6	S-7
Untag	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Tag	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Not Member	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

5 GHz

MSSID Port	Select All	Primary	S-1	S-2	S-3	S-4	S-5	S-6	S-7
Untag	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Tag	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Not Member	All	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Save

## PVID Settings

The PVID Setting tab is used to enable/disable the Port VLAN Identifier Auto Assign Status as well as to configure various types of PVID settings. Click the Save button to let your changes take effect.

**VLAN Status:** Use the radio button to toggle between Enable and Disable.

**VLAN Mode:** Displays the current VLAN mode.

**PVID Auto Assign Status:** Use the radio button to toggle PVID auto assign status to Enable.

**VLAN Settings**

VLAN Status  Disable  Enable

VLAN Mode Static(2.4 GHz) Static(5 GHz)

VLAN List Port List Add/Edit VLAN **PVID Setting**

PVID Auto Assign Status  Disable  Enable

Port	Mgmt	LAN						
PVID	1	1						

2.4 GHz

MSSID	Primary Port	S-1	S-2	S-3	S-4	S-5	S-6	S-7
PVID	1	1	1	1	1	1	1	1

5 GHz

MSSID	Primary Port	S-1	S-2	S-3	S-4	S-5	S-6	S-7
PVID	1	1	1	1	1	1	1	1

## Intrusion

The Wireless Intrusion Protection window is used to set APs as All, Valid, Neighborhood, Rogue, and New. Click the Save button to let your changes take effect.

**Wireless Band:** Select 2.4GHz or 5GHz.

**AP List:** Click the drop-down menu to select **All**, **Valid**, **Neighbor**, **Rogue**, and **New**.

The following is a definition of the listed AP categories:

- **Valid:** An AP which is authenticated to the network with encryption is classified as valid.
- **Neighbor:** A detected AP with a weak signal strength is classified as a suspect neighbor.
- **Rogue:** An AP that has been installed on the secure network without explicit authorization.
- **New:** An alternative category.

From the AP List select a detected AP and click **Set as Valid**, **Set as Neighborhood**, **Set as Rogue**, or **Set as New** to manually define the category type for the AP. Alternatively, click the radio button to mark all new access points as valid or rogue.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

Wireless Intrusion Protection

Wireless Band: 2.4 GHz

Detect

AP List

All

Type	Band	CH	SSID	BSSID	Last Seen	Status
------	------	----	------	-------	-----------	--------

Set as Valid Set as Neighborhood Set as Rogue Set as New

Mark All New Access Points as Valid Access Points  
 Mark All New Access Points as Rogue Access Points

Save

## Schedule

The Wireless Schedule Settings window is used to add and modify scheduling rules on the device. Click the Save button to let your changes take effect.

**Wireless Schedule:** Use the drop-down menu to enable the device's scheduling feature.

**Name:** Enter a name for the new scheduling rule in the field provided.

**Index:** Use the drop-down menu to select the desired SSID.

**SSID:** This read-only field indicates the current SSID in use. To create a new SSID, go to the Wireless Settings window (Basic Settings > **Wireless**).

**Day(s):** Toggle the radio button between All Week and Select Day(s). If the second option is selected, check the specific days you want the rule to be effective on.

**All Day(s):** Check this box to have your settings apply 24 hours a day.

**Start Time:** Enter the beginning hour and minute, using a 24-hour clock.

**End Time:** Enter the ending hour and minute, using a 24-hour clock.

Wireless Schedule Settings

Wireless Schedule

**Add Schedule Rule**

Name

Index

SSID

Day(s)  All Week  Select Day(s)

Sun  Mon  Tue  Wed  Thu  Fri  Sat

All Day(s)

Start Time  :  hour:minute, 24 hour time

End Time  :  hour:minute, 24 hour time  Overnight

**Schedule Rule List**

Name	SSID Index	SSID	Day(s)	Time Frame	Wireless	Edit	Del
+: To the end time of the next day overnight.							

## Internal RADIUS Server


The DAP-X2810 features a built-in RADIUS server. Once you have finished adding a RADIUS account, click the Save button to let your changes take effect. The newly-created account will appear in this RADIUS Account List. The radio buttons allow the user to enable or disable the RADIUS account. Click the icon in the delete column to remove the RADIUS account. We suggest you limit the number of accounts below 30.

**User Name:** Enter a name to authenticate user access to the internal RADIUS server.

**Password:** Enter a password to authenticate user access to the internal RADIUS server. The length of your password should be 8~64.

**Status:** Toggle the drop-down menu between Enable and Disable.

**RADIUS Account List:** Displays the list of users.

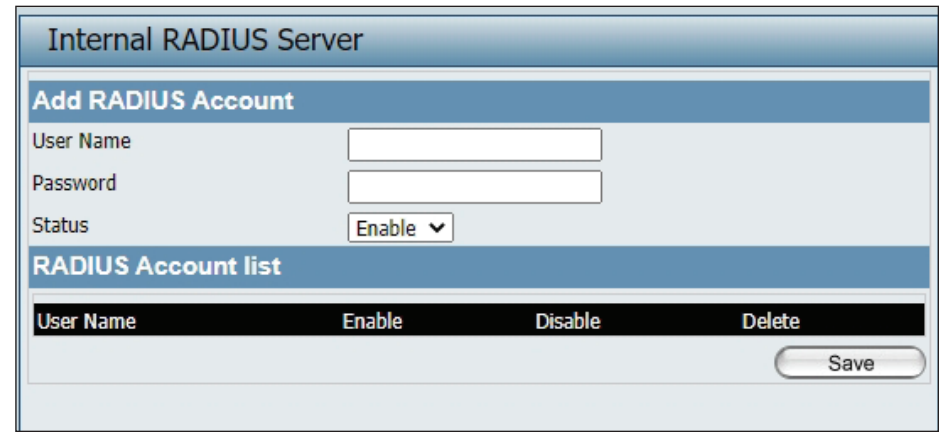

The screenshot shows the 'Internal RADIUS Server' configuration page. It features a header 'Internal RADIUS Server' and a section titled 'Add RADIUS Account'. This section contains three input fields: 'User Name' (a text box), 'Password' (a text box), and 'Status' (a dropdown menu currently set to 'Enable'). Below this is a section titled 'RADIUS Account list' which contains a table with four columns: 'User Name', 'Enable', 'Disable', and 'Delete'. The table is currently empty. A 'Save' button is located at the bottom right of the form.

## ARP Spoofing Prevention

The ARP Spoofing Prevention feature allows users to add IP/MAC address mapping to prevent ARP spoofing attacks.

**ARP Spoofing Prevention:** This drop-down allows you to enable the ARP spoofing prevention function.

**Add:** Click to create a defined rule.

**Clear:** Click to clear a defined rule.

**Gateway IP Address:** Enter a gateway IP address.

**Gateway MAC Address:** Enter a gateway MAC address.

**Delete All:** Click to delete all gateway entries.

**Edit:** Click to edit the selected gateway entry.

**Delete:** Click to delete the gateway entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'ARP Spoofing Prevention Settings' window. At the top, there is a title bar. Below it, the text 'ARP Spoofing Prevention' is followed by a dropdown menu currently set to 'Disable'. The main area is divided into two sections. The first section, 'Add Gateway Address', contains two input fields: 'Gateway IP Address' and 'Gate MAC Address'. The 'Gate MAC Address' field is split into six individual boxes separated by colons. Below these fields are 'Add' and 'Clear' buttons. The second section, 'Gateway Address List', shows 'Total Entries 0' and a 'Delete All' button. At the bottom of the window, there is a table header with columns 'Gateway IP Address', 'Gate MAC Address', 'Edit', and 'Delete'. A 'Save' button is located at the bottom right of the window.

## Bandwidth Optimization

The Bandwidth Optimization window allows the user to manage the bandwidth of the device and arrange the bandwidth for various wireless clients. When the Bandwidth Optimization rule is finished, click the **Add** button. To discard the Add Bandwidth Optimization Rule settings, click the **Clear** button. Click the **Save** button to let your changes take effect.

**Enable Bandwidth Optimization:** Use the drop-down menu to Enable the Bandwidth Optimization function.

**Downlink Bandwidth:** Enter the downlink bandwidth of the device in Mbits per second.

**Uplink Bandwidth:** Enter the uplink bandwidth of the device in Mbits per second.

**Allocate average BW for each station:** AP will distribute average bandwidth for each client.

**Allocate maximum BW for each station:** Specify the maximum bandwidth for each connected client. Reserve certain bandwidth for future clients.

**Allocate different BW for a/b/g/n stations:** The weight of 11b/g/n and 11a/n client are 10%/20%/70% and 20%/80%. AP will distribute different bandwidth for 11a/b/g/n clients.

**Allocate specific BW for SSID:** All clients share the total bandwidth.

**Rule Type:** Use the drop-down menu to select the type that is applied to the rule. Available options are: **Allocate average BW for each station**, **Allocate maximum BW for each station**, **Allocate different BW for 1a/b/g/n stations**, and **Allocate specific BW for SSID**.

**Band:** Use the drop-down menu to toggle the wireless band between 2.4GHz and 5GHz.

**SSID Index:** Use the drop-down menu to select the SSID for the specified wireless band.

**Downlink Speed:** Enter the limitation of the downloading speed in either Kbits/sec or Mbits/sec for the rule.

**Uplink Speed:** Enter the limitation of the uploading speed in either Kbits/sec or Mbits/sec for the rule.

**Add:** Click to create a defined rule.

**Clear:** Click to remove the settings from the menu interface.

**Edit:** Click to edit the selected gateway entry.

**Delete:** Click to delete the gateway entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate.**

## Captive Portal

### Authentication Settings-Web Redirection Only

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting Web Redirection Only as the Authentication Type, we can configure the redirection website URL that will be applied to each wireless client in this network.

**Idle Timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:**  
Select 2.4GHz or 5GHz.

**SSID Index:**  
Select the SSID for this Authentication.

**Authentication Type:**  
Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the Web Redirection option.

**Web Redirection State:**  
The default setting is Enable when you select **Web Redirection Only**.

**URL Path:**  
Select whether to use either HTTP or HTTPS here. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:**  
Select to **Enable** or **Disable** the Captive Portal with its IP interface feature here.

**VLAN Group:**  
Enter the VLAN Group ID here.

**Get IP From:**

### Captive Portal Authentication

Idle Timeout (1-1440)	<input type="text" value="60"/>	Minute(s)
Band	<input type="button" value="2.4 GHz"/>	
SSID Index	<input type="button" value="Primary SSID"/>	
Authentication Type	<input type="button" value="Web Redirection Only"/>	
Web Redirection Interface Settings		
Web Redirection State	<input type="button" value="Enable"/>	
URL Path	<input type="button" value="http://"/> <input style="width: 150px;" type="text"/>	
<b>IP Interface Settings</b>		
IPIF Status	<input type="button" value="Disable"/>	
VLAN Group	<input style="width: 150px;" type="text"/>	
Get IP From	<input type="button" value="Static IP(Manual)"/>	
IP Address	<input style="width: 150px;" type="text"/>	
Subnet Mask	<input style="width: 150px;" type="text"/>	
Gateway	<input style="width: 150px;" type="text"/>	
DNS	<input style="width: 150px;" type="text"/>	
<input type="button" value="Save"/>		

Band	SSID Index	Captive Profile	Edit	Delete
------	------------	-----------------	------	--------

Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:**

Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:**

Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Edit:** Click to edit the selected entry.

**Delete:** Click to delete the entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

## Authentication Settings- Username/Password

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting Username/Password as the Authentication Type, we can configure the Username/Password authentication that will be applied to each wireless client in this network.

**Session timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:** Select 2.4GHz or 5GHz.

**SSID Index:** Select the SSID for this Authentication.

**Authentication Type:** Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the Username/Password option.

**Web Redirection State:** Disable is default setting. Select Enable to enable the website redirection feature.

**URL Path:** Select whether to use HTTP or HTTPS. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:** Select to Enable or Disable the Captive Portal with its IP interface feature here.

**VLAN Group:** Enter the VLAN Group ID here.

The screenshot shows the 'Captive Portal Authentication' configuration interface. It is divided into three main sections:

- Web Redirection Interface Settings:**
  - Web Redirection State:
  - URL Path:
- IP Interface Settings:**
  - IPIF Status:
  - VLAN Group:
  - Get IP From:
  - IP Address:
  - Subnet Mask:
  - Gateway:
  - DNS:
- Username/Password Settings:**
  - Username:
  - Password:
  - 
  - Table with columns: Username, Edit, Delete

A  button is located at the bottom right of the configuration area.

**Get IP From:** Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Username:** Enter the username for the new account here.

**Password:** Enter the password for the new account here.

**Add:** Click to create a defined rule.

**Clear:** Click to remove the settings from the menu interface.

**Edit:** Click to edit the selected gateway entry.

**Delete:** Click to delete the gateway entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

## Authentication Settings- Passcode

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting Passcode as the Authentication Type, you can configure the Passcode authentication that will be applied to each wireless client in this network.

**Session timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:** Select 2.4GHz or 5GHz.

**SSID Index:** Select the SSID for this Authentication.

**Authentication Type:** Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the Passcode option.

**Web Redirection State:** The default setting is Disable. Select Enable to enable the website redirection feature.

**URL Path:** Select whether to use HTTP or HTTPS here. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:** Select to Enable or Disable the Captive Portal with its IP interface feature here.

**VLAN Group:** Enter the VLAN Group ID here.

### Captive Portal Authentication

Idle Timeout (1-1440)	<input type="text" value="60"/>	Minute(s)
Band	<input type="text" value="2.4 GHz"/>	
SSID Index	<input type="text" value="Primary SSID"/>	
Authentication Type	<input type="text" value="Passcode"/>	
Web Redirection Interface Settings		
Web Redirection State	<input type="text" value="Disable"/>	
URL Path	<input type="text" value="http://"/>	
IP Interface Settings		
IPIF Status	<input type="text" value="Disable"/>	
VLAN Group	<input type="text"/>	
Get IP From	<input type="text" value="Static IP(Manual)"/>	
IP Address	<input type="text"/>	
Subnet Mask	<input type="text"/>	
Gateway	<input type="text"/>	
DNS	<input type="text"/>	
Passcode Settings		
Passcode Quantity	<input type="text"/>	
Duration	<input type="text"/>	Hour
Last Active Time	Year <input type="text" value="2021"/> Month <input type="text" value="Jan"/> Day <input type="text" value="1"/>	
	Hour <input type="text" value="1:00"/>	
User Limit	<input type="text"/>	
	<input type="button" value="Add"/> <input type="button" value="Clear"/>	
	<input type="button" value="Delete All"/>	
Passcode	Duration	Last Active Time
User Limit	<input type="button" value="Delete"/>	
<input type="button" value="Save"/>		
Band	SSID Index	Captive Profile
Edit	<input type="button" value="Delete"/>	

**Get IP From:** Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Passcode Quantity:** Enter the number of ticket that will be used here.

**Duration:** Enter the duration value, in hours, for this passcode.

**Last Active Day:** Select the last active date for this passcode here. Year, Month and Day selections can be made.

**User Limit:** Enter the maximum amount of users that can use this passcode at the same time

**Add:** Click to create a defined rule.

**Clear:** Click to remove the settings from the menu interface.

**Delete All:** Click to delete all passcode setting entries

**Edit:** Click to edit the selected entry.

**Delete:** Click to delete the entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate.**

## Authentication Settings- Remote RADIUS

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting Remote RADIUS as the Authentication Type, you can configure the Remote RADIUS authentication that will be applied to each wireless client in this network.

**Session timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:** Select 2.4GHz or 5GHz.

**SSID Index:** Select the SSID for this Authentication.

**Authentication Type:** Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the Remote RADIUS option.

**Web Redirection State:** The default setting is Disable. Select Enable to enable the website redirection feature.

**URL Path:** Select whether to use either HTTP or HTTPS here. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:** Select to Enable or Disable the Captive Portal with its IP interface feature here.

**VLAN Group:** Enter the VLAN Group ID here.

**Captive Portal Authentication**

Idle Timeout (1-1440)  Minute(s)

Band

SSID Index

Authentication Type

**Web Redirection Interface Settings**

Web Redirection State

URL Path

**IP Interface Settings**

IPIF Status

VLAN Group

Get IP From

IP Address

Subnet Mask

Gateway

DNS

**Remote RADIUS Settings**

**Radius Server Settings**

Radius Server  Radius Port

Radius Secret

Remote RADIUS Type

**Secondary radius Server Settings**

Radius Server  Radius Port

Radius Secret

Remote RADIUS Type

**Third radius Server Settings**

Radius Server  Radius Port

Radius Secret

Remote RADIUS Type

**Band** **SSID Index** **Captive Profile** **Edit** **Delete**

**Get IP From:** Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Radius Server:** Enter the RADIUS server's IP address here

**Radius Port:** Enter the RADIUS server's port number here

**Radius Port:** Enter the RADIUS server's shared secret here

**Remote Radius Type:** Select the remote RADIUS server type here. The default setting is SPAP.

**Edit:** Click to edit the selected entry.

**Delete:** Click to delete the entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate.**

## Authentication Settings- LDAP

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting LDAP as the Authentication Type, you can configure the LDAP authentication that will be applied to each wireless client in this network.

**Session timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:** Select 2.4GHz or 5GHz.

**SSID Index:** Select the SSID for this Authentication.

**Authentication Type:** Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the LDAP option.

**Web Redirection State:** The default setting is Disable. Select Enable to enable the website redirection feature.

**URL Path:** Select whether to use either HTTP or HTTPS here. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:** Select to Enable or Disable the Captive Portal with its IP interface feature here.

**VLAN Group:** Enter the VLAN Group ID here.

**Get IP From:** Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**Captive Portal Authentication**

Idle Timeout (1-1440)  Minute(s)

Band

SSID Index

Authentication Type

Web Redirection Interface Settings

Web Redirection State

URL Path

**IP Interface Settings**

IPIF Status

VLAN Group

Get IP From

IP Address

Subnet Mask

Gateway

DNS

LDAP Settings

Server

Port

Authenticate Mode

Username

Password

Base DN  (ou=,dc=)

Account Attribute  (ex.cn)

Identity   Auto Copy

Band	SSID Index	Captive Profile	Edit	Delete
------	------------	-----------------	------	--------

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Server:** Enter the LDAP server's IP address or domain name here.

**Port:** Enter the LDAP server's port number here.

**Authenticate Mode:** Select the authentication mode here. Options to choose from are Simple and TLS.

**Username:** Enter the LDAP server account's username here.

**Password:** Enter the LDAP server account's password here.

**Base DN:** Enter the administrator's domain name here

**Account Attribute:** Enter the LDAP account attribute string here. This string will be used to search for clients.

**Identity:** Enter the identity's full path string here. Alternatively, select the Auto Copy checkbox to automatically add the generic full path of the web page in the identity field.

**Edit:** Click to edit the selected entry.

**Delete:** Click to delete the entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

## Authentication Settings- POP3

The Captive Portal is a built-in web authentication server. When a station connects to an AP, the web browser will be redirected to a web authentication page. In this window, users can view and configure the Captive Portal settings. After selecting POP3 as the Authentication Type, you can configure the POP3 authentication that will be applied to each wireless client in this network.

**Session timeout(1-1440):** Enter the session timeout value here. This value can be from 1 to 1440 minutes. By default, this value is 60 minutes.

**Band:** Select 2.4GHz or 5GHz.

**SSID Index:** Select the SSID for this Authentication.

**Authentication Type:** Select the captive portal encryption type here. Options to choose from are Web Redirection, Username/Password, Passcode, Remote RADIUS, LDAP and POP3. In this section we'll discuss the POP3 option.

**Web Redirection State:** The default setting is Disable. Select Enable to enable the website redirection feature.

**URL Path:** Select whether to use either HTTP or HTTPS here. After selecting either http:// or https://, enter the URL of the website that will be used in the space provided.

**IPIF Status:** Select to Enable or Disable the Captive Portal with its IP interface feature here.

**VLAN Group:** Enter the VLAN Group ID here.

**Captive Portal Authentication**

Idle Timeout (1-1440)  Minute(s)

Band

SSID Index

Authentication Type

**Web Redirection Interface Settings**

Web Redirection State

URL Path

**IP Interface Settings**

IPIF Status

VLAN Group

Get IP From

IP Address

Subnet Mask

Gateway

DNS

**POP3 Settings**

Server

Port

Connection Type

Band	SSID Index	Captive Profile	Edit	Delete
------	------------	-----------------	------	--------

**Get IP From:** Static IP (Manual) is chosen here. Choose this option if you do not have a DHCP server in your network, or if you wish to assign a static IP address to the DAP-X2810. When Dynamic IP (DHCP) is selected, the other fields here will be grayed out. Please allow about 2 minutes for the DHCP client to be functional once this selection is made.

**IP Address:** Assign a static IP address that is within the IP address range of your network.

**Subnet Mask:** Enter the subnet mask. All devices in the network must share the same subnet mask.

**Gateway:** Enter the IP address of the gateway/router in your network.

**DNS:** Enter a DNS server IP address. This is usually the local IP address of your gateway/router.

**Server:** Enter the POP3 server's IP address or domain name here.

**Port:** Port: Enter the POP server's port number here.

**Connection Type:** Select the connection type here. Options to choose from are None and SSL/TLS.

**Edit:** Click to edit the selected entry.

**Delete:** Click to delete the entry.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate.**

## Login Page Upload

In this window, users can upload a custom login web page that will be used by the captive portal feature. Click the **Browse** button to navigate to the login style located on the managing computer and then click the **Upload** button to initiate the upload.

**Upload Login Style From Local Hard Drive:** In this field the path to the login style file that will be uploaded is displayed. Alternatively, the path can be manually entered here.

**Login Page Style List:** Select the wireless band and login style that will be used in each SSID here. Click the download button to download the template file for the login page and click the delete button to delete the template file.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

ID	Style Name	Pri	S-1	S-2	S-3	S-4	S-5	S-6	S-7	Download	Del
1	pages_default.tar	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		
2	pages_headerpic.tar	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		
3	pages_license.tar	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		

## MAC Bypass

The DAP-X2810 features a wireless MAC Bypass. Once finished editing these settings, click the **Save** button to let the changes take effect.

**Wireless Band:** Select the wireless band for MAC Bypass.

**SSID Index:** Select the SSID for MAC Bypass.

**MAC Address:** Enter each MAC address that you wish to include in your bypass list, and click Add.

**MAC Address List:** When a MAC address is entered, it appears in this list.  
Highlight a MAC address and click the Delete icon to remove it from this list.

**Upload File:** To upload a MAC bypass list file, click Browse and navigate to the MAC bypass list file saved on the computer, and then click Upload.

**Load MAC File to Local Hard Driver:** To download MAC bypass list file, click Download and save the MAC bypass list.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'MAC Bypass Settings' web page. At the top, there are three configuration fields: 'Wireless Band' with a dropdown menu set to '2.4 GHz', 'SSID Index' with a dropdown menu set to 'Primary SSID', and 'MAC Address' with six input boxes separated by colons. Below the MAC Address field is an 'Add' button. A table with three columns: 'ID', 'MAC Address', and 'Delete' is present. Below the table are two sections: 'Upload MAC File' with an 'Upload File:' label, a 'Choose File' button, a 'No file chosen' text, and an 'Upload' button; and 'Download MAC File' with a 'Load MAC File to Local Hard Driver:' label and a 'Download' button. A 'Save' button is located at the bottom right of the page.

## DHCP Server

### Dynamic Pool Settings

The DHCP address pool defines the range of the IP address that can be assigned to stations in the network. A Dynamic Pool allows wireless stations to receive an available IP with lease time control. If needed or required in the network, the DAP-X2810 is capable of acting as a DHCP server.

**Function Enable/Disable:** Dynamic Host Configuration Protocol (DHCP) assigns dynamic IP addresses to devices on the network. This protocol simplifies network management and allows new wireless devices to receive IP addresses automatically without the need to manually assign new IP addresses. Select Enable to allow the DAP-X2810 to function as a DHCP server.

**IP Assigned From:** Input the first IP address available for assignment on your network.

**IP Pool Range(1-254):** Enter the number of IP addresses available for assignment. IP addresses are increments of the IP address specified in the "IP Assigned From" field.

**Subnet Mask:** All devices in the network must have the same subnet mask to communicate. Enter the subnet mask for the network here.

**Gateway:** Enter the IP address of the gateway on the network.

**WINS:** Specify the Windows Internet Naming Service (WINS) server address for the wireless network. WINS is a system that determines the IP address of a network computer that has a dynamically assigned IP address.

**DNS:** Enter the IP address of the Domain Name System (DNS) server. The DNS server translates domain names such as www.dlink.com into IP addresses.

**Domain Name:** Enter the domain name of the network, if applicable. (An example of a domain name is: www.dlink.com.)

**Lease Time:** The lease time is the period of time before the DHCP server will assign new IP addresses.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

Dynamic Pool Settings	
<b>DHCP Server Control</b>	
Function Enable/Disable	Disable ▾
<b>Dynamic Pool Settings</b>	
IP Assigned From	192.168.0.20
IP Pool Range(1-254)	235
Subnet Mask	255.255.255.0
Gateway	
WINS	
DNS	
Domain Name	dlink-ap
Lease Time (60 - 31536000 sec)	604800
<input type="button" value="Save"/>	

## Static Pool Setting

The DHCP address pool defines the range of IP addresses that can be assigned to stations on the network. A static pool allows specific wireless stations to receive a fixed IP without time control.

**Function Enable/Disable:** Dynamic Host Configuration Protocol (DHCP) assigns IP addresses to wireless devices on the network. This protocol simplifies network management and allows new wireless devices to receive IP addresses automatically without the need to manually assign IP addresses. Select Enable to allow the DAP-X2810 to function as a DHCP server.

**Assigned IP:** Use the Static Pool Settings to assign the same IP address to a device every time you start up. The IP addresses assigned in the Static Pool list must NOT be in the same IP range as the Dynamic Pool. After you have assigned a static IP address to a device via its MAC address, click Apply; the device will appear in the Assigned Static Pool at the bottom of the screen. You can edit or delete the device in this list.

**Assigned MAC Address:** Enter the MAC address of the device requesting association here.

**Subnet Mask:** Define the subnet mask of the IP address specified in the "IP Assigned From" field.

### Static Pool Settings

**DHCP Server Control**

Function Enable/Disable Disable ▾

**Static Pool Setting**

Host Name

Assigned IP

Assigned MAC Address

Subnet Mask

Gateway

WINS

DNS

Domain Name

Save

Host Name	MAC Address	IP Address	Edit	Delete

**Gateway:** Specify the Gateway address for the wireless network.

**WINS:** Specify the Windows Internet Naming Service (WINS) server address for the wireless network. WINS is a system that determines the IP address of a network computer with a dynamically assigned IP address, if applicable.

**DNS:** Enter the DNS server address for your wireless network.

**Domain Name:** Specify the domain name for the network.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate.**

## Current IP Mapping List

This window displays information about the current assigned DHCP dynamic and static IP address pools. This information is available when you enable the DHCP server on the AP and assign dynamic and static IP address pools.

**Current DHCP Dynamic Profile:** These are IP address pools the DHCP server has assigned using the dynamic pool setting.

**Binding MAC Address:** The MAC address of a device on the network that is assigned an IP address from the DHCP dynamic pool.

**Assigned IP Address:** The current corresponding DHCP-assigned IP address of the device.

**Lease Time:** The length of time that the dynamic IP address will be valid.

**Current DHCP Static Pools:** These are the IP address pools of the DHCP server assigned through the static pool settings.

**Binding MAC Address:** The MAC address of a device on the network that is within the DHCP static IP address pool.

**Assigned IP Address:** The current corresponding DHCP-assigned static IP address of the device.

**Binding MAC Address:** The MAC address of a device on the network that is assigned an IP address from the DHCP dynamic pool.

**Assigned IP Address:** The current corresponding DHCP-assigned static IP address of the device.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

Current IP Mapping List			
<b>Current DHCP Dynamic Pools</b>			
Host Name	Binding MAC Address	Assigned IP Address	Lease Time
<b>Current DHCP Static Pools</b>			
Host Name	Binding MAC Address	Assigned IP Address	

## Filters

### Wireless MAC ACL

This page allows the user to configure Wireless MAC ACL settings for access control.

**Wireless Band:** Displays the current wireless band rate.

**Access Control List:** Select **Disable** to disable the filters function.

Select **Accept** to accept only those devices with MAC addresses in the Access Control List. All other devices not on the list will be rejected.

Select **Reject** to reject the devices with MAC addresses on the Access Control List. All other devices not on the list will be accepted.

**SSID Index:** Click the drop-down menu to select the SSID for the specified wireless band.

**MAC Address:** Enter each MAC address that you wish to include in your filter list, and click **Apply**.

**MAC Address List:** When you enter a MAC address, it appears in this list. Highlight a MAC address and click Delete to remove it from this list.

#### Current Client Information

**Information:** This table displays information about all the current connected stations.

**Upload File:** To upload an ACL list file, click Browse and navigate to the ACL list file saved on the computer, and then click Upload.

#### Load MAC File to Local

**Hard Driver:** To download the ACL list, click Download and to save the ACL list.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'Wireless MAC ACL Settings' page. At the top, it displays 'Wireless Band' set to '2.4 GHz' and 'Total : 512 Used : 0'. Below this, 'Access Control List' is set to 'Disable'. The 'SSID Index' is set to 'Primary SSID'. There is a 'MAC Address' input field with an 'Add' button. A table titled 'Current Client Information' has columns for 'ID', 'MAC Address', and 'Delete'. Below the table, there are sections for 'Upload ACL File' (with 'Choose File' and 'Upload' buttons) and 'Download ACL File' (with a 'Download' button). A 'Save' button is located at the bottom right.

## WLAN Partition

This page allows the user to configure a WLAN Partition.

**Wireless Band:** Displays the current wireless band.

**Link Integrity:** Select **Enable** or **Disable**. If the Ethernet connection between the LAN and the AP is disconnected, enabling this feature will cause the wireless segment associated with the AP to be disassociated from the AP.

**Ethernet WLAN Access:** The default is Enable. When disabled, all data from the Ethernet to associated wireless devices will be blocked. Wireless devices can still send data to the Ethernet.

**Internal Station Connection:** The default value is Enable, which allows stations to intercommunicate by connecting to a target AP. When disabled, wireless stations cannot exchange data on the same Multi-SSID. In Guest mode, wireless stations cannot exchange data with any station on your network.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'WLAN Partition' configuration window. It includes the following settings:

- Wireless Band:** 2.4 GHz (dropdown menu)
- Link Integrity:** Disable (dropdown menu)
- Ethernet to WLAN Access:** Enable (dropdown menu)
- Internal Station Connection:**
  - Primary SSID:  Enable,  Disable,  Guest Mode
  - Multi-SSID 1:  Enable,  Disable,  Guest Mode
  - Multi-SSID 2:  Enable,  Disable,  Guest Mode
  - Multi-SSID 3:  Enable,  Disable,  Guest Mode
  - Multi-SSID 4:  Enable,  Disable,  Guest Mode
  - Multi-SSID 5:  Enable,  Disable,  Guest Mode
  - Multi-SSID 6:  Enable,  Disable,  Guest Mode
  - Multi-SSID 7:  Enable,  Disable,  Guest Mode

A 'Save' button is located at the bottom right of the configuration window.

## IP Filter Settings

Enter the IP address or network address that will be used in the IP filter rule (e.g. an IP address like 192.168.70.66 or a network address like 192.168.70.0). This IP address or network will be inaccessible to wireless clients in this network.

**Wireless Band:** Click the drop-down menu to select the wireless band, 2.4GHz or 5GHz.

**SSID Index:** Click the drop-down menu to select the SSID for the IP filter.

**Filter State:** Click the drop-down menu to enable or disable the filter state. By default this feature is disabled.

**IP Address:** Enter the IP address or network address.

**Subnet Mask:** Enter the subnet mask of the IP address or networks address.

**IP Address List:** When an IP address is entered, it appears in the list. Highlight an IP address and click **Delete** icon to remove it from the list.

**Upload IP Filter File:** To upload the IP filter list file, click **Choose File** and navigate to the IP filter list file saved on the computer, and then click **Upload**.

**Download IP Filter File:** To download the IP Filter list file, click **Download** and to save the IP filter list.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'IP Filter Settings' web interface. It features several configuration options: 'Wireless Band' (2.4 GHz), 'SSID Index' (Primary SSID), and 'Filter State' (Disable). Below these are input fields for 'IP Address' and 'Subnet Mask', followed by an 'Add' button. A table with columns 'ID', 'IP Address', 'Subnet Mask', and 'Delete' is present. Below the table are sections for 'Upload IP Filter File' (with 'Choose File' and 'Upload' buttons) and 'Download IP Filter File' (with a 'Download' button). A 'Save' button is located at the bottom right.

ID	IP Address	Subnet Mask	Delete
<b>Upload IP Filter File</b>			
Upload File :		Choose File	No file chosen
<b>Download IP Filter File</b>		Download	

# Traffic Control

## Uplink/Downlink Setting

The uplink/downlink setting allows users to customize the downlink and uplink interfaces including specifying downlink/uplink bandwidth rates in Mbits per second. These values are also used in the QoS and Traffic Manager windows. Once the desired uplink and downlink settings are finished, click the **Save** button to let your changes take effect.

**Downlink Bandwidth:** The downlink bandwidth in Mbits per second.

**Uplink Bandwidth:** The uplink bandwidth in Mbits per second.

Click to save the updated configuration.

**Save:** To make the updates permanent, click Configuration > **Save and Activate**.

The screenshot shows the 'Uplink and Downlink Settings' window. At the top, it says 'Ethernet' with radio buttons for 'Downlink' and 'Uplink'. Below that are two tabs: '2.4 GHz' (selected) and '5 GHz'. The window is divided into two main sections: 'Downlink Interface' and 'Uplink Interface'. Each section contains a grid of checkboxes for 'Primary-ssid' and 'Multi-ssid1' through 'Multi-ssid7'. At the bottom, there are two input fields: 'Downlink Bandwidth(1~1200)' with a value of '100' and 'Uplink Bandwidth(1~1200)' with a value of '100', both labeled 'Mbits/sec'. A 'Save' button is located in the bottom right corner.

## QoS

Quality of Service (QoS) enhances the experience of using a network by prioritizing the traffic of different applications. The DAP-X2810 supports four priority levels. Once the desired QoS settings are finished, click the **Save** button to let your changes take effect.

**Enable QoS:** Check this box to allow QoS to prioritize traffic. Use the drop-down menus to select the four levels of priority. Click the Save button when you are finished.

**Downlink Bandwidth:** The downlink bandwidth in Mbits per second. This value is entered in the Uplink/Downlink Setting window.

**Uplink Bandwidth:** The uplink bandwidth in Mbits per second. This value is entered in the Uplink/Downlink Setting window.

**ACK/DHCP/ICMP/DNS Priority:** Click the drop-down menu to select the level of priority for the selected rule.

**Web Traffic Priority:** Click the drop-down menu to select the level of priority for the selected rule.

**FTP Traffic Priority:** Click the drop-down menu to select the level of priority for the selected rule.

**User Defined-1/2/3/4 Priority:** Click the drop-down menu to select the level of priority for the selected rule.

**Other Traffic Priority:** Click the drop-down menu to select the level of priority for the selected rule.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

QoS	
Enable QoS	<input type="checkbox"/>
Advanced QoS	
Downlink Bandwidth	100 Mbits/sec
Uplink Bandwidth	100 Mbits/sec
ACK/DHCP/ICMP/DNS Priority	Highest Priority Limit 100 % Port 53,67,68,546,547
Mail Traffic Priority	Second Priority Limit 100 % Port 25,110,465,995
Web Traffic Priority	Third Priority Limit 100 % Port 80,443,3128,8080
FTP Traffic Priority	Low Priority Limit 100 % Port 20,21
User Defined-1 Priority	Highest Priority Limit 100 % Port 0 - 0
User Defined-2 Priority	Second Priority Limit 100 % Port 0 - 0
User Defined-3 Priority	Third Priority Limit 100 % Port 0 - 0
User Defined-4 Priority	Low Priority Limit 100 % Port 0 - 0
Other Traffic Priority	Low Priority Limit 100 %
<b>Save</b>	

## Traffic Manager

The traffic manager feature allows users to create traffic management rules that specify how to deal with listed client traffic and specify downlink/ uplink speeds for new traffic manager rules. Click the **Save** button to let your changes take effect.

**Traffic Manager:** Use the drop-down menu to **Enable** the traffic manager feature.

**Unlisted Client Traffic:** Select **Deny** or **Forward** to determine how to deal with unlisted client traffic.

**Downlink Bandwidth:** The downlink bandwidth in Mbits per second. This value is entered in the Uplink/Downlink Setting window.

**Uplink Bandwidth:** The uplink bandwidth in Mbits per second. This value is entered in the Uplink/Downlink Setting window.

**Name:** Enter the name of the traffic manager rule.

**Client IP (optional):** Enter the client IP address of the traffic manager rule.

**Client MAC (optional):** Enter the client MAC address of the traffic manager rule.

**Downlink Speed:** Enter the downlink speed in Mbits per second.

**Uplink Speed:** Enter the uplink speed in Mbits per second.

**Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

**Traffic Manager**

Traffic Manager:  ▾

Unlisted Clients Traffic:  Deny  Forward

Downlink Bandwidth:  Mbits/sec

Uplink Bandwidth:  Mbits/sec

**Add Traffic Manager**

Name:

Client IP (Optional):

Client MAC (Optional):

Downlink Speed:  Mbits/sec

Uplink Speed:  Mbits/sec

**Traffic Manager Rules**

Name	Client IP	Client MAC	Downlink Speed	Uplink Speed	Edit	Delete

# Status

In the Status Section the user can monitor and view the configuration settings of the access point. Here the user can also view statistics about client information, WDS information and more. The following pages will explain settings found in the Status section in more detail.

The screenshot displays the D-Link DAP-X2810 web interface. The top navigation bar includes links for Home, Maintenance, Configuration, System, Logout, and Help. The left sidebar menu shows the following options: DAP-X2810, Basic Settings, Advanced Settings, Status, Device Information, Client Information, WDS Information, Channel Analyze, Statistics, and Log. The main content area is titled "Device Information" and contains the following data:

Device Information	
<b>Firmware Version: v1.00</b>	
Ethernet MAC Address	08:5a:11:92:0b:a0
Wireless MAC Address(2.4GHz)	Primary: 08:5a:11:92:0b:a0 SSID 1~7: 08:5a:11:92:0b:a1 ~ 08:5a:11:92:0b:a7
Wireless MAC Address(5GHz)	Primary: 08:5a:11:92:0b:a8 SSID 1~7: 08:5a:11:92:0b:a9 ~ 08:5a:11:92:0b:af
Ethernet	
IP Address	192.168.0.101
Subnet Mask	255.255.255.0
Gateway	192.168.0.1
DNS	192.168.0.1 192.168.0.1
Wireless (2.4GHz)	
Network Name (SSID)	dlink
Channel	11
Data Rate	Auto
Security	None
Wireless (5GHz)	
Network Name (SSID)	dlink
Channel	149
Data Rate	Auto
Security	None
Device Status	
CPU Utilization	0%
Memory Utilization	74%
Nuclias Connect	
Connection Status	Disconnect
Server IP/PORT	
Group ID	

## Device Information

This page displays information like firmware version, Ethernet and wireless parameters, as well as the information regarding CPU and memory utilization.

**Device Information:** This read-only window displays the configuration settings of the DAP-X2810, including the firmware version and the device's MAC address.

Device Information	
	<b>Firmware Version: v1.00</b>
Ethernet MAC Address	08:5a:11:92:0b:a0
Wireless MAC Address(2.4GHz)	Primary: 08:5a:11:92:0b:a0 SSID 1~7: 08:5a:11:92:0b:a1 ~ 08:5a:11:92:0b:a7
Wireless MAC Address(5GHz)	Primary: 08:5a:11:92:0b:a8 SSID 1~7: 08:5a:11:92:0b:a9 ~ 08:5a:11:92:0b:af
<b>Ethernet</b>	
IP Address	192.168.0.101
Subnet Mask	255.255.255.0
Gateway	192.168.0.1
DNS	192.168.0.1 192.168.0.1
<b>Wireless (2.4GHz)</b>	
Network Name (SSID)	dlink
Channel	11
Data Rate	Auto
Security	None
<b>Wireless (5GHz)</b>	
Network Name (SSID)	dlink
Channel	149
Data Rate	Auto
Security	None
<b>Device Status</b>	
CPU Utilization	0%
Memory Utilization	74%
<b>Nuclias Connect</b>	
Connection Status	Disconnect
Server IP/PORT	
Group ID	

## Client Information

This page displays the associated client's SSID, MAC, band, authentication method, signal strength, and power saving mode for the DAP-X2810 network.

**Client Information:** This window displays the wireless client information for clients currently connected to the DAP-X2810.

**SSID:** Displays the SSID of the client.

**MAC:** Displays the MAC address of the client.

**Band:** Displays the wireless band that the client is connected to.

**Authentication:** Displays the type of authentication being used.

**RSSI:** Displays the client's signal strength.

**Power Saving Mode:** Displays the status of the power-saving feature.

**System Info:** Displays the associated clients' OS information for the network.

Client Information						
Client Information		Station association (2.4GHz): 0				
SSID	MAC	Band	Authentication	RSSI	Power Saving Mode	System Info
Client Information		Station association (5GHz): 0				
SSID	MAC	Band	Authentication	RSSI	Power Saving Mode	System Info

## WDS Information Page

This page displays the access point's SSID, MAC, band, authentication method, signal strength, and status for the DAP-X2810's Wireless Distribution System network.

**WDS Information:** This window displays the Wireless Distribution System information for clients currently connected to the DAP-X2810.

**Name:** Displays the SSID of the client.

**MAC:** Displays the MAC address of the client.

**Authentication:** Displays the type of authentication being used.

**Signal:** Displays the client's signal strength.

**Status:** Displays the status of the WDS link.

WDS Information				
WDS Information		Channel: 11 (2.462 GHz)		
Name	MAC	Authentication	Signal	Status
WDS Information		Channel: 149 (5.745 GHz)		
Name	MAC	Authentication	Signal	Status

## Channel Analyze

**Wireless Band:** Select either 2.4Ghz or 5GHz.

**Detect:** Click the Detect button to scan.

**AP List:** This will list the transmitting channels and quality.

The screenshot shows a web interface titled "Channel Analyze". At the top, there is a "Wireless Band" dropdown menu currently set to "2.4GHz". Below this is a "Detect" button. Underneath the button is a section labeled "Wireless Summary" which contains a sub-section titled "AP List". This section displays a table with the following columns: "CH", "AP Num", "MRssi(%)", "ARssi(%)", and "Evaluation". The table is currently empty.

# Statistics

## Ethernet Traffic Statistics

Displays wired interface network traffic information.

**Ethernet Traffic Statistics:** This page displays transmitted and received count statistics for packets and bytes.

Ethernet Traffic Statistics	
<input type="button" value="Clear"/> <input type="button" value="Refresh"/>	
<b>Transmitted Count</b>	
Transmitted Packet Count	11,899
Transmitted Bytes Count	4,202,475
Dropped Packet Count	0
<b>Received Count</b>	
Received Packet Count	36,057
Received Bytes Count	10,852,705
Dropped Packet Count	0

## WLAN Traffic Statistics

Displays throughput, transmitted frame, received frame, and error information for the AP network.

**WLAN Traffic Statistics:** This page displays wireless network statistics for data throughput, transmitted and received frames, and frame errors.

WLAN Traffic Statistics		
	2.4GHz	5GHz
<b>Transmitted Count</b>		
Transmitted Packet Count	0	0
Transmitted Bytes Count	0	0
Dropped Packet Count	0	0
Transmitted Retry Count	0	0
<b>Received Count</b>		
Received Packet Count	0	0
Received Bytes Count	0	0
Dropped Packet Count	0	0
Received CRC Count	0	0
Received Decryption Error Count	0	0
Received MIC Error Count	0	0
Received PHY Error Count	899,266	1,895,467

# Log

## View Log

The AP's embedded memory holds logs here. The log information includes but is not limited to the following items: cold start AP, upgrading firmware, client association with APs, and web login. The web page holds up to 500 logs.

**View Log:** The AP's embedded memory displays system and network messages including a time stamp and message type. The log information includes but is not limited to the following items: cold start AP, upgrading firmware, client association with APs, and web login. The web page holds up to 500 logs.

View Log		
<input type="button" value="First Page"/>	<input type="button" value="Last Page"/>	<input type="button" value="Previous"/> <input type="button" value="Next"/> <input type="button" value="Clear"/>
Page 1 of 3		
Time	Priority	Message
Aug 20 18:06:25	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 18:05:55	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 18:02:49	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:54:10	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:51:00	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:50:21	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:47:20	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:15:41	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:12:43	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:11:27	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:08:24	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:08:23	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:07:08	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 17:04:33	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 17:03:43	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 16:58:55	[SYSACT]	Web logout from 192.168.0.102 with HTTP
Aug 20 16:54:38	[SYSACT]	Web login success from 192.168.0.102 with HTTP
Aug 20 16:50:10	[SYSACT]	Web login failure from 192.168.0.102 with HTTP
Aug 20 16:49:40	[SYSACT]	Web login failure from 192.168.0.102 with HTTP
Aug 20 16:41:32	[SYSACT]	Web logout from 192.168.0.102 with HTTP

## Log Settings

Enter the log server's IP address to send the log to that server. Check or uncheck System Activity, Wireless Activity, or Notice to specify what kind of log type you want it to log.

**Log Server/IP Address:** Enter the IP address of the server you would like to send the DAP-X2810 log to.

**Log Type:** Check the box for the type of activity you want to log. There are three types: System Activity, Wireless Activity, and Notice.

**EU directive Syslog Server Settings:** Enter the IP address of the syslog server you would like to send the DAP-X2810 log to.

**E-mail Notification:** Support Simple Mail Transfer Protocol for log schedule and periodical change key. It can not support Gmail SMTP port 465. Please set to Gmail SMTP port 25 or 587.

**Log Settings**

**Log Settings**

**Log Server Settings**

Log Server / IP Address

Log Type  System Activity  
 Wireless Activity  
 Notice

**External captive portal syslog server settings**

Log Server / IP Address

**Email Notification**

Email Notification  Enable

Outgoing mail server (SMTP)

Authentication  Enable

SSL/TLS  Enable

From Email Address

To Email Address

Email Server Address

SMTP Port

User Name

Password

Confirm Password


**Email Log Schedule**

Schedule  hours or when Log is full

- Outgoing Mail Server (SMTP):** Click the drop-down menu to select the SMTP server type; options include: Internal, Gmail, Hotmail.
- Authentication:** Check the box to enable the authentication of the email notification.
- SSL/TLS:** Check the box to enable the SSL/TLS function.
- From Email Address:** Enter the email address.
- To Email Address:** Enter the email address.
- Email Server Address:** Enter the email server address.
- SMTP Port:** Enter the SMTP port.
- User Name:** Enter the name of the new user entry.
- Password:** Enter the password set for the email notification.
- Confirm Password:** Retype the password entry to confirm the password.
- E-mail Log Schedule:** Use the drop-down menu to set the email log schedule.
- Save:** Click to save the updated configuration. To make the updates permanent, click Configuration > **Save and Activate**.

## Maintenance Section

In the Status Section the user can monitor and view configuration settings of the access point. Here the user can also view statistics about client information, WDS information and more. The following pages will explain settings found in the maintenance section in more detail.

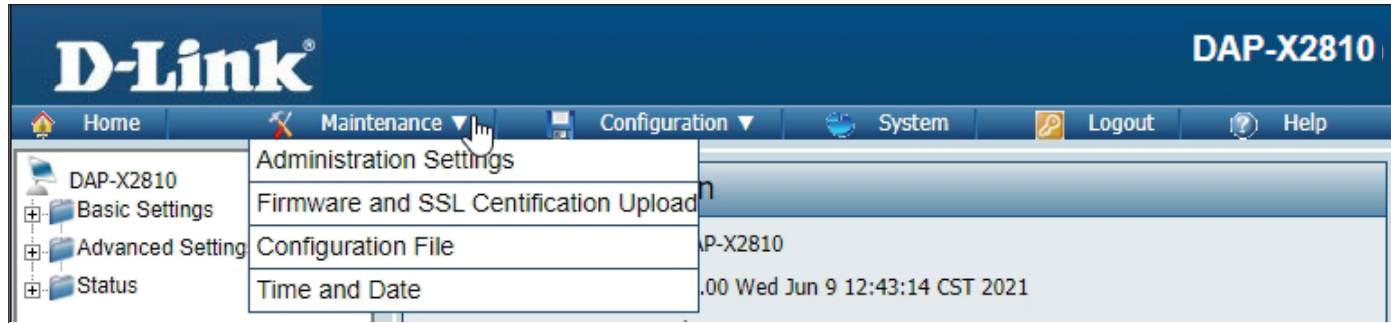

# Administration

## Limit Administrator

Check one or more of the eight main categories to display the various hidden administrator parameters and settings displayed on the next five pages. Each of the eight main categories display various hidden administrator parameters and settings.

**Limit Administrator VLAN ID:** Check the box provided and the **ID:** enter the specific VLAN ID that the administrator will be allowed to log in from.

**Limit Administrator IP:** Check to enable the Limit Administrator IP address.

**IP Range:** Enter the IP address range that the administrator will be allowed to log in from and then click the Add button.

The screenshot shows the 'Administration Settings' interface. The 'Limit Administrator' section is expanded and checked. It includes the following fields and options:

- Limit Administrator VLAN ID:** A checkbox labeled 'Enable' is checked, and the value '1' is entered in the adjacent text box.
- Limit Administrator IP:** A checkbox labeled 'Enable' is unchecked.
- IP Range:** Two text boxes labeled 'From' and 'To' are present, with an 'Add' button below them.

Below these fields is a table with the following columns: Item, From, To, and Delete. The table lists several settings categories, each with a small square icon to its right:

- System Name Settings
- Login Settings
- Console Settings
- Ping Control Setting
- LED Settings
- DDP Control Setting
- Country Settings
- Nuclias Connect Setting

A 'Save' button is located at the bottom right of the form.


## System Name Settings

Each of the eight main categories display various hidden administrator parameters and settings.

**System Name:** The name of the device. The default name is dapx2810.

**Location:** The physical location of the device, e.g. 72nd Floor, D-Link HQ.

**MDNS Name :** The MDNS name of the device. The default MDNS name is dapx2810.

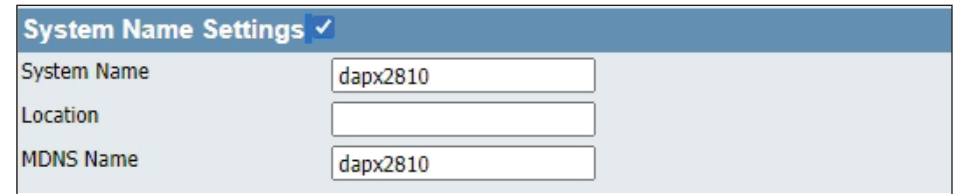

The screenshot shows the 'System Name Settings' configuration page. It has a blue header with a checkmark icon. Below the header, there are three input fields: 'System Name' with the value 'dapx2810', 'Location' which is empty, and 'MDNS Name' with the value 'dapx2810'.


## Login Settings

Each of the eight main categories display various hidden administrator parameters and settings.

**Login Name:** Enter a user name. The default is **admin**.

**New Password:** When changing your password, enter the new password here. The password is case-sensitive. "A" is a different character than "a." The length should be between 8 and 30 characters.

**Confirm Password:** Enter the new password a second time for confirmation purposes.

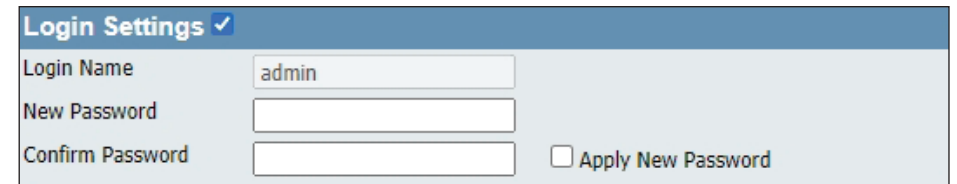

The screenshot shows the 'Login Settings' configuration page. It has a blue header with a checkmark icon. Below the header, there are three input fields: 'Login Name' with the value 'admin', 'New Password' which is empty, and 'Confirm Password' which is empty. To the right of the 'Confirm Password' field is a checkbox labeled 'Apply New Password' which is unchecked.


## Console Settings

Each of the eight main categories display various hidden administrator parameters and settings.

**Status:** Status is enabled by default. Uncheck the box to disable the console.

**Console Protocol:** Select the type of protocol you would like to use, Telnet or SSH.

**Time-out:** Set to 1 Min, 3 Mins, 5 Mins, 10 Mins, 15 Mins or Never.

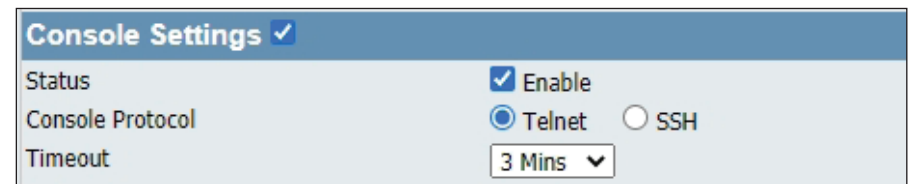


The screenshot shows the 'Console Settings' configuration page. It has a blue header with a checkmark icon. Below the header, there are three settings: 'Status' with a checked checkbox and the text 'Enable', 'Console Protocol' with radio buttons for 'Telnet' (selected) and 'SSH', and 'Timeout' with a dropdown menu showing '3 Mins'.

## Ping Control Setting

Each of the eight main categories display various hidden administrator parameters and settings.

**Status:** Status is enabled by default. Uncheck the box to disable ping control.




The screenshot shows a configuration panel for 'Ping Control Setting'. The title bar is blue with a white checkmark. Below it, the text 'Ping Control Setting' is followed by a checkmark. The main area contains the label 'Status' and a checked checkbox followed by the text 'Enable'.

## LED Settings

Each of the eight main categories display various hidden administrator parameters and settings

**LED Status:** Select the LED on/off you would like to use.




The screenshot shows a configuration panel for 'LED Settings'. The title bar is blue with a white checkmark. Below it, the text 'LED Settings' is followed by a checkmark. The main area contains the label 'LED Status' and two radio buttons: 'On' (which is selected) and 'Off'.

## DDP Setting

Each of the eight main categories display various hidden administrator parameters and settings.

Status is enabled by default. Uncheck the box to disable DDP control.



The screenshot shows a configuration panel for 'DDP Control Setting'. The title bar is blue with a white checkmark. Below it, the text 'DDP Control Setting' is followed by a checkmark. The main area contains the label 'Status' and a checked checkbox followed by the text 'Enable'.

## Country Setting

**Select a Country:** Choose from drop down list country where device is located.




The screenshot shows a configuration panel for 'Country Settings'. The title bar is blue with a white checkmark. Below it, the text 'Country Settings' is followed by a checkmark. The main area contains the label 'Select a Country' and a dropdown menu with 'United Kingdom' selected and a downward arrow.

## Nuclias Connect Settings

The Nuclias Connect section is used to create a set of APs on the Internet to be organized into a single group in order to increase ease of management.

**Enable Nuclias Connect:** Click the drop-down menu to enable or disable Nuclias Connect.



**Note:** To save the new configuration settings to the firmware, click **Configuration > Save and Activate**, otherwise click **Discard Changes** to delete any setting change.

## Firmware and SSL Upload

This page allows the user to perform a firmware upgrade. This upgrades the software running on the hardware used by the access point. This is a useful feature that prevents future bugs and allows for new features to be added to this product. Please go to your local D-Link website to see if there is a newer version firmware available.

**Firmware and SSL Certification Upload:** You can upload files to the access point.

**Upload Firmware from Local Hard Drive:** The current firmware version is displayed above the file location field. After the latest firmware is downloaded, click on the "Choose File" button to locate the new firmware. Once the file is selected, click on the "Open" and "Upload" buttons to begin updating the firmware. Please don't turn the power off while upgrading.

**Language Pack Upgrade :** After you have downloaded a language pack to your local drive, click "Choose File." Select the language pack and click "Open" and "Upload" to complete the upgrade.

**Upload SSL Certification from Local Hard Drive:** After you have downloaded a SSL certification to your local drive, click "Choose File." Select the certification and click "Open" and "Upload" to complete the upgrade.

The screenshot shows a web interface for uploading files. The title is "Firmware and SSL Certification Upload". It is divided into three main sections, each with a header bar:

- Update Firmware From Local Hard Drive:** This section shows the current "Firmware Version v1.00". Below this, there is a label "Upload Firmware From File :" followed by a "Choose File" button (which currently shows "No file chosen") and an "Upload" button.
- Language Pack Upgrade:** This section has a label "Upload :" followed by a "Choose File" button (showing "No file chosen") and an "Upload" button.
- Update SSL Certification From Local Hard Drive:** This section has two labels: "Upload Certificate From File :" and "Upload Key From File :". Each label is followed by a "Choose File" button (showing "No file chosen") and an "Upload" button.

## Configuration File Upload


This page allows the user to back up and recover the current configuration of the access point in case of a unit failure.

**Configuration File Upload and Download:** You can upload and download configuration files of the access point.

**Upload Configuration File:** Browse to the saved configuration file you have in your local drive and click "Open" and "Upload" to update the configuration.

**Download Configuration File:** Click "Download" to save the current configuration file to your local disk.

**Upload Nuclias Connect Network File:** Browse to the saved Nuclias Connect Network file you have in your local drive and click "Open" and "Upload" to upload the Nuclias Connect Network file .

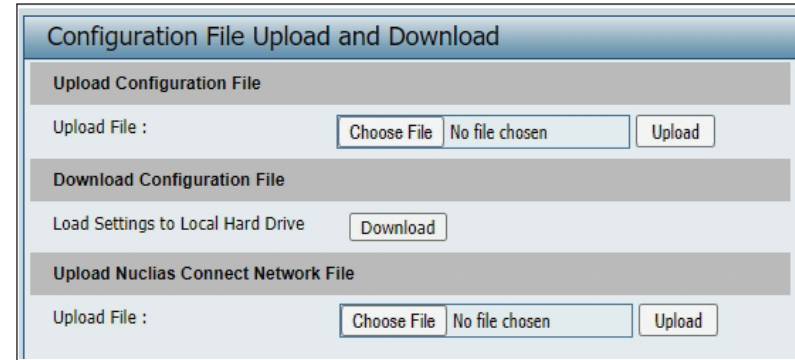

The screenshot shows a web interface titled "Configuration File Upload and Download". It is divided into three main sections:

- Upload Configuration File:** This section contains a label "Upload File :" followed by a file selection button labeled "Choose File" (which displays "No file chosen") and an "Upload" button.
- Download Configuration File:** This section contains a label "Load Settings to Local Hard Drive" followed by a "Download" button.
- Upload Nuclias Connect Network File:** This section contains a label "Upload File :" followed by a file selection button labeled "Choose File" (which displays "No file chosen") and an "Upload" button.

## Time and Date Settings

Enter the NTP server IP, choose the time zone, and enable or disable daylight saving time.

**Current Time:** Displays the current time and date settings.

**Enable NTP Server:** Check to enable the AP to get system time from an NTP server from the Internet.

**NTP Server:** Enter the NTP server IP address.

**Time Zone:** Use the drop-down menu to select your correct Time Zone.

**Enable Daylight Saving:** Check the box to enable Daylight Saving Time.

**Set the Date and Time Manually:** A user can either manually set the time for the AP here, or click the Copy Your Computer's Time Settings button to copy the time from the computer in use (Make sure that the computer's time is set correctly).

**Time and Date Settings**

**Time Configuration**  
Current Time 08/23/2021 18:06:24

**Automatic Time Configuration**  
Enable NTP   
NTP Server   
Time Zone (GMT+08:00) Kuala Lumpur, Singapore


**Set the Date and Time Manually**  
Date And Time Year 2021 Month Aug Day 23  
Hour 18 Minute 6 Second 25  
Copy your computer's Time Settings

**Daylight Configuration**  
Enable Daylight Saving   
Daylight Saving Offset 15  
Daylight Saving Dates  
DST Start Month Week Day Hour Minute  
DST End Month Week Day Hour Minute

Save

## Configuration and System

These are the remaining options to choose from in the top menu. **Configuration** allows the user to save and activate or discard the configurations. **System** allows the user to restart the unit, perform a factory reset or clear the language pack settings. **Logout** allows the user to safely log out from the access point's web configuration. **Help** allows the user to read more about the given options to configure without the need to consult the manual. The following pages will explain settings found in the configuration and system section in more detail.

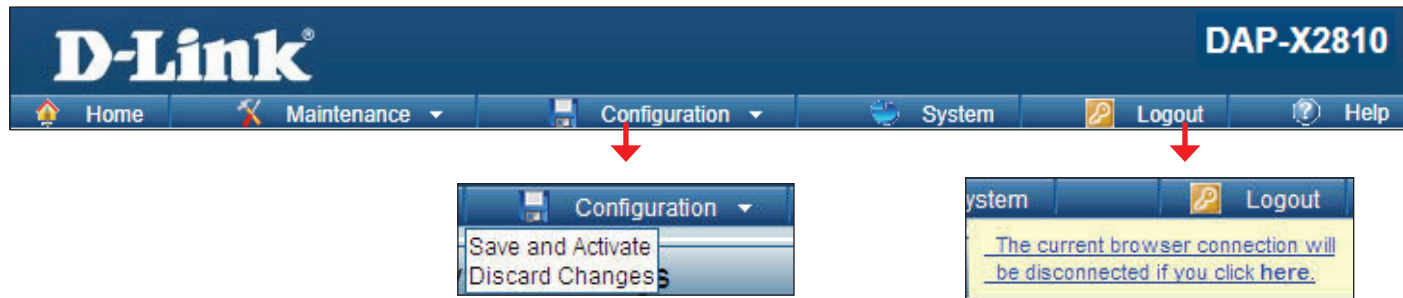


## System Settings

On this page the user can restart the unit, perform a factory reset of the access point or clear the added language pack.

**Restart the Device:** Click Restart to restart the DAP-X2810.

**Restore to Factory Default Settings:** Click Restore to restore the DAP-X2810 back to factory default settings.

**Clear Language Pack:** Click to clear the current language pack.

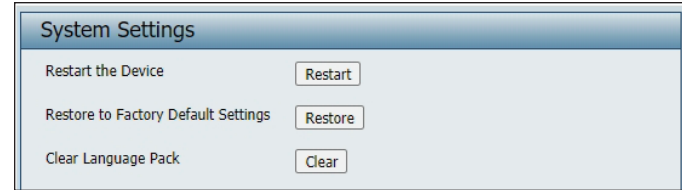

# Help

The help page is useful to view a brief description of a function available on the access point in case the manual is not present.

**Help:** Scroll down the Help page for topics and explanations.

### Basic Settings

**Wireless**  
Change the wireless settings on the device for an existing network or create a new network.

**Wireless Band**  
This is the operating frequency band. This Access Point (AP), operates within 2 bands, 2.4GHz and 5GHz. 2.4GHz works best with legacy devices and suitable for longer ranges. Select 5GHz for least interference and better performance.

**Mode**  
Select between Access Point, Wireless Distribution System (WDS) with AP, WDS and Wireless Client mode.

**Network Name/Service Set Identifier (SSID)**  
The SSID factory default is "dlink". Change the SSID to connect to existing wireless networks or establish a new wireless network.

**SSID Visibility**  
The SSID Visibility signal is enabled by default. Select Disable to make the Access Point invisible to all client devices.

**Auto Channel Selection**  
Enabled by default, when the device boots up, to automatically search for the best available channel.

**Channel**  
Auto Channel Selection is set as default. Settings for the channel can be configured to work with existing wireless networks or customized a new wireless network.

**Channel Width**  
Setup the Channel bandwidths. Use 20MHz and Auto 20/40MHz for 802.11n and non-802.11n wireless devices. Connect Mixed 802.11b/g/n for 2.4GHz and Mixed 802.11a/n for 5GHz. Configure Auto 20/40/80 MHz for 802.11ac and non 802.11ac wireless devices, and Mixed 802.11ac for 5GHz. When using Auto 20/40 MHz channel settings data can be transmitted using 40MHz and when using Auto 20/40/80MHz data can be transmitted using 80MHz.

**Authentication**  
Open System is the default authentication mode. Choose Data Encryption Mode to enable encryption.

**Open System**  
All devices are allowed to access the Access Point.

**Shared Key**  
Users must use the same WEP Share Key to access the Access Point on this network.

# Technical Specifications

## Standards

- IEEE 802.11ax
- IEEE 802.11ac
- IEEE 802.11n
- IEEE 802.11g
- IEEE 802.11a
- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3at
- IEEE 802.3x

## Network Management

- Web Browser interface (HTTP, Secure HTTP (HTTPS))
- NuLias Connect

## Security

- WPA™ Personal/Enterprise
- WPA2™ Personal/Enterprise
- WPA3™ Personal/Enterprise
- WEP™ 64-/128-bit

## Wireless Frequency Range

- 2.4 to 2.4835 GHz and 5.15 to 5.85 GHz

## Operating Voltage

- 12V/2.5A or 802.3at PoE

## Antenna Type

- Two Dual Band Internal Antennas (2.4Ghz 3.2dBi & 5Ghz 4.3dBi)

## LEDs

- Power/Status

## Temperature

- Operating: 0°C to 40°C
- Storing: -20°C to 65°C

## Humidity

- Operating: 10%~90% (non-condensing)
- Storing: 5%~95% (non-condensing)


## Certifications


- FCC
- CE
- IC
- RCM
- LVD

## Dimensions

- L = 170 mm
- W = 170mm
- H = 28 mm

# Antenna Pattern

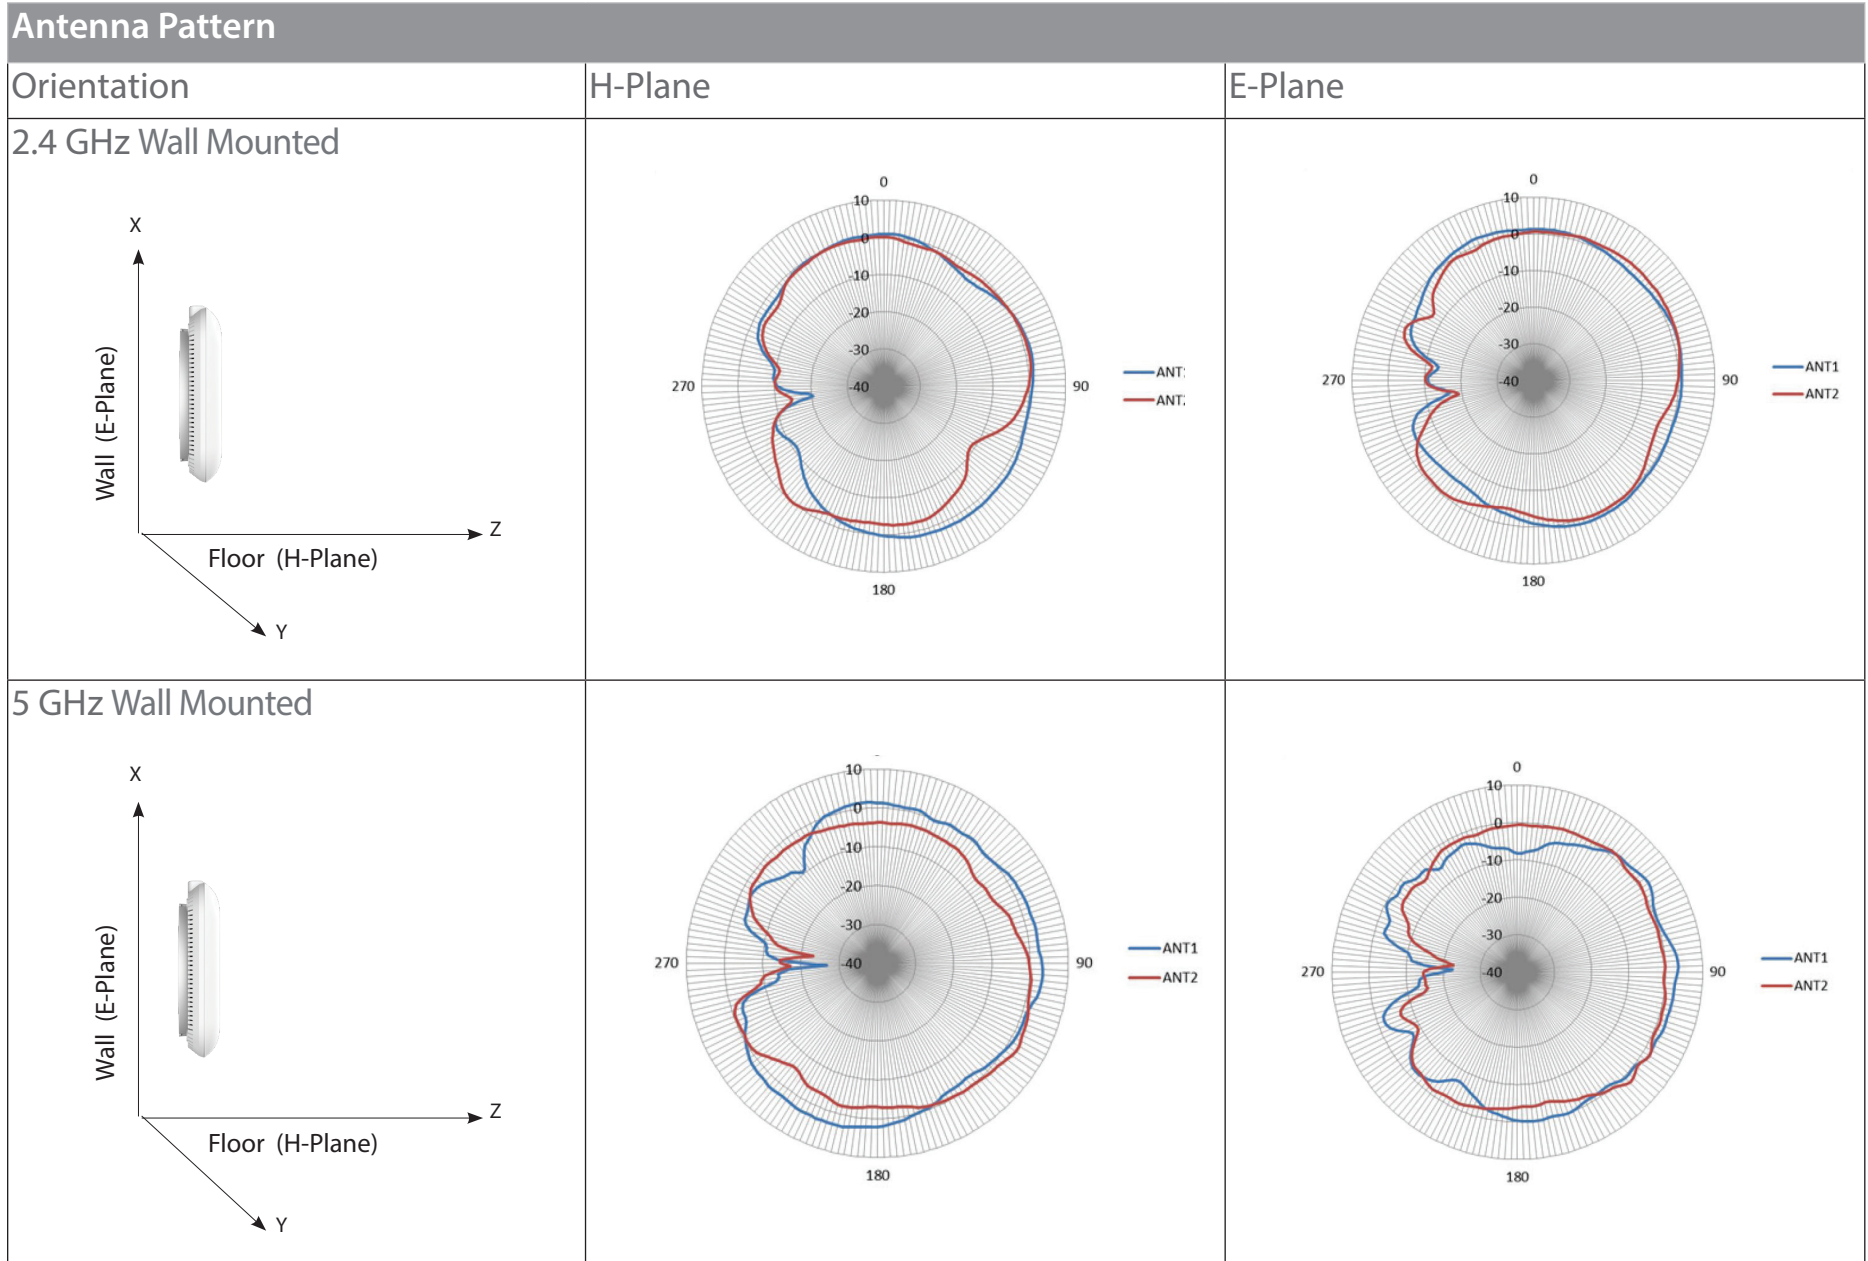

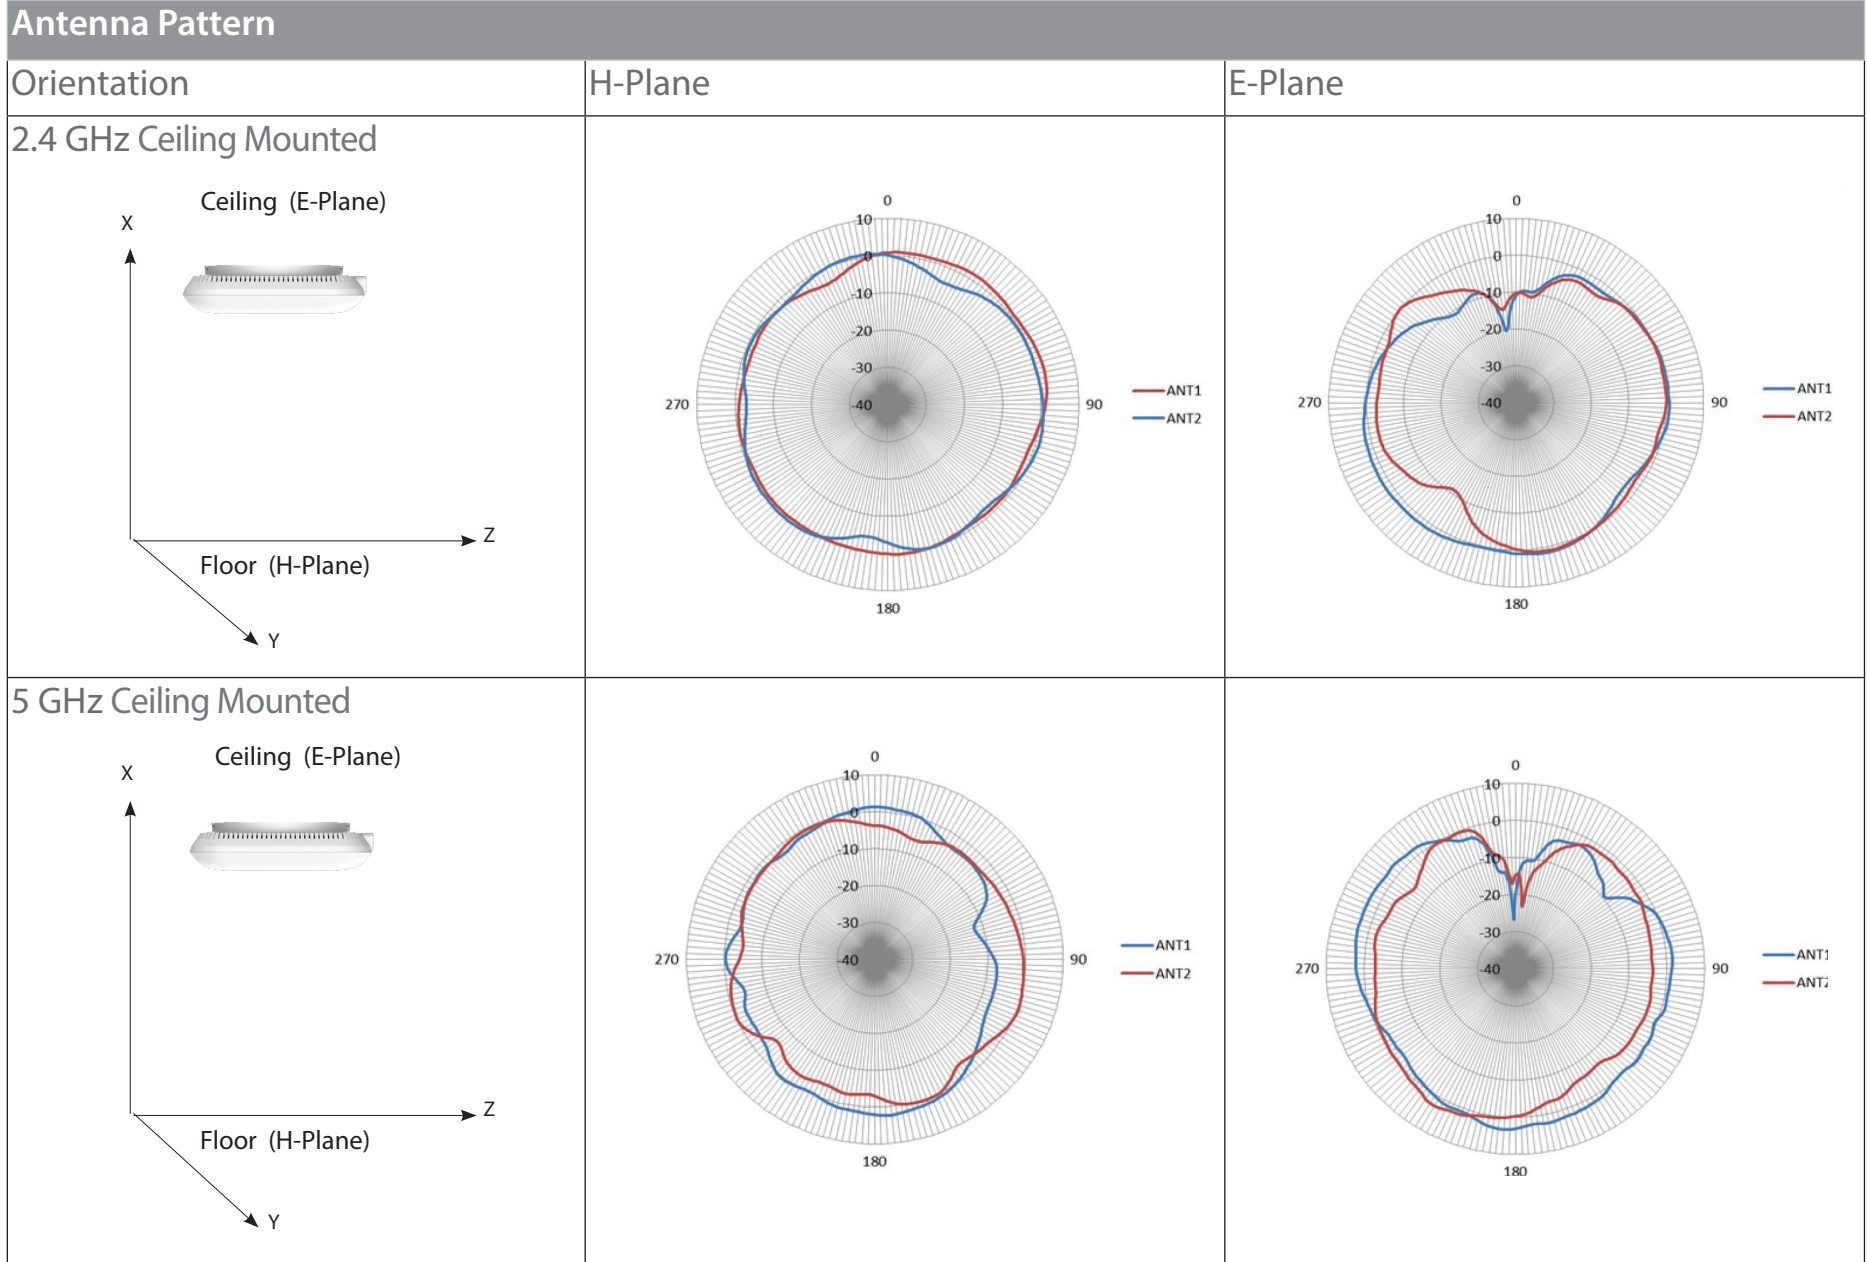

# Warranty

Subject to the terms and conditions set forth herein, D-Link Systems, Inc. (“D-Link”) provides this Limited Warranty:

- Only to the person or entity that originally purchased the product from D-Link or its authorized reseller or distributor, and
- Only for products purchased and delivered within the fifty states of the United States, the District of Columbia, U.S. Possessions or Protectorates, U.S. Military Installations, or addresses with an APO or FPO.

## **Limited Warranty:**

D-Link warrants that the hardware portion of the D-Link product described below (“Hardware”) will be free from material defects in workmanship and materials under normal use from the date of original retail purchase of the product, for the period set forth below (“Warranty Period”), except as otherwise stated herein.

- Hardware (excluding power supplies and fans): One (1) year
- Power supplies and fans: One (1) year
- Spare parts and spare kits: Ninety (90) days

The customer’s sole and exclusive remedy and the entire liability of D-Link and its suppliers under this Limited Warranty will be, at D-Link’s option, to repair or replace the defective Hardware during the Warranty Period at no charge to the original owner or to refund the actual purchase price paid. Any repair or replacement will be rendered by D-Link at an Authorized D-Link Service Office. The replacement hardware need not be new or have an identical make, model or part. D-Link may, at its option, replace the defective Hardware or any part thereof with any reconditioned product that D-Link reasonably determines is substantially equivalent (or superior) in all material respects to the defective Hardware. Repaired or replacement hardware will be warranted for the remainder of the original Warranty Period or ninety (90) days, whichever is longer, and is subject to the same limitations and exclusions. If a material defect is incapable of correction, or if D-Link determines that it is not practical to repair or replace the defective Hardware, the actual price paid by the original purchaser for the defective Hardware will be refunded by D-Link upon return to D-Link of the defective Hardware. All Hardware or part thereof that is replaced by D-Link, or for which the purchase price is refunded, shall become the property of D-Link upon replacement or refund.

### **Limited Software Warranty:**

D-Link warrants that the software portion of the product (“Software”) will substantially conform to D-Link’s then current functional specifications for the Software, as set forth in the applicable documentation, from the date of original retail purchase of the Software for a period of ninety (90) days (“Software Warranty Period”), provided that the Software is properly installed on approved hardware and operated as contemplated in its documentation. D-Link further warrants that, during the Software Warranty Period, the magnetic media on which D-Link delivers the Software will be free of physical defects. The customer’s sole and exclusive remedy and the entire liability of D-Link and its suppliers under this Limited Warranty will be, at D-Link’s option, to replace the non-conforming Software (or defective media) with software that substantially conforms to D-Link’s functional specifications for the Software or to refund the portion of the actual purchase price paid that is attributable to the Software. Except as otherwise agreed by DLink in writing, the replacement Software is provided only to the original licensee, and is subject to the terms and conditions of the license granted by D-Link for the Software. Replacement Software will be warranted for the remainder of the original Warranty Period and is subject to the same limitations and exclusions. If a material non-conformance is incapable of correction, or if D-Link determines in its sole discretion that it is not practical to replace the non-conforming Software, the price paid by the original licensee for the non-conforming Software will be refunded by D-Link; provided that the non-conforming Software (and all copies thereof) is first returned to D-Link. The license granted respecting any Software for which a refund is given automatically terminates.

### **Non-Applicability of Warranty:**

The Limited Warranty provided hereunder for Hardware and Software portions of D-Link’s products will not be applied to and does not cover any refurbished product and any product purchased through the inventory clearance or liquidation sale or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product and in that case, the product is being sold “As-Is” without any warranty whatsoever including, without limitation, the Limited Warranty as described herein, notwithstanding anything stated herein to the contrary.

### **Submitting A Claim:**

The customer shall return the product to the original purchase point based on its return policy. In case the return policy period has expired and the product is within warranty, the customer shall submit a claim to D-Link as outlined below:

- The customer must submit with the product as part of the claim a written description of the Hardware defect or Software nonconformance in sufficient detail to allow D-Link to confirm the same, along with proof of purchase of the product (such as a copy of the dated purchase invoice for the product) if the product is not registered.
- The customer must obtain a Case ID Number from D-Link Technical Support (USA 1-877-453-5465 or Canada 1-800-361-5265), who will attempt to assist the customer in resolving any suspected defects with the product. If the product is considered defective, the customer must obtain a Return Material Authorization (“RMA”) number by completing the RMA form. Enter the assigned Case ID Number at <https://rma.dlink.com/> (USA only) or <https://rma.dlink.ca> (Canada only).

- After an RMA number is issued, the defective product must be packaged securely in the original or other suitable shipping package to ensure that it will not be damaged in transit, and the RMA number must be prominently marked on the outside of the package. Do not include any manuals or accessories in the shipping package. D-Link will only replace the defective portion of the product and will not ship back any accessories.
- The customer is responsible for all in-bound shipping charges to D-Link. No Cash on Delivery (“COD”) is allowed. Products sent COD will either be rejected by D-Link or become the property of D-Link. Products shall be fully insured by the customer and shipped to D-Link Systems, Inc.
- **USA residents** send to 17595 Mt. Herrmann, Fountain Valley, CA 92708. D-Link will not be held responsible for any packages that are lost in transit to D-Link. The repaired or replaced packages will be shipped to the customer via UPS Ground or any common carrier selected by D-Link. Return shipping charges shall be prepaid by D-Link if you use an address in the United States, otherwise we will ship the product to you freight collect. Expedited shipping is available upon request and provided shipping charges are prepaid by the customer. D-Link may reject or return any product that is not packaged and shipped in strict compliance with the foregoing requirements, or for which an RMA number is not visible from the outside of the package. The product owner agrees to pay D-Link’s reasonable handling and return shipping charges for any product that is not packaged and shipped in accordance with the foregoing requirements, or that is determined by D-Link not to be defective or non-conforming.
- **Canadian residents** send to D-Link Networks, Inc., 2525 Meadowvale Boulevard Mississauga, Ontario, L5N 5S2 Canada. D-Link will not be held responsible for any packages that are lost in transit to D-Link. The repaired or replaced packages will be shipped to the customer via Purolator Canada or any common carrier selected by D-Link. Return shipping charges shall be prepaid by D-Link if you use an address in Canada, otherwise we will ship the product to you freight collect. Expedited shipping is available upon request and provided shipping charges are prepaid by the customer. D-Link may reject or return any product that is not packaged and shipped in strict compliance with the foregoing requirements, or for which an RMA number is not visible from the outside of the package. The product owner agrees to pay D-Link’s reasonable handling and return shipping charges for any product that is not packaged and shipped in accordance with the foregoing requirements, or that is determined by D-Link not to be defective or non-conforming. RMA phone number: 1-800-361-5265 Hours of Operation: Monday-Friday, 9:00AM – 9:00PM EST

### **What Is Not Covered:**

The Limited Warranty provided herein by D-Link does not cover:

Products that, in D-Link’s judgment, have been subjected to abuse, accident, alteration, modification, tampering, negligence, misuse, faulty installation, lack of reasonable care, repair or service in any way that is not contemplated in the documentation for the product, or if the model or serial number has been altered, tampered with, defaced or removed; Initial installation, installation and removal of the product for repair, and shipping costs; Operational adjustments covered in the operating manual for the product, and normal maintenance; Damage that occurs in shipment, due to act of God, failures due to power surge, and cosmetic damage; Any hardware, software, firmware or other products or services provided by anyone other than D-Link; and Products that have been purchased from inventory clearance or liquidation sales or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product.

While necessary maintenance or repairs on your Product can be performed by any company, we recommend that you use only an Authorized D-Link Service Office. Improper or incorrectly performed maintenance or repair voids this Limited Warranty.

**Disclaimer of Other Warranties:**

EXCEPT FOR THE LIMITED WARRANTY SPECIFIED HEREIN, THE PRODUCT IS PROVIDED “AS-IS” WITHOUT ANY WARRANTY OF ANY KIND WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT.

IF ANY IMPLIED WARRANTY CANNOT BE DISCLAIMED IN ANY TERRITORY WHERE A PRODUCT IS SOLD, THE DURATION OF SUCH IMPLIED WARRANTY SHALL BE LIMITED TO THE DURATION OF THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE. EXCEPT AS EXPRESSLY COVERED UNDER THE LIMITED WARRANTY PROVIDED HEREIN, THE ENTIRE RISK AS TO THE QUALITY, SELECTION AND PERFORMANCE OF THE PRODUCT IS WITH THE PURCHASER OF THE PRODUCT.

**Limitation of Liability:**

TO THE MAXIMUM EXTENT PERMITTED BY LAW, D-LINK IS NOT LIABLE UNDER ANY CONTRACT, NEGLIGENCE, STRICT LIABILITY OR OTHER LEGAL OR EQUITABLE THEORY FOR ANY LOSS OF USE OF THE PRODUCT, INCONVENIENCE OR DAMAGES OF ANY CHARACTER, WHETHER DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF GOODWILL, LOSS OF REVENUE OR PROFIT, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, FAILURE OF OTHER EQUIPMENT OR COMPUTER PROGRAMS TO WHICH D-LINK’S PRODUCT IS CONNECTED WITH, LOSS OF INFORMATION OR DATA CONTAINED IN, STORED ON, OR INTEGRATED WITH ANY PRODUCT RETURNED TO D-LINK FOR WARRANTY SERVICE) RESULTING FROM THE USE OF THE PRODUCT, RELATING TO WARRANTY SERVICE, OR ARISING OUT OF ANY BREACH OF THIS LIMITED WARRANTY, EVEN IF D-LINK HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE SOLE REMEDY FOR A BREACH OF THE FOREGOING LIMITED WARRANTY IS REPAIR, REPLACEMENT OR REFUND OF THE DEFECTIVE OR NONCONFORMING PRODUCT. THE MAXIMUM LIABILITY OF D-LINK UNDER THIS WARRANTY IS LIMITED TO THE PURCHASE PRICE OF THE PRODUCT COVERED BY THE WARRANTY. THE FOREGOING EXPRESS WRITTEN WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ANY OTHER WARRANTIES OR REMEDIES, EXPRESS, IMPLIED OR STATUTORY.

**Governing Law:**

This Limited Warranty shall be governed by the laws of the State of California. Some states do not allow exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the foregoing limitations and exclusions may not apply. This Limited Warranty provides specific legal rights and you may also have other rights which vary from state to state.

**Trademarks:**

D-Link is a registered trademark of D-Link Corporation/D-Link Systems, Inc. Other trademarks or registered trademarks are the property of their respective owners.

**Copyright Statement:**

No part of this publication or documentation accompanying this product may be reproduced in any form or by any means or used to make any

derivative such as translation, transformation, or adaptation without permission from D-Link Corporation/D-Link Systems, Inc., as stipulated by the United States Copyright Act of 1976 and any amendments thereto. Contents are subject to change without prior notice.

Copyright ©2018 by D-Link Corporation/D-Link Systems, Inc. All rights reserved.

## **Federal Communication Commission Interference Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

For product available in the USA market, only channel 1~11 can be operated. Selection of other channels is not possible.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

**Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 41 cm between the radiator & your body.

**IMPORTANT NOTE:**

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 32cm between the radiator & your body.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination. The firmware setting is not accessible by the end user.

For detailed warranty information applicable to products purchased outside the United States, please contact the corresponding local D-Link office.

This device and it's antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

**IC statement:**

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

**IMPORTANT NOTE:**

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device has been designed to operate with an antenna having a maximum gain of 5.1dBi. Antenna having a higher gain is strictly prohibited per regulations of Industry Canada. The required antenna impedance is 50 ohms.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage

radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This device and its antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with IC multi-transmitter product procedures.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

The device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une

utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

# Power Usage

This device is an Energy Related Product (ErP) with High Network Availability (HiNA), and automatically switches to a power-saving Network Standby mode within 1 minute of no packets being transmitted.

**Network Standby:** 4.838 watts

# Registration

Register your product online at [www.onlineregister.com/dlink](http://www.onlineregister.com/dlink)



Product registration is entirely voluntary and failure to complete or return this form will not diminish your warranty rights.